SCIENTIFIC AMERICAN

Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1905, by Munn & Co.]

Vol. XCIII.—No. 21.
ESTABLISHED 1845.

NEW YORK, NOVEMBER 18, 1905.

10 CENTS A COPY.
$3.00 A YEAR.

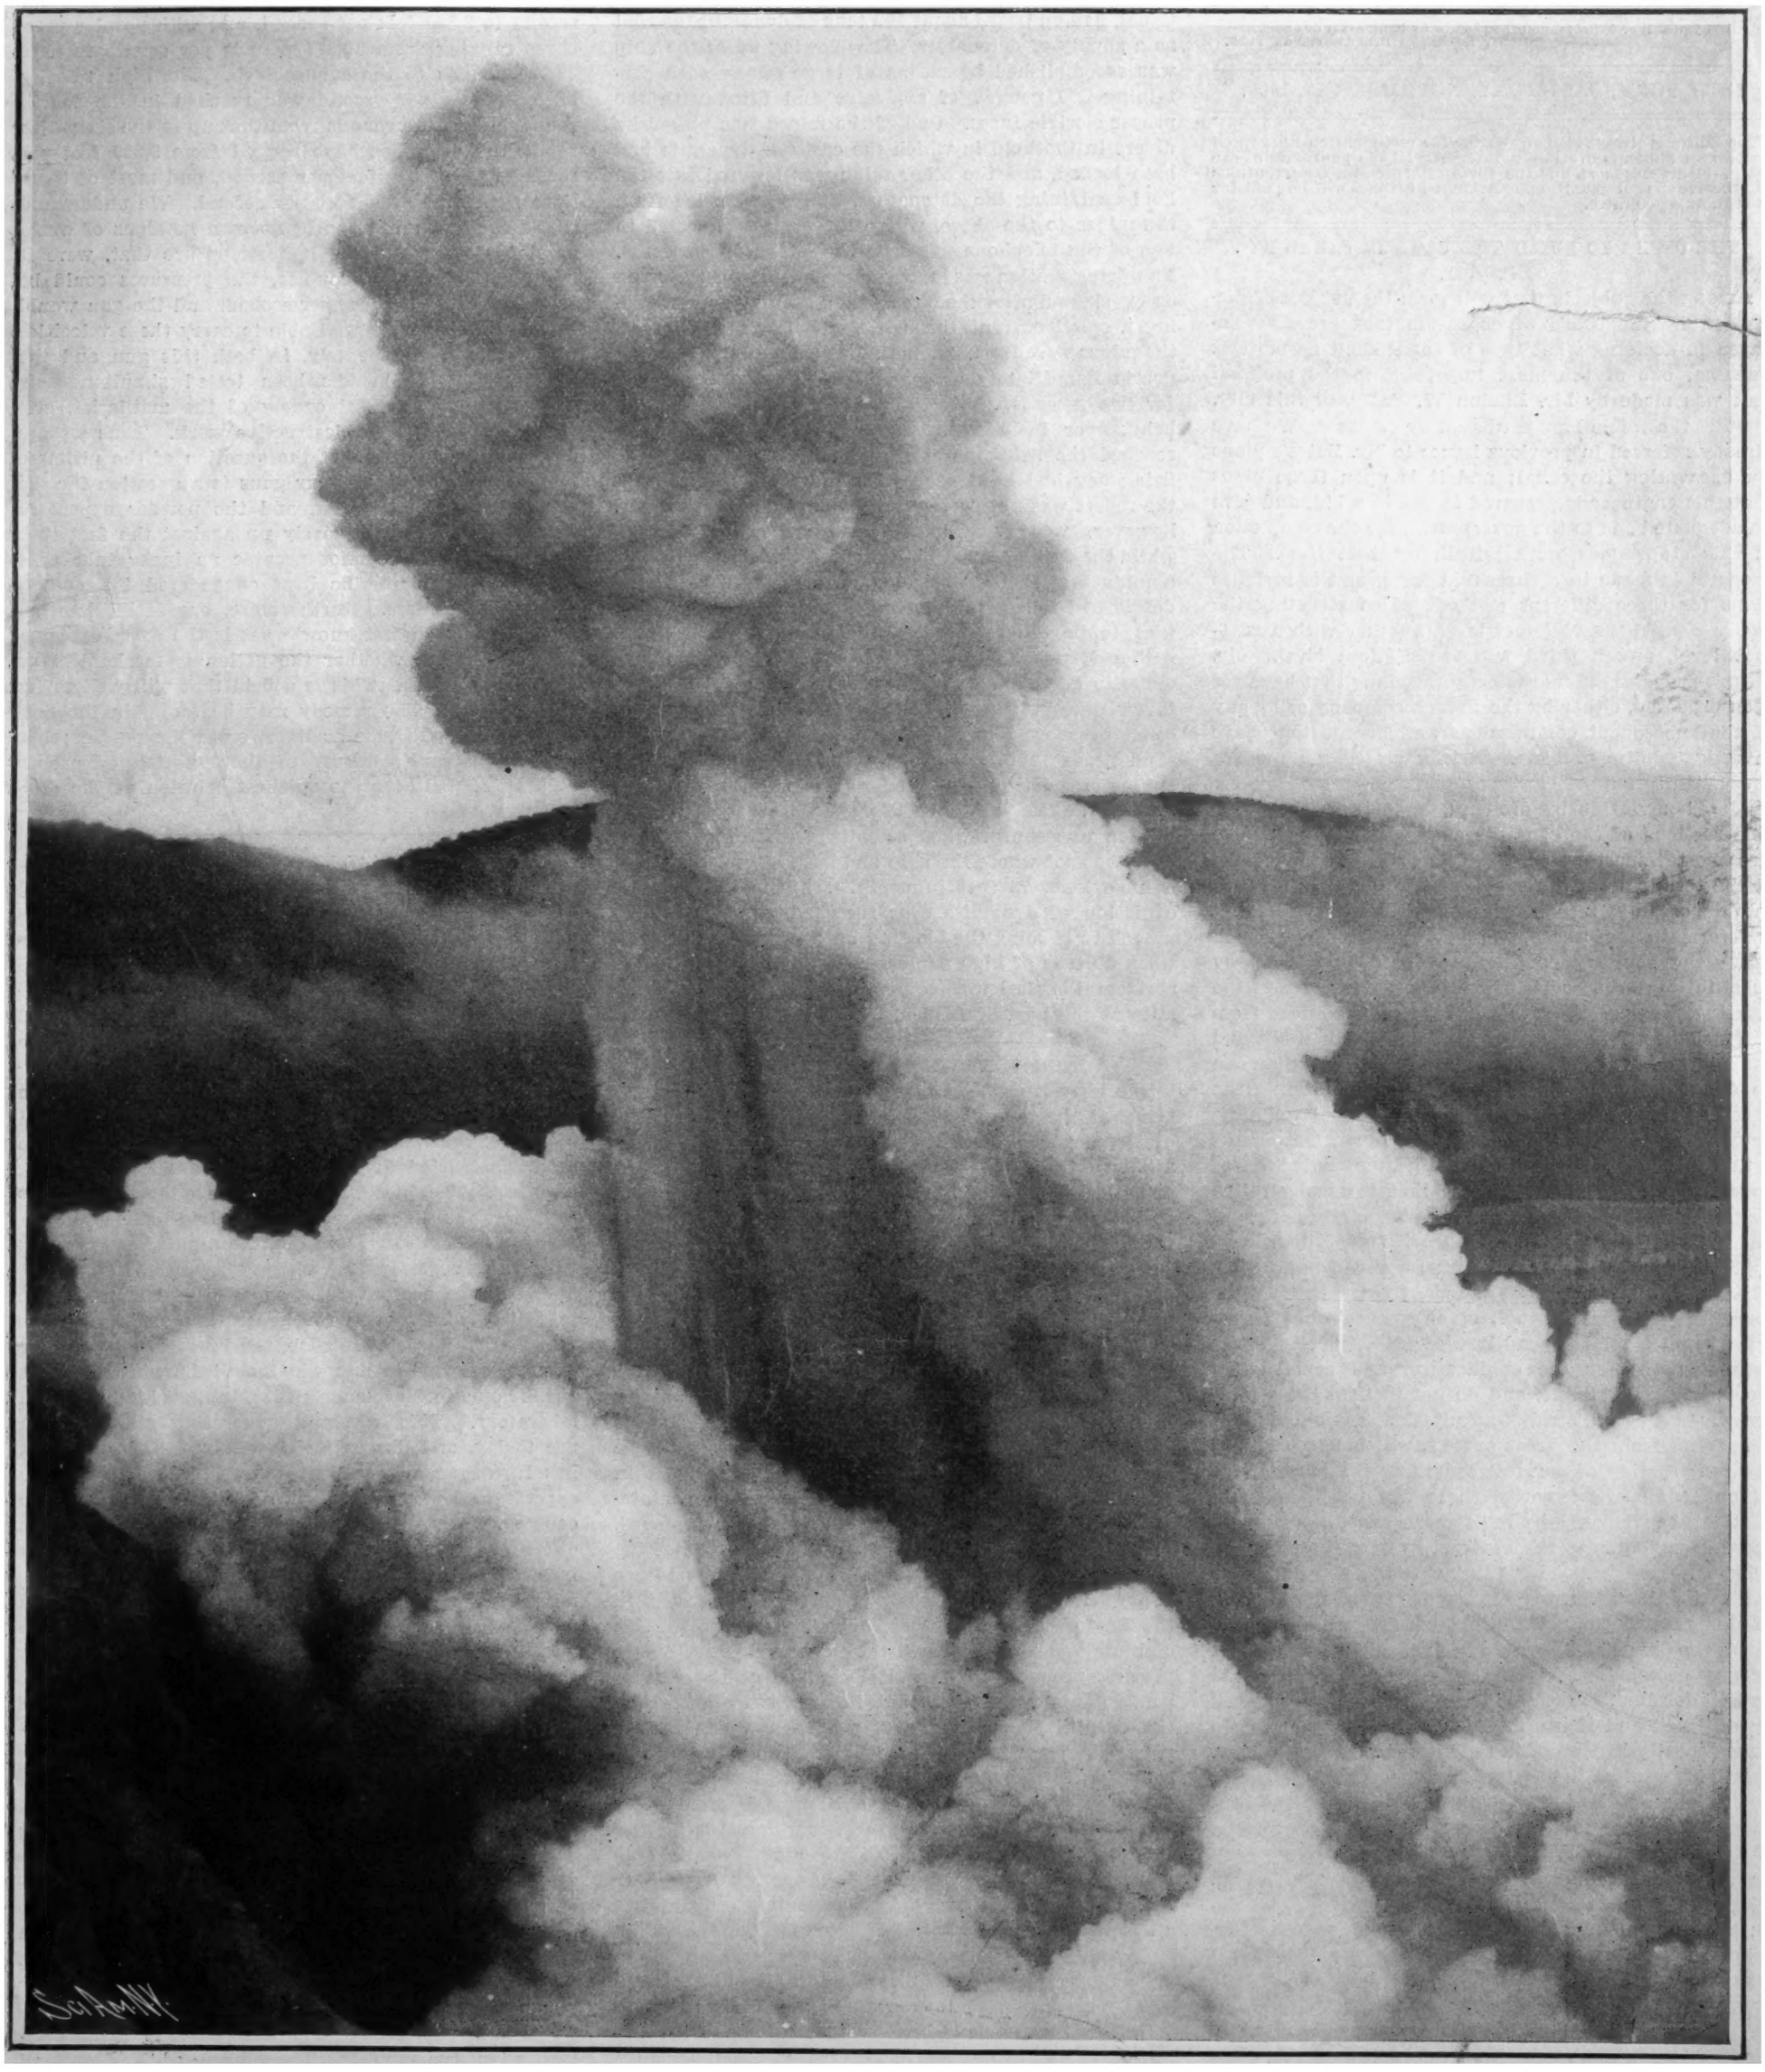

ONE OF THE RECENT GREAT ERUPTIONS OF THE POAS CRATER OF COSTA RICA.—[See page 400.]

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO., - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

TERMS TO SUBSCRIBERS

One copy, one year for the United States, Canada, or Mexico $3.00
One copy, one year, to any foreign country, postage prepaid. £0 16s. 5d. 4.00

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (Established 1845).....$3.00 a year
Scientific American Supplement (Established 1876)..... 5.00 "
American Homes and Gardens..... 3.00 "
Scientific American Export Edition (Established 1878)..... 3.00 "
The combined subscription rates and rates to foreign countries will be furnished upon application.
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, NOVEMBER 18, 1905.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

THE OFFER TO BUILD THE PANAMA CANAL BY CONTRACT.

Among the subjects that will form the subject of discussion by the board of engineers that are now engaged in deciding what type of canal shall be built at Panama, one of the most important is the proposal that was made by Mr. Lindon W. Bates, of this city, to build the whole Panama Canal by contract. We have already referred in previous issues to Mr. Bates's plans for excavating the canal; and it is upon these plans that this engineer is prepared to put in a bid, and give an adequate bond to the government, for the completion of this stupendous work within contract time. The proposal is made in a three-fold form, and it includes plans for three different methods of constructing the canal: one with a 96½-foot level, another with a 62½-foot level, and a third with a 26½-foot level. Mr. Bates's proposal differs radically from any that have yet been proposed, either by the French company or by any of the subsequent commissions and boards that have investigated the problem. Briefly stated, it involves the substitution of large, artificially-formed lakes, rendered navigable by dredging, in place of considerable sections of the canal as originally planned. The two most important of these lakes would be located at the terminals of the canal, and would open directly into the ocean by means of locks. Mr. Bates claims that the formation of these two lakes would greatly improve the sanitary condition of the canal zone, by substituting large bodies of fresh water in place of the existing swamps. A further advantage is claimed from the fact that the character of the dams to be built and their location is conducive to more rapid work than can be done under most of the existing plans, while the speed of transit of vessels through the canal would be greatly increased by the more direct course that can be sailed through the lakes, and the general reduction of curvature. Mr. Bates estimates that the comparative cost and time for completion of the three types of canal would be as follows: For a canal with a 26½-foot level, $135,000,000 and nine years' time; for a canal with a 62½-foot level, $125,000,000 and eight years' time; while for a 96½-foot level canal, seven years would be required and a total expenditure of $111,500,000. These estimates are for the engineering and construction work, pure and simple, and do not include the cost of government administration, sanitation, or policing.

Judging from the great success which has attended the construction of our railroads, and the more costly of our engineering works, there can be little doubt that the canal could be built more expeditiously and more cheaply under the contract system than by any other; and we cannot but think that if any responsible contractor, having a wide range of experience in work of this general character, can be found, who can command the financial backing and give to the government adequate bonds for the completion of the work, it would be best for the interests of the country to let the work by contract, and if possible, in a single contract. We have recently had proof in the city of New York of the excellent results that follow from placing these great engineering works in the hand of one single qualified man. We refer to the successful completion by Mr. McDonald of the $35,000,000 contract for the New York Subway, within the contract date set for completion. We give this opinion without any reference to the particular plan offered by Mr. Bates or any other engineer. The present board will decide once and for all what type of canal shall be built; but when their opinion has been delivered, the next important question will be as to by whom and by what system of management this enormous work shall be put through. We believe that the interests of the country and of the canal would be best served by letting the whole work by contract, in a single contract, if possible, subject to the oversight and final arbitrament of the engineering staff, and leaving the general administration, the sanitation, and the policing of the canal zone in the hands of the government, and preferably of the War Department.

THE SUEZ CANAL EXPLOSION.

Details have come to hand of the methods adopted when the steamship "Chatham," which recently sank in the Suez Canal with a load of dynamite on board, was removed by blowing up the vessel. Some curiosity has been expressed as to the way in which the detonation of this large amount of high explosive was made at once certain and safe, and we are indebted to an Egyptian paper published on the day after the removal of the wreck, for an accurate description of the greatest explosion of dynamite on record. The steamship "Chatham," when it took fire and was scuttled in the Suez Canal, had on board about 100 tons of dynamite, as well as a supply of detonators. The blowing up of the ship was accomplished by means of large mines, each containing 300 pounds of explosive and fitted with the proper electric fuses. One of the mines was placed by divers in the hold in which the cases of dynamite had been loaded, and the other mine was lowered into the hold containing the detonators. Cables were led from the mines to the shore, where they were connected to two of the telephone wires on the banks of the canal. The firing station was located three miles from the sunken wreck, and after the circuits had been tested by sending a small current through electric resistance fuses, the mines were fired. An enormous column of water and debris immediately arose, and ascended continuously for five seconds, the estimated height of the column being over 1,500 feet. The report of the explosion reached the firing point in sixteen seconds after the firing key had been depressed, and it was noted that the report was not particularly loud. The earth tremor, however, was felt almost instantaneously, in fact, while the firing key was still depressed. Although half a minute after the explosion the greater part of the debris had fallen, the air continued for over two minutes to be obscured with what looked like a mist. Although telephone wires were torn from the posts opposite the explosion, the blast was not sufficient to throw down the posts themselves. The water of the canal overflowed the surrounding country for a thousand yards in every direction, and fragments of the ship were distributed over a circle 1,200 yards in diameter. The enormous downward thrust of the explosion was shown when soundings came to be taken over the spot where the ship had lain. Here was found a huge hole, 73 feet in depth. This is the greatest explosion of dynamite ever recorded, the nearest approach to it being the blowing up of Hell Gate in 1876, when 50 tons of high explosive was detonated, and the accidental explosion some years ago of 30 tons of dynamite at the port of Lisbon.

HIGH VELOCITIES AND GUN EROSION.

The biggest problem in the development of war material at the present time, is to overcome the terrific erosion which burns out the inner tube of our modern high-velocity guns. The success of Admiral Togo in defeating the enemy by long-range rifle fire has directed attention more than ever before to the advantage of high velocity and big guns. There are two ways in which the punishing range of the gun can be extended; one is by increasing the velocity of the projectile, and the other is by increasing its weight. The disadvantages of increasing the weight are that less ammunition can be carried per gun, and that the loading of the gun is somewhat slower and its rapidity of fire is reduced. On the other hand, if the muzzle velocity be increased, the same striking energy can be developed at the same range without any increase in the weight of the projectile, and if a powder containing a high percentage of nitroglycerine be employed, there need be no serious increase in the weight of the charge. The United States government prefers to use a powder with less nitroglycerine than is present in the English cordite; but although it has succeeded in obtaining as high, and a little higher velocities at the proving grounds, this result is gained at the cost of using a powder charge that is over twice as heavy, the cordite charge for a 12-inch gun weighing 141 pounds, and our nitrocellulose charge weighing for the same gun, 350 pounds.

Nature, however, demands a heavy toll from those artillerists who seek to secure greater range by higher velocity; for in order to secure high velocity, the powder pressures within the gun must be raised to such a degree that the corresponding temperature plays the Old Harry with the inner tube, the white-hot gases melting it away, just as a block of ice is melted by a stream of boiling water. Up to a certain limit, pressures and temperatures may be raised and velocities increased without serious injury to the lining of the gun; but above that point the inner tube begins to deteriorate, the rifling is burnt out, the projectile fails to rotate on its axis, and begins to tumble end over end in its flight.

We do not hesitate to say that to-day the greatest problem in the development of artillery is the prevention of gun erosion.

There are no great mechanical difficulties to be encountered in getting high velocities. There are to-day at Sandy Hook under test by the Board of Ordnance of the army, two 6-inch wire-wound guns, each of which has shown muzzle velocities far in excess of anything that is used either ashore or afloat to-day. One of these is a design by Gen. Crozier, the present head of the Bureau of Ordnance, and the other is the well-known Brown wire-wound gun, the distinguishing feature of which is its inner core of laminated steel plates. We have before us some of the results that have been obtained during the tests of the latter gun at Sandy Hook. These include sixty-five rounds fired with powder charges of from 32 to 72 pounds, with corresponding muzzle velocities of from 1,913 feet per second to 3,380 feet per second, and with powder pressures ranging from 12,274 pounds per square inch to 43,370 pounds to the square inch. The high velocity of 3,123 feet per second was reached in the fourth round, and in the rounds from that up to the sixty-fifth round the velocities have ranged from 3,200 feet per second up to 3,380 feet per second, and most of them have been over 3,300 feet per second. We understand that structurally the gun has shown no signs of weakness whatever; and the indications are that, were it not for the erosion troubles, the pressures could be carried up to 3,500 feet per second, and the gun would prove to be perfectly well able to carry these velocities in service. Unfortunately, in both this gun and the Crozier gun, which has been tested simultaneously with it, that universal enemy of the artillerist, erosion, is getting in its destructive work. Thus we are once more reminded that the question of the ultimate practicable velocities of our guns is a question for the chemist, the metallurgist, and the powder expert to determine. We are squarely up against the fact that our steel makers cannot provide an inner tube that will endure the terrific heat engendered by modern smokeless powders. Furthermore, our artillerists admit that they do not know what is the exact explanation of erosion, whether the action is mechanical or chemical, or both. This is a field that will well repay investigation. The remedy may be found in the projectile, or in the tube or liner, or in the powder; but probably a careful study of the question of proper obturation will give the quickest solution of the difficulty.

THE ELECTRICAL VALUE OF WIND POWER.

The electrical utilization of wind power has obtained considerable popularity in Europe, and for several years now the Danish government has been conducting a series of experiments with windmills, to ascertain the relative amount of electrical power that can be generated thereby. In this country similar experimental tests have been tried, and although the instances are not numerous and are somewhat isolated, the data furnished indicate a useful future for this form of prime mover. This is particularly true of the agricultural regions of the West, where innumerable windmills have been constructed in the past ten years for irrigating purposes. The question of harnessing these windmills to motors for the generation of electric light, and even power, is likely to receive the attention of the farmers within the next few years.

Probably one of the first experimental efforts made to utilize wind power for generating electricity was that of Dr. Charles F. Brush, the inventor and pioneer in electrical experiments, who installed a windmill plant at his home in Cleveland in 1889, to light his house and laboratory. This windmill generating station is in use to-day, and during its sixteen years of operation, has furnished an excellent example of what may be expected of windmill motors in that section of the country. The fact that the wind power and variation differ considerably in the several States should be taken into consideration, and the value of this form of prime mover may prove more profitable in one section than another. The constant or average wind velocity for the year must be considered, rather than for a month or season.

The simplicity of the windmill generating plant is one of its chief features. In Dr. Brush's plant the dynamo is connected by pulleys, so that fifty revolutions are made to every one of the windmill, and the normal speed of the former is 500 revolutions a minute. In an ordinary wind with a velocity of 8 miles an hour this windmill works the dynamo to its normal speed, developing a load of 12,000 watts. Unfortunately, however, a wind velocity of 8 miles an hour cannot be depended upon steadily in the vicinity of Cleveland, and a storage battery is necessary for equitable operation. The average wind velocity for the United States is given at 8 miles an hour, but in many parts of the country a velocity of only 4 and 5 miles is maintained throughout the summer. The dynamo of the Cleveland plant is arranged to be automatically put into operation at 330 revolutions per minute. The working circuit opens automatically at 70 volts and closes at 75 volts.

In the basement of the house twelve batteries of 34 cells each are installed, and these are charged and discharged in parallel. With each having a capacity of 100 ampere-hours, it is possible to light 100 16-candle-power incandescent lamps. The successful working of this plant for lighting the house and laboratory has demonstrated the value of a windmill generating set for light loads.

The question of the general construction of the windmill itself has been the subject of considerable experiment. In this respect the Danish experts reached the conclusion that a curved wing would develop nearly twice as much power as the plane wing. This is better stated thus in figures: While the maximum power obtained from a curved wing was 108 gramme-meters per second per square meter of surface, the power obtained from a plane wing was only 42 gramme-meters. Grooved wings gave power equal to curved wings, and this form of windmill wing has been used ever since in all of the Danish tests. Four wings make the most convenient form of windmill in use, and a constant proportion between the length and width of the wings gives the highest results. Thus, to secure the most satisfactory surface area, the width of each wing should be from one-fourth to one-fifth the length, and the greatest width should be about three times as great as the narrowest part. The greatest width of the wing is placed in front, so that the wind is caught and carried toward the center, where it finds ready space for its escape. In such a windmill the tip of the wing should develop a speed 2.43 times that of the wind when working. The windmill plant at Wittkeil, in Schleswig, has demonstrated certain facts that carry out the foregoing statements. In this case the windmill has an enormous wind surface. The diameter of the windmill is about 40 feet, and an effective wing space of nearly 1,000 square feet is presented to the wind. The windmill develops 30 horse-power with a normal speed of eleven revolutions per minute. It operates a shunt dynamo that makes 700 revolutions per minute, and develops 160 volts and 120 amperes. This full load is developed when the wind is blowing at the rate of about 8 miles per hour. The windmill furnishes electricity to light the town of Wittkeil, and small motors and lamps are connected to the storage battery, which maintains a voltage of 110. The battery has a capacity of 66,000 watt-hours. This plant has proved so satisfactory that it is being enlarged, and as a permanent lighting station it is likely to prove of unusual importance in the development of modern electricity by windmills.

In the adaptation of the windmill generating plant to commercial purposes in this country, experiments have taken some peculiar forms. In order to eliminate the storage battery, the windmill must be able to store up its energy in some other way. A number of methods to do this have been suggested. At present the extra cost of constructing the storage battery makes the initial cost of the plant more expensive than the first cost of an oil or steam-driven plant. After the first installation the cost of operation is very little, and if it were not for the constant oversight required of the storage battery, the plant would work entirely without any watchman. The storage battery requires the attention more or less of an electrical expert, and the labor question enters into the problem of operation. By eliminating the storage battery, the cost of installation, the repair items, renewals, and the labor item would all be reduced. One patent tested in this country was to utilize a compressed-air plant in connection with the windmill. The dynamo is direct-connected to the air compressor, and the power thus stored up could then be utilized as needed. But in this case the extra amount of mechanism increases the cost of installation even more than the storage battery. The compressor, moreover, requires pretty constant watching, and the windmill generator thus approaches no nearer the self-regulating and operating machine than before.

Another method has been employed, which appears to contain some possibilities for the Western farmers, where windmills are already in use for pumping water for irrigating purposes. By means of storage tanks, the windmill pumps the water to a great height, and then the pressure developed by the falling water is utilized for driving a water turbine or wheel. In this case the dynamo is driven very much like any hydraulic generating plant, and ordinary motors and generating sets could be adapted to the work. The turbo-generating method of utilizing the windmill for electrical development would require nearly as much expense for initial installation as any of the other methods, but once in working order it would prove purely automatic and self-regulating. The great size of the tank required to develop sufficient horse-power to operate the generators is one of the drawbacks to this system. The loss of efficiency would be quite considerable, and the ordinary windmill now in use for electrical generation would have to be increased in size or supplemented by several others. Such a storage tank would, moreover, have to be large enough to hold sufficient water to run the turbo-generators for at least eight or ten hours consecutively. Even then the plant might be put out of work for ten hours or more through the failure of the wind. All would depend upon the average velocity of the wind in the region where the plant was installed. The storage of water by means of windmills in reservoirs on the hillsides has been suggested, thus furnishing an artificial supply of water for hydraulic purposes. In this case a sufficient number of windmills might be installed to pump the water in a huge reservoir that would never be exhausted. The results of such an experiment would certainly prove of interest to engineers, but it is somewhat doubtful if the returns would pay for the heavy outlay of funds for the windmills and the storage reservoir. Yet despite these many serious drawbacks to windmill electrical engineering, it is quite apparent that in the course of time the power of the wind will be used more and more for developing electricity, and with new mechanical methods better results are bound to follow.

ANOTHER NORTH POLE BALLOON EXPEDITION.

According to a notice in the Vossische Zeitung, Marcillac contemplates taking a trip to the North Pole by balloon, similar to that of the unfortunate Andrée. As a safeguard against such accidents as befell the latter, Marcillac intends to carry with him a wireless telegraph apparatus by means of which the balloon will be kept in permanent connection with the starting station.

As regards the technical particulars of the Marcillac scheme, it may be said that the balloon is to be provided with an electromotor capable of evolving driving power during 200 hours, which would be intended either to drive the balloon in the case of weak winds, or to impart to it a course different from the direction of the wind. The balloon is to receive from 5,000 to 5,500 cubic meters of gas, supplied by a novel apparatus in the car. Several instruments have been constructed by Marcillac especially for this expedition—for instance, an amenoscope for investigating the air currents; a velometer for measuring the speed of the balloon; a horn intended to give acoustical signals; and finally, what he calls a "thermogen," viz., a special device for counteracting the influence of the polar cold on the gas of the balloon.

Spitzbergen is to be chosen as starting-point, as in the case of the Andrée expedition. The cost of this trip is estimated at 90,000 francs, while that of the Andrée expedition was about double the above amount.

THE PREVENTION OF "COLDS."

Now that the season for "colds," coughs and neuralgic pains is with us, the careful man is on the lookout for such preventive measures as will guard him against the "eager and nipping air" that may prepare the way for a winter's sickness. It is the proper adaptation to his environment that must settle the question of his immunity against the ever threatening weather ailments.

With the changeable climate of our northern latitudes the task is often a difficult one. Thus a sudden drop in temperature is often followed by a veritable epidemic of catarrhal troubles.

The ordinary phenomenon of a "cold" is explained by a rapid cooling of the surface whereby the superficial circulation is temporarily arrested and internal congestions are produced. The primary effect is generally upon the mucous membranes of the nose, throat, and upper air passages. In consequence of this revulsion chilliness, lassitude, headache, sneezing and cough follow in turn, and the patient becomes generally miserable. Then, when it is too late, he doubts his resisting powers against draughts, cold rooms, undue exposure and the like, and is ready to resign himself to the coddling process for the remainder of the winter. Strange as it may appear, it is this misguided carefulness that explains most of the chronic catarrhs of the season.

First on the list of such causative agencies are our overheated and ill-ventilated apartments. Eminent medical authorities maintain that the sudden change from an overwarmed room to the cold air outside has more to do with the production of "colds" than all other supposed agencies combined. The air passages, after having been dried, and, so to speak, baked in our living rooms, are not only peculiarly sensitive to cold, but are in a condition least liable to resist the influences of the change.

The same principle might apply to overheating the body by too much clothing and enfeebling the skin by confined perspiration. The exact contrary condition results from inurement to low temperature and the creation of a habit of natural resistance. The man who is accustomed to bare his throat to the blast never suffers from tonsilitis, and the one who is used to the cold morning plunge never knows a shiver, even in zero weather. The real moral is to face the cold with a bold front, to conquer rather than to shrink from it and be overcome in the end. The hardened man makes his skin an ever-ready adjuster to all variations of temperature. The feebler one can approach such a state of protection and may in the end equal it.

A like principle applies to exercise. With ordinary garments the well individual never suffers from cold while in motion, but the one who sits or lies in a cold room or in a draught from open door or window is sure to become a victim of his indiscretion.

These are simple enough rules in themselves, but few think of applying them to individual needs until reminded of their lost opportunities.

The worst of all is that a "cold" taken in early winter is apt to linger and thus prepare the system for even more distressing ailments. The very lack of vital resistance that invites the first attack of catarrh is apt to intensify the predisposition to subsequent colds. This in a great measure explains the prevalence of pneumonia during the inclement season. The microbe never attacks a healthy membrane, but lies in wait for the local debilitation which furnishes the soil for the seed.

No more forcible argument could be used in favor of preventive measures against the slightest respiratory trouble that may show itself at this time. Nothing lowers the vital resistance against all winter diseases more than the initiative and apparently insignificant "cold."—N. Y. Herald.

SCIENCE NOTES.

An important item in the extension of the work of the Bureau of Chemistry has been the establishment of inspection for imported food products. As a result food products imported to this country have been greatly improved. In former years the United States was regarded as the dumping ground for the refuse teas of the commerce of the world. Many years ago, in order to overcome this evil, a system of inspection of imported teas was established and has since been maintained. Under the beneficent working of this system Americans are now certain of being able to purchase pure and wholesome tea, since it is almost impossible for spurious and adulterated teas to find their way into this country. Congress has now extended this system of inspection to all foods, beverages, and condiments imported into the United States. There is every reason to believe that when this system is thoroughly established an improved condition comparable to that which has taken place in teas may be anticipated.

The bactericidal effect of wall-paints has been studied ately by Dr. Beaufils (see Revue Générale des Sciences) according to the following method: A layer of paint having been spread out on wooden boards or glass plates, a culture of microbes was placed on this layer after being dried, and the plate thus prepared was kept in the laboratory protected against dust. At regular intervals some microbe colonies were removed and spread out on an appropriate medium or used in inoculating animals. An unpainted check-plate served to ascertain the action exerted by the paint on the vitality and virulence of the microbes, this action being shown generally to be distinctly bactericidal while varying according to the nature of the painting. The colors of enameled porcelain are for instance found to be much more active than oil colors, especially in regard to the bacillus of tuberculosis. The fact that these paints exert a constraining action on the latter bacillus would seem to be the most important practical result of these researches.

When chloride of silver is exposed to sunlight it assumes a violet tint and gives off chlorine. A chemical change thus occurs, and the change of color must be attributed to the formation of a new compound. But there seems to be a great difference of opinion as to the nature of this effect. D. Tommasi, in taking up the question, considers that the chloride of silver, under the influence of the rays, undergoes a partial decomposition which is proportional to the surface, the exposure, and strength of the light. A very small quantity of silver chloride is transformed into Ag_2Cl or Ag_4Cl_3 (this chloride has been directly obtained by Von Bibra) which is finally decomposed into silver and chlorine by a long exposure to the sun, so that the violet chloride of silver contains variable quantities of Ag Cl and the two chlorides mentioned above, and also metallic silver. As there are some differences of opinion as to many of the properties of silver chloride, M. Tommasi undertook the study of these properties, and gives the following results. The white chloride of silver when exposed to the sun in a glass-stoppered flask containing water saturated with chlorine, in a short time acquires a slight violet tint which does not become any darker on a long exposure. Here a state of equilibrium is formed between the action of the light upon the white chloride and the action of the chlorine upon the violet chloride, which has the effect of preventing the light from blackening the white chloride, and the chlorine to bleach the violet chloride. Again, dried white chloride in a sealed glass tube becomes violet when exposed to the sun and becomes white again when the tube is placed in the dark. When the dry violet salt is shaken with chlorine water in the dark, it whitens in a short time. He also finds that when the violet chloride is boiled with nitric acid, it is not bleached. Bromide of silver acts in an analogous manner, but the iodide is not affected by exposure to the sun.

THE VISITING BRITISH FLEET.

The presence of a British squadron of six armored cruisers in American waters under the command of Prince Louis of Battenberg has been marked by a round of festivities and social functions, that were intended as a national response to the special courtesies extended to the United States warships whenever they are in English ports. Unquestionably, the most striking feature of the visit was the imposing spectacle presented by the presence of this squadron and of the second and fourth divisions of the United States North Atlantic fleet in the North River, where the vessels were anchored in a long line, which stretched from opposite Grant's Tomb to opposite Fifty-second Street, a distance of over two and a half miles. In the line as thus formed were eighteen battleships and armored cruisers, practically all of them of modern construction, and most of them embodying the latest ideas of armament and armor protection that prevailed at the opening of the late Russo-Japanese war. At the head of the American line, opposite Grant's Tomb, were four of the six handsome vessels of our latest armored cruiser class, the "Maryland," "Colorado," "Pennsylvania," and "West Virginia." Then followed eight battleships: "Massachusetts," "Iowa," "Illinois," "Alabama," "Kentucky," "Kearsarge," "Missouri," and "Maine," the "Maine" being the flagship of Admiral Robley D. Evans. Immediately astern of the "Maine" was H. M. S. "Drake," the flagship of Prince Louis of Battenberg, and astern of her were five identical armored cruisers of the "County" class, namely, the "Berwick," "Cornwall," "Essex," "Bedford," and "Cumberland."

The ships of the visiting squadron possess particular interest, because of the fact that they represent some of the very latest ships that have been put into commission in the British navy, and for the reason that the flagship invites comparison with our armored cruisers of the "Pennsylvania," class, which were anchored a mile or so further upstream. The "Drake" is one of four armored cruisers built in 1901, the others being the "King Alfred," "Leviathan," and the "Good Hope." All four of the vessels showed excellent speed on their trials, exceeding 23 knots an hour, while the "Drake" itself, after being fitted with new propellers, made for several hours a speed of 24.1 knots an hour, which constitutes her the fastest armored warship afloat to-day. Her dimensions are length 500 feet, 71 feet beam, and 26 feet draft; and as these dimensions are so nearly those of the four United States armored cruisers anchored in the same line, a comparison is of considerable interest. The "Pennsylvania" is 502 feet long by 70 feet broad, with a draft of 26½ feet. The "Drake" displaces 14,100 tons, as against 13,400 tons for the "Pennsylvania." The armor protection of the "Drake" is superior, as she carries 2,700 tons against 2,219 tons for the "Pennsylvania." The "Pennsylvania" showed 22.4 knots for 27,750 horse-power against 24.1 knots for 31,450 horse-power developed on the "Drake." In a comparison of armament the advantage lies somewhat with the "Drake" with two 9.2-inch guns and sixteen 6-inch guns against four 8-inch guns and fourteen 6-inch guns on the "Pennsylvania"; but we prefer the method of protection adopted for the "Pennsylvania," inasmuch as the guns on the gun deck are mounted within a continuous wall of armor, whereas on the "Drake" these guns are protected by isolated casemates.

It is interesting, just here, to compare the armored cruiser classes of later design now under construction for the respective navies. The United States has four vessels of the "Washington" class, which, with practically the same protection as the "Pennsylvania" class, are armed with four 10-inch and sixteen 6-inch guns, the displacement of the ships being 14,500 tons, and the speed 22 knots. These ships may be compared with the British "Warrior" class, of 13,500 tons and 22 knots estimated speed, which are to carry six 9.2-inch guns and four 7.5-inch guns. It is noticeable that the contract horse-power has been reduced from 30,000 in the "Drake" class to 23,500 in the "Warrior" class, the speed and the horse-power being about the same as that called for in our own "Washington" and "Tennessee."

The five cruisers moored astern of the "Drake" belong to a class of ten ships known as the "County" class. The whole ten have been completed, and have had their trials and are now in commission. The vessels with which they are most nearly comparable in our own navy are the semi-armored cruisers "Charleston," "Milwaukee," and "St. Louis," and the reader can compare these vessels for himself by means of the accompanying table. Taking the "Berwick" for her class, her dimensions are length 440 feet, beam 66 feet.

(*Continued on page 399.*)

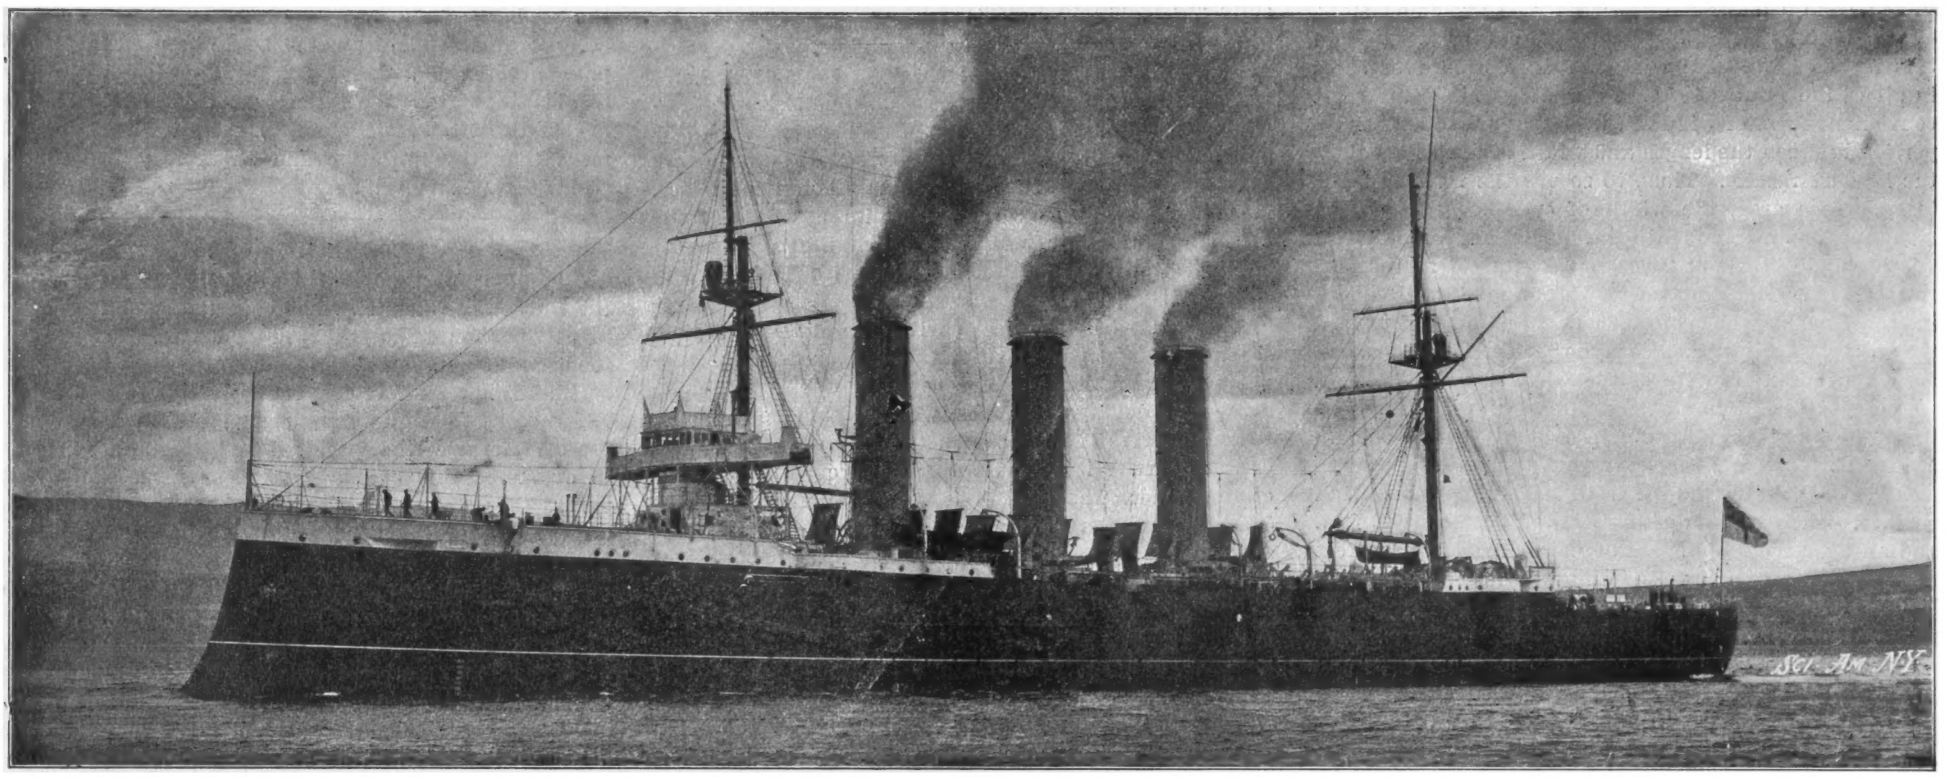

Displacement, 9,800 tons. **Horse Power,** 22,680. **Speed,** 23.6 knots. **Maximum Coal Supply,** 1,600 tons. **Armor:** Belt, 4 inches; gun positions, 5 inches. **Armament:** Fourteen 6-inch; ten 3-inch; eleven smaller guns. **Torpedo Tubes,** 2 submerged. **Complement,** 678.

Armored Cruiser "Berwick." Also "Cornwall," "Essex," "Bedford," and "Cumberland."

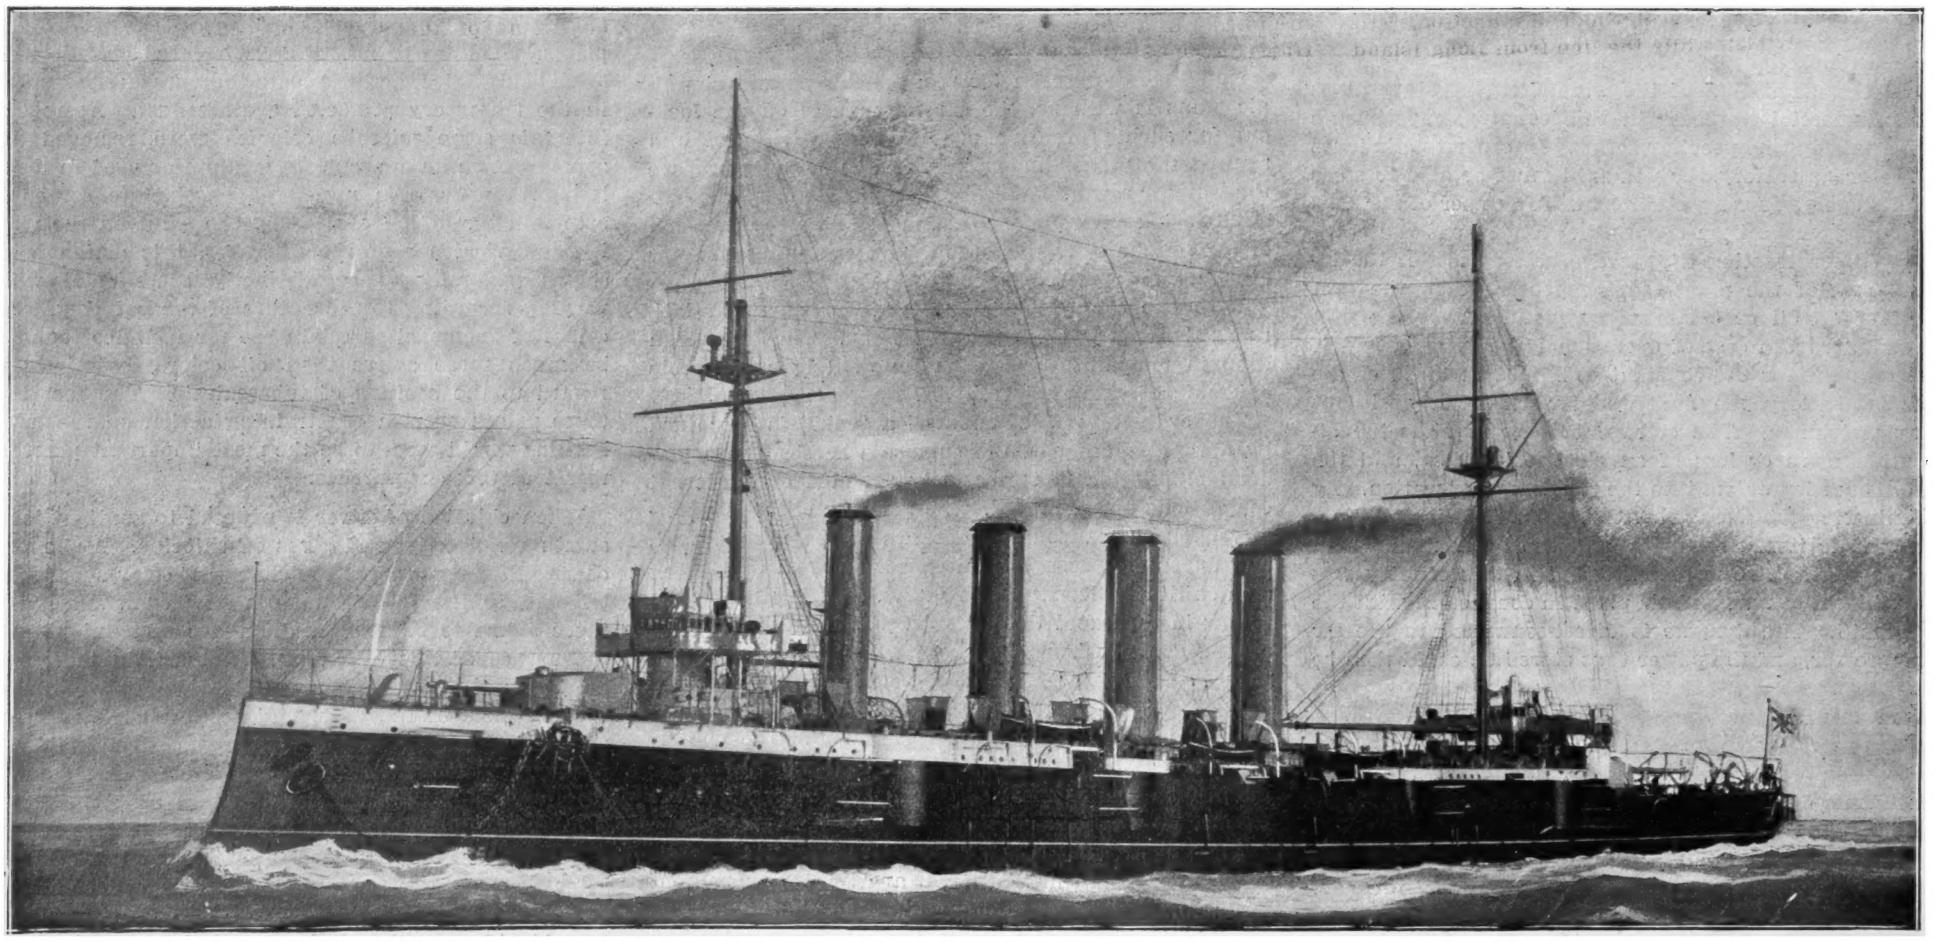

Displacement, 14,100 tons. **Horce Power,** 31,450. **Speed,** 24.1 knots. **Maximum Coal Supply,** 2,500 tons. **Armor:** Belt, 6 inches; gun positions, 6 inches. **Armament:** Two 9.2-inch; sixteen 6-inch rapid-fire; twelve 3-inch rapid fire. **Torpedo Tubes,** 2. **Complement,** 900.

Armored Cruiser "Drake." Flagship of the Visiting British Squadron.

VISIT OF THE BRITISH SECOND ATLANTIC SQUADRON.

THE LONG ISLAND RAILROAD ELECTRIFIED.

BY A. FREDERICK COLLINS.

The gigantic undertaking of converting the Long Island Railroad from a system using steam to an electrically-operated one marks the beginning of a new era in transportation in this country, for it is the first time in the history of railways and electricity that the feat has been accomplished. Quite true it is that the New York Central will exceed it in magnitude, but it will be at least two years before the work now going on will be completed, while the steam locomotive has already given way to the electric motor car on a large section of the first-named railroad, the inauguration having just taken place.

At the present time there is in operation a total mileage, when reduced to a single-track basis, of 97.5, and this is divided among the routes between Flatbush Avenue, Brooklyn, and the Belmont race track; between Ozone Park and Rockaway Park, and between Jamaica and Springfield Junction. During the next few months other portions of the road, or specifically, from Hammel to Springfield Junction, will be similarly electrified, while the line from Long Island City to Port Washington, and a short feeder from Whitestone Landing to Whitestone Junction, will be ready within a year and a half.

The progress and extensions of the electrification of the Long Island Railroad may be seen by referring to the map shown on page 398, and its inspection will serve to indicate in a measure the complicated nature of the traffic involved; thus there are two important terminals in the Borough of Brooklyn, and the roads leading from these form a network of lines over which there is conducted a heavy through as well as a suburban service. The Flatbush terminal connects directly with the Brooklyn Rapid Transit elevated lines, and these in turn lead to the Brooklyn Bridge and the Broadway Ferry. When the subway and tunnels are completed by the Interborough Rapid Transit Company, under the East River from the Battery in the Borough of Manhattan to Flatbush and Atlantic Avenues, Brooklyn, the new electric road will also connect with them, so that passengers arriving at the Flatbush Avenue terminal from points on Long Island will be favored with a short and quick route to the heart of Manhattan's financial district.

The extent of the service may be in a measure judged, when it is stated that on the Atlantic

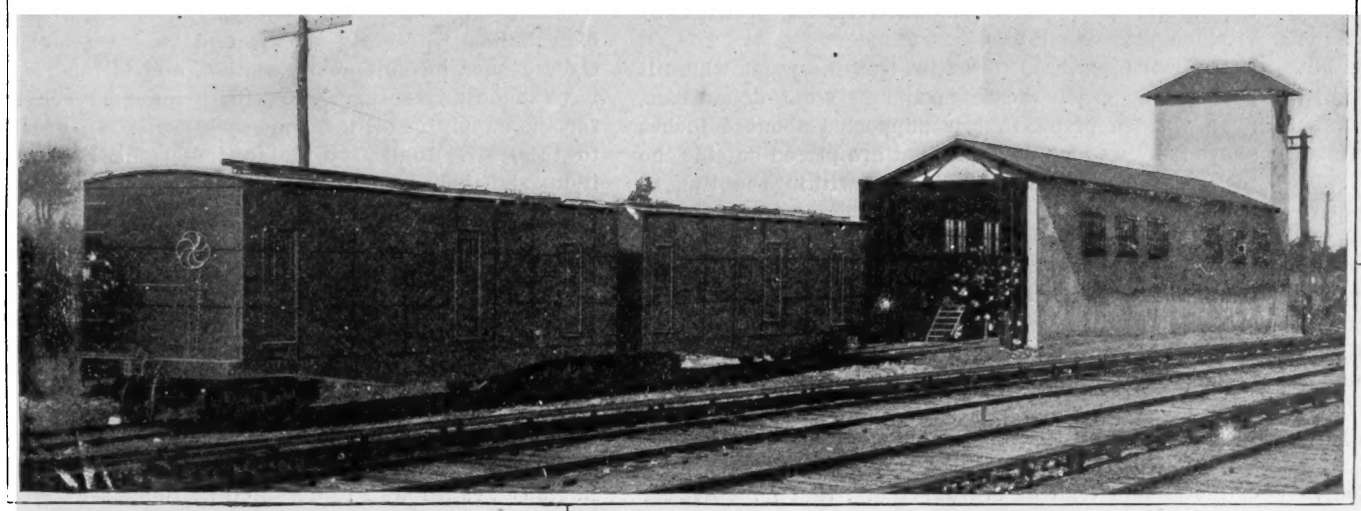

Two Portable Sub-Stations and Shelter House for Same.

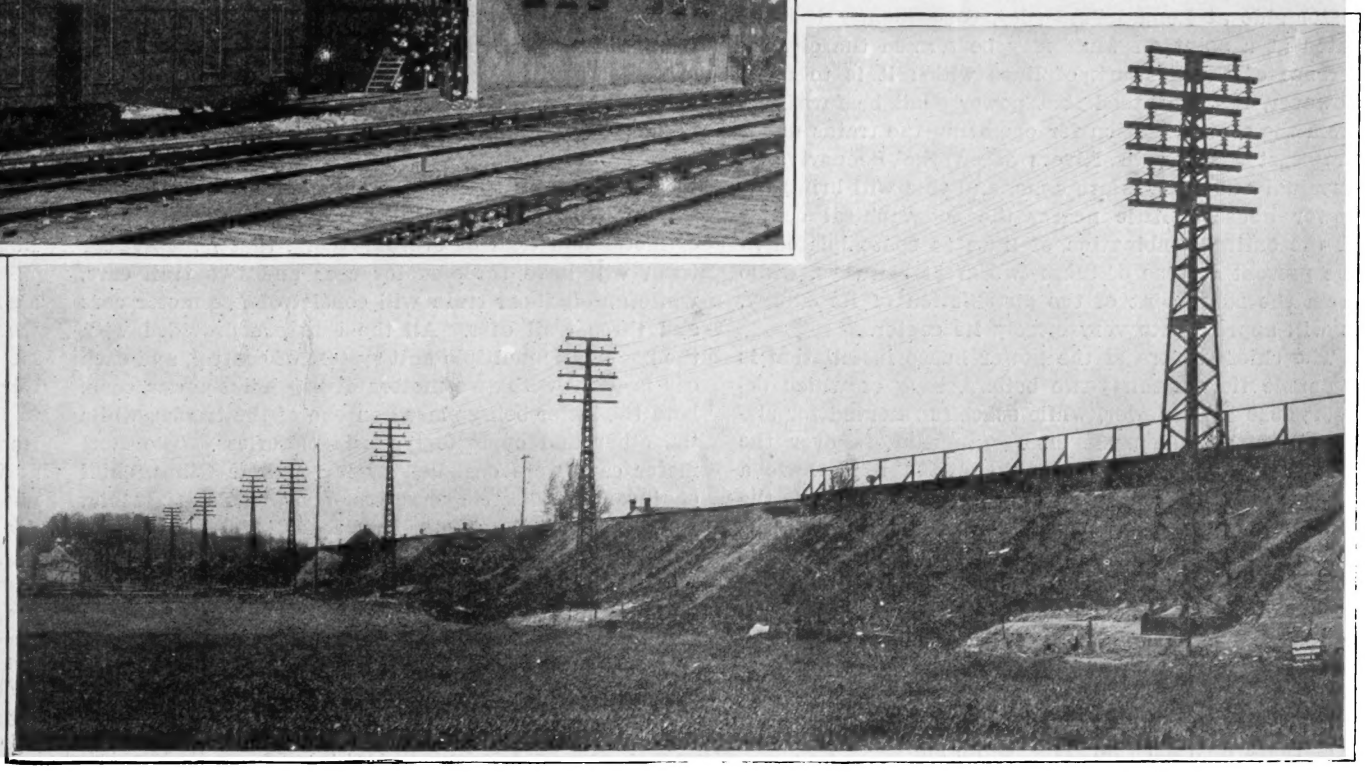

View of Trunk Transmission Line Between Long Island City and Woodhaven Junction, Showing Latticed Steel Poles.

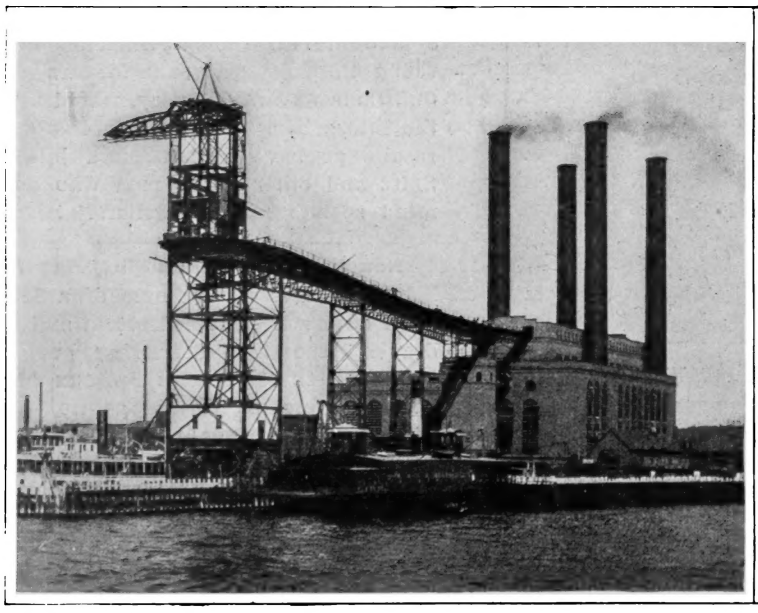

Long Island City Power Station and Huge Gantry Crane for Loading Coal from Barges.

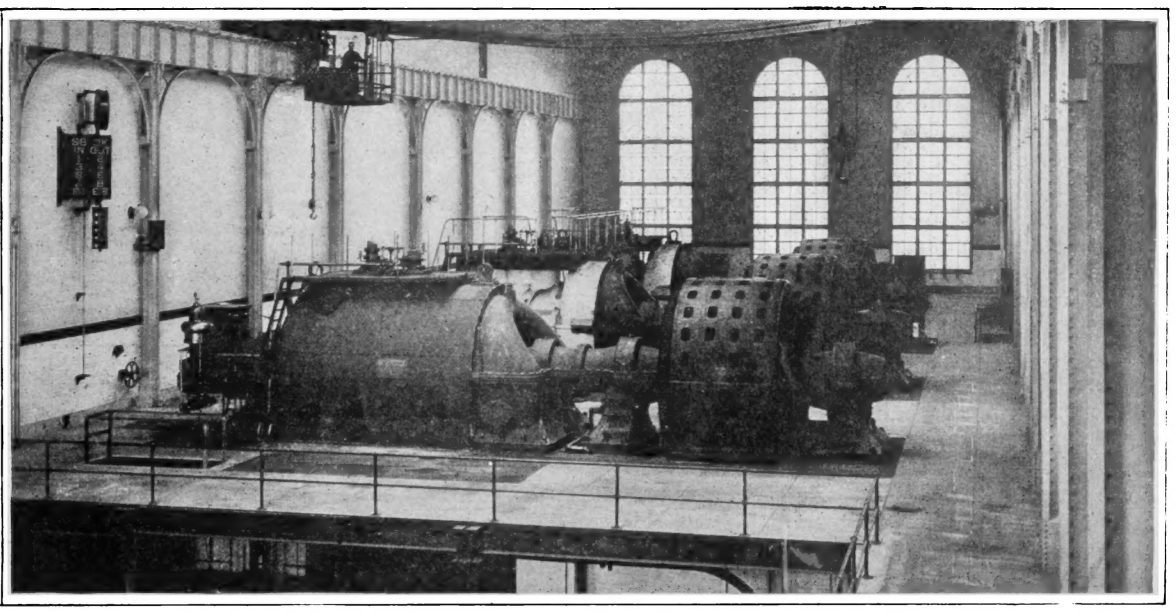

View of Engine Room Floor, Showing 7,500-Horse-Power Steam Turbines Direct Connected to 5,500-Kilowatt Generators.

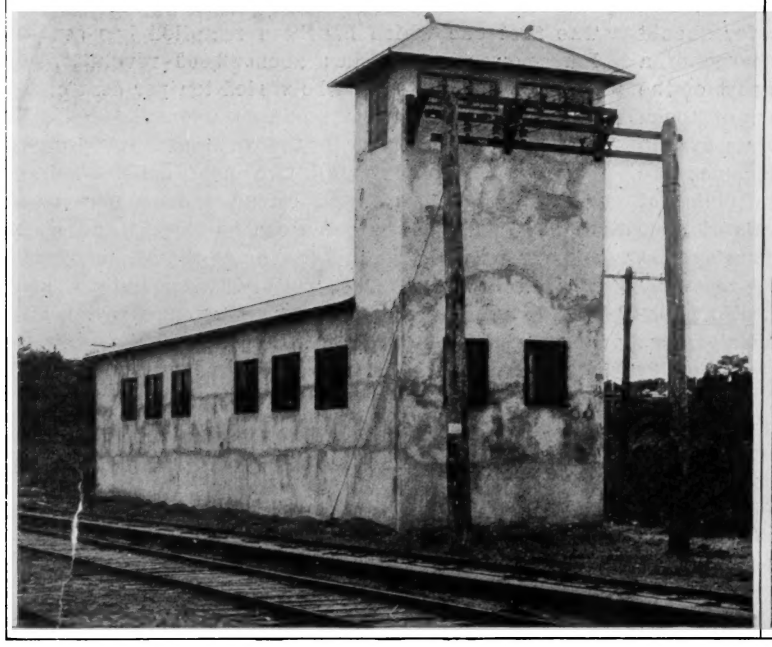

Steel and Concrete House for Housing Two Portable Sub-Stations.

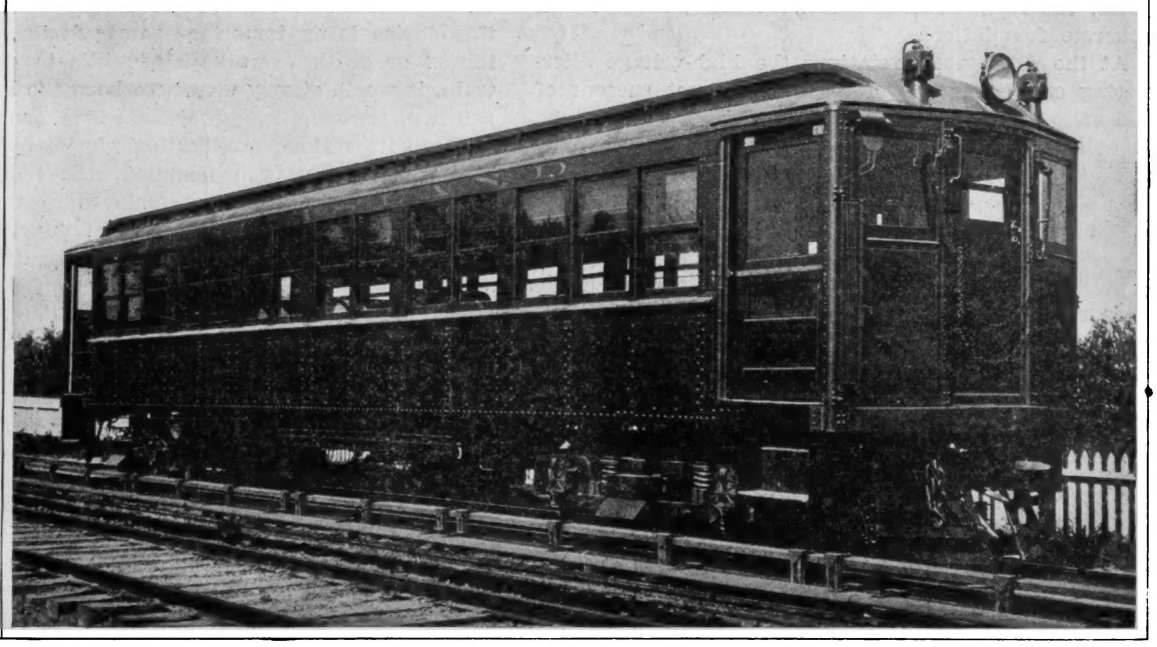

One of the New All-Steel Motor Cars.

ELECTRIFYING OF THE LONG ISLAND RAILROAD.

Avenue line trains are not only run from the suburban towns on either shore of Long Island, but a large local business is also done in carrying passengers from Flatbush Avenue to Jamaica, besides a heavy excursion traffic to Rockaway Beach and to the race courses at Aqueduct, Metropolitan, and Belmont tracks. When the Pennsylvania Railroad Company completes its elaborate plans, another extension of the electric service will probably be found necessary; but with the Long Island's great project finished, it will be an easy matter, compared with the present change from steam to electricity, to equip as much of the remaining road as may seem desirable.

The current for operating the trains of the entire system is generated at the new power house on the water side at Long Island City, consequently it is located at a point on what may be termed the circumference of the network of lines which it is to feed; however, it is intended that power shall be furnished from the central station for operating the trains under the East and North Rivers when the Pennsylvania terminal and tunnels are done, and this will bring the power house a little nearer the geographical center of the entire combination of lines as contemplated in the present scheme of these two great railways, while from the standpoint of the distribution of its energy, it will approximate very closely its center.

The chief feature of the power house installation is a double tier of thirty-two boilers, each of which develops 520 horse-power, while space is reserved for sixteen more of the same size. Immediately over the boiler room are the coal bunkers, and these have a capacity of 7,000 tons; coal is brought up alongside the building on barges, when it is conveyed 110 feet to the top by a large gantry crane carrying an automatic scoop bucket holding 3,000 pounds. The coal is then automatically broken, cleansed, and weighed, when it is ready for the boilers, to which it is conveyed and fed by automatic stokers. In the engine room there are three Westinghouse-Parsons steam turbines, having a capacity of 5,500 kilowatts, while ample room is provided for increasing the number of units when the entire system is electrified. The turbines are direct connected to three-phase alternating-current generators, and these deliver the electrical energy to the transmission lines at 11,000 volts. From the high-tension lines the current is distributed to the sub-stations, of which there are five located at convenient places. The transmission cables are carried throughout the system in three different ways. They are either carried underground in conduits, or they are suspended on steel poles, while on other routes the distribution is by the third rail.

Starting at the power house, the high-voltage lines are laid in conduits, and by this means are taken underground through Long Island City until the yards of the railroad are reached, when they are permitted to emerge, and from this point on, north to south, that is to Woodhaven Junction and thence beyond to Beach Channel, they are strung overhead on latticed steel poles, as shown in the illustrations. At Woodhaven Junction there is located a sub-station, and from this point the transmission lines radiate to the east and west, running in the first instance to Flatbush Avenue terminal, and in the last to Dunton; in this case the cables are laid in conduits, as are those from Beach Channel to Hammel. The high-tension lines from Dunton to Belmont race track and from Rockaway Junction to Springfield Junction are suspended on steel poles, the latter wherever utilized being mounted on concrete foundations.

At the different sub-stations the high-voltage alternating current is converted into a direct current of 600 volts by static transformers and rotary converters. It will not be necessary to enter into the details of the sub-station equipments; suffice it to say that they represent the most advanced construction.

A novel feature of much importance is the introduction of portable sub-stations; each of these comprises a steel car of the usual design fitted with three static or alternating-current transformers and a 1,000-kilowatt rotary converter. These movable units have several uses, the principal ones being to augment the capacity of the stationary sub-stations, and to maintain the potential at any point where the traffic might become spasmodically heavy, as it often does at the different race tracks.

The railway equipment is of standard third-rail construction, the rolling stock being similar to and capable of being interchanged with those of existing elevated and subway lines, as well as the Pennsylvania surface and tunnel lines now under construction. Since the Long Island Railway is a third-rail system, and at the same time a surface road, it is obvious that the feeder rail must be well protected, so that pedestrians can not by any possible chance come in contact with it. The third rail is laid 27 inches from the gage line of the track to its center line, the top of the rail projecting 3.5 inches above the top of the track, this arrangement being standard with the roads previously mentioned. At given intervals sleepers extend beyond the track, and the rail is sustained in its position by vitrified clay insulators.

The rail is covered its entire length, except where it passes over grade crossings and in front of stations, by a wooden plank that is supported about 4 inches above it by wooden uprights that are placed outside the rail. At the crossings, but well within the line of protecting fences which inclose the entire right of way, the third rail terminates in a broad sloping shoe, the electrical connection being kept intact by a heavy insulated wire carried under the street or road, as the case may be, in a conduit, making connection with the third rail on either side.

At the present writing the rolling equipment consists of 150 motor cars, built entirely of steel, and these are operated in trains of five cars each. It is the intention of the officials, however, to make up the trains of motor and trail or ordinary cars, that is, a five-car train will have three motor cars and two trail cars, while an eight-car train will consist of five motor cars and three trail cars. All the cars are provided with the pneumatic multiple unit system of control, and each car is fitted with two motors of 200 horse-power each, both the latter being placed on one of the trucks, while the other and opposite truck is motorless. The steel motor cars were designed by Mr. George Gibbs, chief engineer of Electric Traction for the Pennsylvania, New York and Long Island railroads.

Since the cars were designed to be interchangeable with those of Manhattan subway and other New York and Brooklyn roads, and were yet required to run on the surface over the Long Island route, it was necessary to provide a special combination platform that would be flush with the floor of the car as in the subway, and to enter or alight at rail level, as over the route for which they are primarily intended. Each of the motor cars weighs 83,000 pounds, and can easily maintain a speed of 55 miles per hour if required, or at the rate of 25 miles per hour they can keep a schedule which includes stops of 1.6 miles apart.

Provision has been made by which the current is cut off and the air brakes applied the instant the motorman's hand is removed from the controller, and this device is an important safety factor, for should illness or death overtake him while in charge of a train, it would simply stop. To keep the heart of the railroad, that is, the power house, in constant touch with all its various ramifications, an elaborate system of telephony has been installed; the telephones are similar in design to those employed by the police of New York, and boxes are located at intervals of 2,000 feet along the line. Besides these precautions against accident, a comprehensive installation of the most efficient type of block signals has been put in. To facilitate the work of inspecting the railway and its various subsidiary appliances, two gasoline track automobiles are used; these are capable of carrying four men, together with all necessary tools and supplies. They are powerful enough to make 30 miles per hour, and light enough to be lifted from the track by two men.

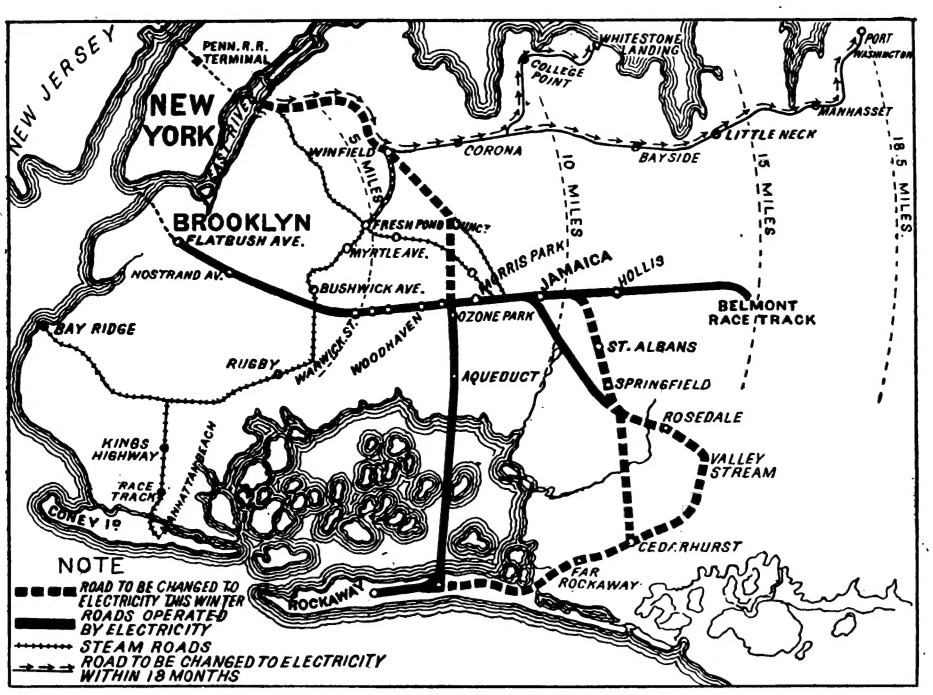

MAP SHOWING THE ELECTRIFIED LINES OF THE LONG ISLAND RAILROAD.

To meet the effects of sea-water on cast-iron piles, and for other reasons, it is a common and good practice to make the lower lengths of greater thickness—say, ⅜ inch more—than that sufficient for the upper. Occasionally, also, the bottom lengths are filled with concrete, which no doubt adds to the length of time during which they may be relied upon.

Motor Cars in Hungary.

So far, the trade in motor cars has not acquired any great degree of development in Hungary, although within quite recent dates a marked upward movement has been noted. Hungarian industry is still too immature to enable it to supply the public with cars that would in any way be capable of competing with foreign builds. Recently a cart and wagon factory at Gyor opened an automobile section, and is reported to have made an arrangement with a large French firm for the supply of all the necessary parts. In addition to this, Mr. Rokk Gstvan, an important Hungarian industrial, has recently secured an order for the supply of light cars to the Hungarian postal authorities. Be this as it may, many years will still have to elapse ere the means (tools, plant, etc.) at the disposal of national industry will be such as to admit of the inauguration of a "motor car industry" worthy of the name.

Hitherto, French cars have been most used by the Hungarian public; this is due to the fact that the leading firms (Peugeot, Delaunay-Belleville, Dietrich, Panhard-Levassor, Darracq, Bayard-Clément, and Dion-Bouton) are all well represented at Budapest.

England, Austria, Germany, Italy, and America, are also making great endeavors to create a market in Hungary for their cars. An Italian (Turin) firm has lately succeeded in placing some of its builds, while Germany is doing fairly well with Mercedes cars, due to the push and energy of the firm's representative at Budapest, viz., Mr. Arnold Spitz, who has also a branch at Vienna. Smart advertising in trade papers has had much to do with the popularity of the German Mercedes cars.

A motor exhibition was held at Budapest last month, and exhibits were made by the following firms: French, Dion-Bouton; German, Appel-Darracq; and American, Oldsmobile. Altogether eighty-eight cars were shown, and thirty-seven of these were sold. In spite of the bad weather which prevailed the total of paying visitors amounted to 40,000 persons, and there were many others who had press, advertising, and other free tickets; from this it will be seen that the Hungarian public is taking much interest in up-to-date means of locomotion. The bad state of the roads is one great drawback to motoring in Hungary, but that can easily be overcome. All those who are wise will keep their eyes on this market; judicious advertising in papers devoted to cars that find their way to Hungary, would bring the enterprising speculator just as good results as have been secured by Mr. Spitz and other smart men who don't mind spending a few dollars.

Neuchatel Steam Turbine Plant.

Neuchatel is an example of a large town having a combined steam and hydraulic plant for delivering current. The hydraulic station at Pré aux Clées became overcharged, and as no more power could be had from the river, it was decided to erect a steam plant in the city, on the border of the lake. After considering the question of gas engines, it was finally decided to employ steam turbines. The boilers are of the water-tube pattern, coming from the Guillaume Works at Neustadt, and provided with superheaters. The boilers have 250 square yards heating surface and the superheaters 70 square yards, the latter being placed under the steam dome. A system of gates allows the flame to pass through the superheaters, or simply through the tubes. Brown-Boveri steam turbines of the well-known Swiss make are used here. The first one which has been installed has some 300 horse-power and makes about 3,000 revolutions per minute. The speed can be varied ten per cent on each side. The dynamo is mounted upon the same base and is direct-coupled to the turbine. It is of very compact shape, carrying two field coils. The condenser pump is worked by an independent electric motor. The steam turbine can be started and set running inside of ten minutes. As to the steam consumption, it is estimated at twenty-five pounds of steam, dry and saturated at eleven atmospheres per kilowatt at full load. The Neuchatel station also contains the dynamos which receive the current from the hydraulic plant at 3,800 volts and transform it to low tension current for the tramway lines.

Blowing wells, sometimes known as breathing wells, are now being investigated by the United States Geological Survey. The best-known examples of this type of well are found throughout Nebraska. The force of the air current in one of the Louisiana wells is sufficient to keep a man's hat suspended above it. The cause of such phenomena is mainly due to changes in atmospheric pressure.

THE VISITING BRITISH FLEET.

(*Continued from page 396.*)

COMPARISON OF ARMORED CRUISERS.

	Drake.	Pennsylvania.	Berwick.	Charleston.
Length.....	500 ft.	502 ft.	440 ft.	423 ft.
Beam.....	71 ft.	70 ft.	66 ft.	65½ ft.
Draft.....	26 ft.	26½ ft.	24½ ft.	23¾ ft.
Displacem't.	14,100 tons	13,400 tons	9800 tons	9700 tons
Horsepower	31,450	27,750	22,680	21,000
Speed.....	24.1 knots	22.4 knots	23.6 knots	21.5 knots
Coal.....	2500 tons	2000 tons	1600 tons	1500 tons
Belt.....	6 to 3 ins.	6 to 3½ ins.	4 to 2 ins.	4-in. partial
Gun position	6 to 5 ins.	6½ to 5 ins.	5 to 4 ins.	4 ins.
Total weight of armor..	2700 tons	2219 tons	1800 tons	854 tons
Guns.....	2 9.2-in. 16 6-in. 15 small	8 8-in. 14 6-in. 46 small	14 6-in. 10 3-in. 8 small	14 6-in. 18 3-in. 34 small
Torpedo tu's	2 submerged	2 submerged	2 submerged	
Complement	900	882	678	564

and draft 24½ feet, the displacement being 9,800 tons. She carries a belt which extends from the bow to the wake of the after barbette, and ranges in thickness from 2 inches to 4 inches. Her armored deck is 2 inches thick, and she has 4 inches of side plating on the lower deck amidships, which decreases to 2 inches at the bow. The armament of fourteen 6-inch guns is carried in two two-gun turrets, one forward and one aft, and in ten armored casemates. These vessels have all easily maintained 23 knots an hour on trial, and they carry a good coal supply. As compared with our own "Charleston," they are better protected, carrying about 1,800 tons of armor as against 850 tons, and they have a higher speed by about a knot and a half. The armament in both cases is about the same, but in each case it is not as powerful as it should have been, the Japanese armored cruisers like the "Asama," of the same displacement, carrying four 8-inch guns and fourteen 6-inch, being greatly superior in gun power. The British have remedied this weakness in the six later ships of the "Devonshire" class, by mounting an armament of four 7.5-inch guns and six 6-inch guns, besides increasing the protection at the water line from four to six inches.

Analysis of Fertilizers.

The methods recommended by the International Commission are similar to those in use for the determination of phosphoric acid and potash. According to the Zeitschrift für Angewandte Chemie, the commission proposes for nitrogen the Kjedahl-Jodlbacier or Schloesing-Grandear methods as to nitrates; the distillation with magnesia for ammonia, and the Jodlbacier process for total nitrogen in presence of nitrates, and for organic nitrogen in the absence of nitrates. In the latter case the operation may be also conducted by combustion with soda lime. Fodder is to be cut up, broken, sifted, and the following determinations made: Water: Desiccation at 100 deg. C. during three hours for 5 grammes. Crude protein: The percentage in nitrogen is to be multiplied by 6.25, the Kjedahl method. Assimilable nitrogenized principles: The method of Kuhn is to be applied; the gastric juice may be replaced with commercial pepsin. Fats: Exhaustion of 3 grammes of dried matter at 95 deg. C. in the stove by means of ether, and weight of the residue after evaporation of the solvent. When the operation is on the seed-cakes of siccative oils, the desiccation is to take place in a current of hydrogen or of lighting gas. In case molasses is present, it is necessary to first exhaust the water, then dry, and finally estimate the fat. Extractive nitrogenized principles: These are to be estimated by difference. Ligneous principles: Three grammes of substance free from grease are to be boiled successively with 200 cubic centimeters of sulphuric acid (1.25 per cent) and 200 cubic centimeters soda lye (1.25 per cent). Each boiling, continued for half an hour, is to be followed by washing with boiling water. Ash: Five grammes of matter are to be incinerated, the ash analyzed, with a determination of the silica, if the percentage appears abnormal.

The Current Supplement.

The current SUPPLEMENT, No. 1559, opens with an article on the peat industry of the United States by A. Frederick Collins. Charles H. Stevenson writes on otter furs. A most thorough discussion of modern turbine pumps is presented. The paper on the perception of the force of gravity by plants is concluded. J. H. Morrison presents another installment of his historical review of the iron and steel hull steam vessels of the United States, selecting as his subject steel shipbuilding. One of the most notable papers read before the South African meeting of the British Association for the Advancement of Science was a paper by Prof. W. E. Ayrton on the distribution of power. This is abstracted in the current SUPPLEMENT. A. Rigaut presents a lucid explanation of Catalysis. **The stature of man at various epochs is considered by A. Dastre in a thoughtful article.**

Correspondence.

A Letter from the Inventor of the Hargrave Kite.

To the Editor of the SCIENTIFIC AMERICAN:

The untiring efforts of Prof. Langley and his staff in their work on the flying machine cannot be overestimated. No doubt every scrap of experience is safe in the archives of the Smithsonian Institution.

The difficulties encountered are in no way exaggerated, and must steel the hearts of those who can foresee the results that shall certainly ensue.

Plank the dollars, and wire in again while the men are around who helped to amass our present stock of knowledge.

Do not worry and be jealous about what particular spot on the globe the first machine jumps off. Japan or the Argentine is just as likely as Washington, D. C. LAW. HARGRAVE.

Woollahra Point, Sydney, N. S. W., September 29, 1905.

A Teacher of Physics on "Teaching Physics."

To the Editor of the SCIENTIFIC AMERICAN:

In reply to Mr. Perkins's article on teaching physics, printed in your issue of October 21, I should like to speak on behalf of the pupils and the teachers.

Mr. Perkins says that he "set an examination in physics based upon a well-known college textbook, with questions of a fundamental character, and no more difficult than those asked of freshmen who have completed the first year's college course," and that the results were most discouraging. I infer from the article that these questions were for pupils who had taken physics in our ordinary secondary schools. If so, why should the questions be based upon a college textbook when such pupils have studied only high-school textbooks? And why should they be such as are asked of freshmen, when the average high-school pupil is two years younger? A number of the subjects mentioned, such as angular velocity, susceptibility, and diffraction gratings, are ordinarily not taught at all to high-school pupils, and are not even mentioned in many of the textbooks used; while, for good reasons, many of the other subjects are merely glanced at in passing. At the same time, physics is ordinarily taught in the third year in the high schools, and the difference between a pupil ready for the fourth year in the high school and one ready for the second year in college depends not only upon the two years difference in age and maturity, but upon the fact that the college pupil has had two years more of vigorous school training; that one of those years has been perhaps his most ambitious year, the freshman year in college; that he has been thrown among older persons instead of younger; and that physics has occupied one-third of his attention instead of one-fourth, as in the high school. Furthermore, the freshman taking his closing examination is among familiar surroundings, is usually answering questions set by one who has been his instructor in the subject, and he has just finished the course; while the applicant for college admission is among strangers, under distracting influences, the style of the questions may be unfamiliar, the subjects emphasized may have been slighted by his own teacher, and his course was finished over a year before.

It may be said that the teacher is at fault, at least in not presenting all the subjects mentioned, or in presenting them poorly. I am of the opinion that neither the average pupil nor the average teacher is at fault; but that the fault, if there is one, lies in expecting more than nature is ready to give. And I am also of the opinion that to demand more than nature is ready to give is more grievous than to demand less; the injury is fully as great and the expense is far greater. For some years I have had occasion to read and mark thousands of physics examination papers, written as a rule by pupils at the end of their physics courses, from high schools, parochial schools, and preparatory schools. I have written the questions myself, and have varied them not only to suit the general needs, but as well to test various phases of physics teaching; and have also continuously tested my own pupils, not only as classes but as individuals. From all this the conclusion has been persistently forced upon me that the average teacher asks too much of his pupils in physics; attempts to cover too many subjects or to pursue them too deeply. There is scarcely a subject mentioned in Mr. Perkins's article upon which I should expect in these examinations to get an entirely satisfactory discussion. Can it be that these thousands of pupils and the twoscore or more of teachers are all inefficient? Many of the subjects mentioned are fundamental, yet they are abstruse and beyond the clear conception of the pupils, and have little practical value. The opinion is slowly gaining that it is better to teach that potatoes in boiling water will not cook quicker by turning on more gas than to teach the exact meaning of moment of inertia. **The one sticks, and is used through life; the other is evanescent, and is used only by the specialist.**

As to the charge of incompetency, I think we must all plead guilty. Not because we have devoted less time or energy to preparation than the Latin teacher has; but because the subject demands more preparation both before and while teaching. The theoretical side of the subject is as broad as Latin, and is constantly changing, while Latin is at rest. At the same time the practical side requires the training of a machinist, a tinsmith, and an electrician, if no others. A thoroughly competent physics teacher should be able to do work in any of these lines as well as the most competent tradesman, because his work is constantly under the inspection of his pupils. For these reasons we are incompetent. If I were to select a year's work to aid me most in teaching, it would be at some trade, although I have had an aggregate of four or five years of practical work as a machinist, a tinsmith, a stationary engineer, an electrical engineer, and a blacksmith.

But, though in this sense incompetent, yet I think the average teacher of physics gives more for his salary than the average man in other professions or trades, not only because of the preparation required, but because of the work actually performed. In Chicago the physics teacher receives about the same pay as the stone mason. I have worked in armature winding departments where some of the winders received more than I have ever earned as a teacher, although they had no technical knowledge whatever, and I found the work much less tiresome than teaching. That greater competency should not be expected of the ordinary physics teacher under present conditions is shown by the fact that many of them can and do receive more pay at other work for which they are not so well equipped. For some years before teaching I earned more than I ever expect to earn as a teacher, and that at work which, while it is of great value to me as a teacher, yet required no college training, and at work to which I could return at any time.

Therefore, on behalf of the teachers as well as the pupils, to the indictment as a whole I plead not guilty.

So far as the school authorities are concerned, I cannot speak from experience; I can only surmise, as a college teacher can only surmise in reference to the conditions of high-school teaching. Without venturing an opinion as to whether the fault lies with the school officials or with the people behind them, I feel that improvement would result if teachers were placed upon a merit system, and not a time-serving system, as fully as in commercial corporations, without a maximum salary limit; so that there would be tangible inducement for constant exertion and for remaining in the ranks. And this should extend to a consideration of work done outside of schools and colleges. Again referring to myself (for I feel that one's own experience is about all that is of value in such a discussion as this) the work which I have done on the farm, in stores, offices, and courts of law, has been fully as valuable to me as a teacher of physics as the work which I have done in schools and colleges. Other things being equal, one who has spent his life within the walls of schools and colleges as pupil and teacher is surely not as competent to train children to fight the battles of life as he who carries the scars of the warfare.

Finally, I do not think that "a disproportionate stress is put on the laboratory end." The mere fact that the average pupil pursues three other studies which are book studies only is sufficient warrant for homeopathic doses of such study in physics. But, if space would permit, there are many reasons which might be mentioned why laboratory work should not be lessened, even though the apparatus, the conditions, or the teacher may not be perfect.

E. J. ANDREWS,
Teacher of Physics, Waller High School.
Chicago, Ill., October 21, 1905.

A New Safety Lamp.

A new form of safety incandescent lamp for use in mines has been devised by M. Tommasi. It is intended to be used in mines where fire-damp occurs, also in powder works and localities which contain inflammable dust. Incandescent lamps do not always give a complete security in such cases. When the globe breaks, the filament burns in the air and may throw off glowing particles and also cause sparks which are sufficient to give an explosion. The new lamp avoids all contact of the filament with the air. The incandescent lamp is inclosed in a glass cylinder. The lower part of the cylinder is closed by the lamp-socket, while the upper part has a cap which contains a small stop-cock. The lamp-socket contains a small bellows which when filled out, causes two contacts to press together. The filling is done by blowing through the stop-cock from a rubber ball. Should the cylinder break, the air escapes and the bellows contracts, breaking the electric contact. When the lamp alone breaks, the partial vacuum produced within the cylinder also causes the bellows to collapse. In either case the current is cut off from the lamp and no damage can be done.

A VISIT TO THE VOLCANO POAS.

BY ALBERT RUDIN.

About twenty-five miles to the northwest of the city of San José, the capital of Costa Rica, is the remarkable volcano of Poas. This is one of the numerous volcanic mountains of the Central Chain, and while not the highest among them, is beyond question one of the most interesting, picturesque, and easily accessible. The degree of activity of the volcano varies from time to time, but since last April the frequency and violence of the eruptions have largely increased, and numbers of them have been clearly observed in San José. Although the writer had visited Poas on several previous occasions, the recent extreme activity of the mountain induced him to make the expedition upon which the accompanying photographs were taken.

The journey, starting from Alajuela, can be made on foot or on horseback. While the first method is much the better thoroughly to enjoy the trip, it will be found very trying to those unaccustomed to long jaunts of this character, as the way is neither short nor easy. In fact, it takes about ten hours to climb the mountain. For several hours the path to the crater leads through cultivated fields, and when the end of these is reached a further journey of about an hour and a half through a forest brings the traveler to the *potrero*, a large clearing in a hollow, 8,160 feet above sea level. This is in all probability an old crater, which in the course of time has gradually become filled in. A small stream of water possessing a slightly sulphurous taste issues from a chain of ponds and takes a course to the south through the forest. The quantity of sulphur in the water, which is quite harmless as a beverage, is not too great for the existence of animal life, and a species of small toad is often found in it.

After crossing the *potrero* toward the north, the road traverses a second section of the forest. In this the humidity is excessive and constant the year around, and it contains a great number of muddy pools from which a considerable quantity of sulphureted hydrogen gas (H_2S) is constantly rising. It is a peculiar fact that the presence of this gas is limited exclusively to the described locality, and at no other place, not even in the crater itself, has its unmistakable odor been noted. At an altitude of 8,360 feet, a second *potrero* is crossed, and this is succeeded by a short ascent through underbrush. At the end of this short, comparatively open climb, the traveler suddenly and quite unexpectedly reaches the lip of the crater, and with an indefinable sensation of awe and wonder finds himself at the very brink of a vast perpendicular-sided pit of seemingly recent origin, at the bottom of which lies a motionless pool of yellowish water. The sense of deadly stillness and desolation is undisturbed by any indication of life. The almost vertical walls are devoid of even a vestige of plant creation; not a bird wings its way through the air; the surface of the pool is without a ripple, and even the human voice sounds strange and incongruous. Suddenly the silence is broken by a great and startling underground rumbling, and a huge column of a dark-colored liquid is thrown to a vast height from a spot near the center of the lake. The column ordinarily rises to a height varying from 250 to 500 feet. Almost instantly a vast cloud of vapor is evolved which surrounds the column and rises to an immense height.

The crater, which is conical in form, has an extreme altitude of 8,500 feet above sea level. Its upper diameter is about 3,200 feet, and its depth about 1,000, while the diameter of the lake approximates 1,600. From time to time small columns of vapor curl upward from various points of its surface, and sometimes the frequency of these is so great that the entire lake resembles a boiling caldron. The walls of the crater are less steep at the south side, the point at which the traveler has approached it, and only from here is the descent to the bottom possible. Even from this point the undertaking is difficult and even hazardous, and should not be attempted without a guide. By a strange optical illusion, the distance to the lake from the rim of the crater appears vastly less than it in reality is, and a full hour of fairly rapid scrambling is required to make the descent. The scarcely defined path is at times dangerous, running around boulders and along overhanging precipices, and frequently offering the poorest kind of foothold because of its covering of loose and slippery volcanic ash. About half way down is the "*juro del macho*," a small stream of delicious sweet water.

When the bottom is attained the traveler will find it to his advantage to move about with the exercise of considerable care because of numerous concealed holes filled with a slimy substance, consisting mainly of sulphate of lime with a large excess of sulphuric acid. This hardens in a few moments when exposed to the air, and consequently the pits are covered with a slight shell that renders it almost impossible to distinguish between them and solid ground. If a foot goes through this thin crust, aside from the resulting inconvenience at the moment, it will be found that in a few days the shoe will be destroyed, as the seams cannot resist the acid action.

The lake at closer view is found to be covered with clouds of vapor and it is impossible to see for any distance. Among other gases, sulphur dioxide (SO_2) is present in considerable quantities, and at times the smell becomes almost unbearable. Sulphur is found in numbers of places and the "sand" of the beach is composed almost entirely of rounded bits of this substance. At close range the water is grayish in color, and it is so acid that it almost burns the tongue when tasted. Any dark cloth moistened with the liquid instantly becomes red, and is ultimately destroyed. Chemical analysis of the water reveals large percentages of sulphurous and sulphuric acids, sulphate of lime, and other substances, and it contains besides a considerable deposit of volcanic ash. The temperature at the shore, while varying considerably, ranges around 115 deg. F. During his last visit the writer witnessed some of the largest eruptions ever recorded. During one of these the tremendous column of dark liquid rose to an estimated height of 2,000 feet, and was about 300 feet in diameter. The waves produced on the lake by such an outburst are formidable, and long after the eruption has ceased the roar as they break against the rocky sides of the crater is plainly heard from the edge above. Provided care is taken to select a spot beyond reach of the incoming waves, there is little danger in viewing an eruption from below, and the sight is one that the observer, thrilled with fear and excitement, will never forget.

The eruptions do not succeed one another at regular intervals. Sometimes the outburst does not take place for several hours, while at others as many as three or four will occur within an hour. To the writer it appears that the more violent eruptions take place in the early morning, even before sunrise, and that the intensity of the convulsion decreases as the day advances. There is a popular belief that any unusual noise produced in the vicinity of the crater will cause an eruption, but tests with the combined voices of a number of persons, and the discharge of firearms, carried out by the writer's party, usually proved futile.

Considerable difference of opinion has arisen as to the manner in which the volcanic ashes which sometimes fall on the surrounding cone are thrown from the crater. Various observers believe that there are openings on the east side of the giant pit, and that the ashes are ejected from these. On the last expedition, the writer's party observed a fall of ash after every large eruption, and this seemed to come directly from the puff of steam or vapor. A possible explanation is that a large quantity of the water comes out during an eruption at a temperature much above the boiling point, evaporates, and leaves dry the ashes which it contained, to be scattered by the wind.

At a distance of some hundreds of yards from the edge of the crater, and separated from it by a small elevation, is found a natural curiosity in the shape of a most charming little blue lake which, with its luxuriantly green shores, presents a remarkable contrast to the scene of desolation the observer has just left. This lake, 8,600 feet above sea level, is about 1,200 feet in diameter.

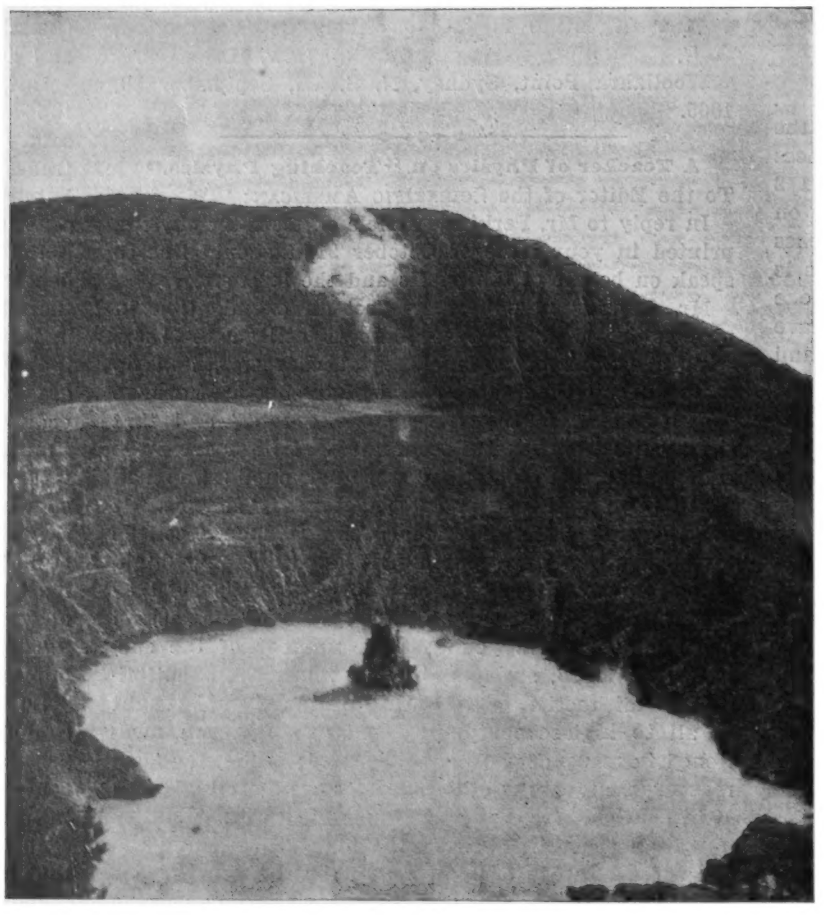

The Column of Black Liquid Begins to Make Its Way Upward.

The Rise of the Vapor Which Accompanies the Column.

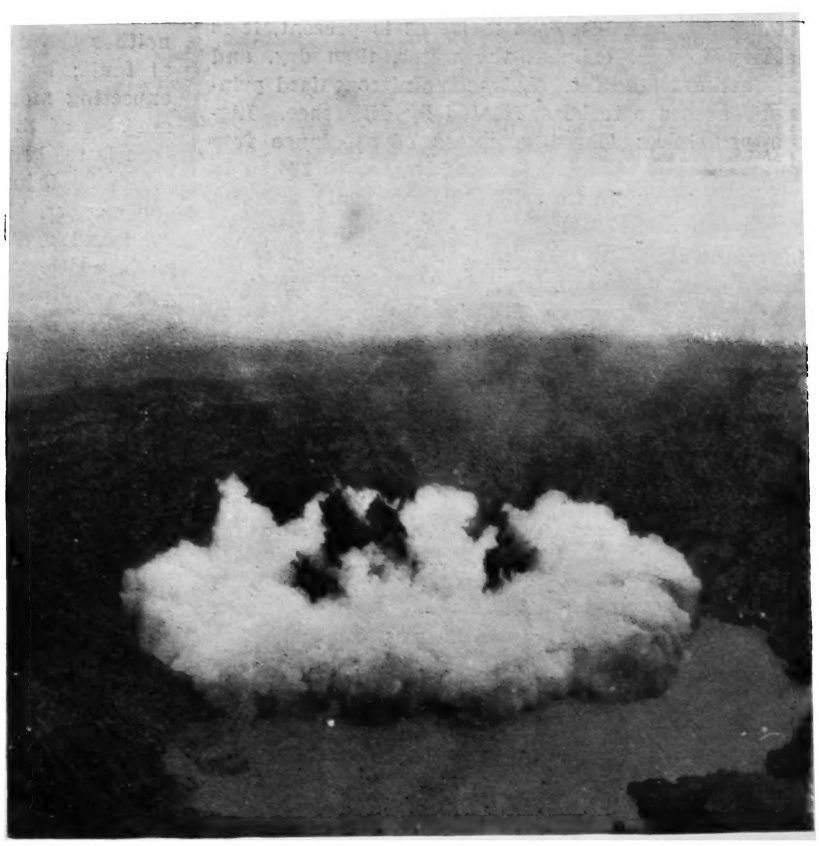

A Curious Form of Eruption.

AN AUTOMOBILE ECONOMY TEST.

In order to give a demonstration of the efficiency of the American gasoline automobile, the New York Motor Club recently carried out an economy test, which, although having only nine competitors, was nevertheless a successful affair and put all the machines that took part to an excellent long-distance test. The first two days of the week were given up to a trip to Philadelphia and return—a total distance of 204 miles; Wednesday and Thursday the cars went to Albany and back—a distance of about 320 miles; and the last two days of the week, 200 miles more to Southampton, L. I., and return.

The competing cars, although few in number, consisted of distinctively American types. There were two low-priced runabouts, both originally the outcome of one man's inventive genius—the Reo and the Oldsmobile. The former, which is the latest design for a single-cylinder light car, had the box behind the individual front seats arranged to open and form a second seat facing forward and capable of carrying two more persons. The latter, of the well-known curved-dash type, with tiller steer, carried only two, although sufficient ballast was taken along to make up for two more people, who could have been carried on the dos-a-dos seat. In the run to Southampton this car also picked up and carried for eight miles a member of the editorial staff of this journal and his bicycle, which had a punctured tire. This was an additional weight of 154 pounds, while 150 pounds was allowed for each passenger.

It will be well to state here that the results of the test were figured on the total cost per passenger in comparison with the railroad fare, and that definite charges were made for oil, gasoline, tire, and all other repairs, said charges being in excess, if anything, of current prices. Gasoline, for example, was charged for at the rate of 25 cents per gallon, whereas 20 cents is the regular price in the East at all garages. The railroad fare charged was for a total mileage of 660, while the machines actually covered over 725 miles.

Continuing the mention of the other cars in the test, which, with one exception, were all touring cars, these were as follows: A Wayne two-cylinder touring car; three Compound three-cylinder touring cars; Marmon and Frayer-Miller four-cylinder, air-cooled touring cars; and a Reo ten-passenger bus, which was simply the standard 16-horse-power two-cylinder Reo touring car chassis, geared to 25 miles an hour instead of 35, and fitted with an open bus body. The performance of this machine, which has a horizontal double-opposed engine of 4¾ inches bore by 6 inches stroke, was remarkable; for not only did it spin along at an average speed of 20 miles an hour on the good roads, but it also climbed some very steep and sandy pitches on the river road 10 miles below Albany, without shedding any of its passengers. The total weight of bus and load was over a ton and a half. This mass propelled itself to and from Albany with a gasoline consumption of only 12 gallons each way, or at an actual fuel cost of 1½ cents a mile. With all charges included, the total cost of running it 682 miles was found to be $29.30, or $2.93 per passenger. The Reo runabout was second with a total cost of $13.54, or $3.38½ per passenger. One of the three-cylinder Compound cars was third (the third cylinder of this car is a low-pressure one and receives the exhaust of the other two) with a total cost of $18.62 and a cost per passenger of $3.72½. The remaining four cars to complete the test were charged as follows for the total distance: Wayne, $19.815 total, $3.963 per passenger; Oldsmobile, $15.86 total, $3.965 per passenger; Compound, $17.185 total, $4.296 per passenger; and Marmon, $22.915 total, $4.583 per passenger.

The Frayer-Miller car, which has a novel air-cooled system consisting of air jackets and a powerful blower, had the misfortune to strip its gears when leaving New York on the trip to Albany. It lost two days as a consequence, and was out of the test, though it made the last two runs satisfactorily. Its showing, both before and after the accident, was one of the best. Representatives of the SCIENTIFIC AMERICAN rode on this car the first and the last two days of the test, and they found the car to be both fast and reliable, while the motor showed no signs of overheating, and ran as perfectly as any water-cooled motor. This and the Marmon engine, the cylinders of which are 4 x 4 inches, were the sole representatives of the air-cooled type, and they demonstrated well the feasibility of cooling a four-cylinder touring-car motor of 24 horse-power entirely by air. Another fact worthy of notice is that the four-cylinder, air-cooled Marmon used only $1.40 worth of oil, while the three- and two-cylinder, water-cooled cars used $2.12 and $2.10 worth respectively. The Frayer-Miller engine used very little oil, also. Both these cars are fitted with mechanical lubricators. The engines are shown in the accompanying illustrations. On the other hand, while the air-cooled motor is theoretically more economical of fuel, the two entered in this test did not show superiority in this respect, as they averaged only about 16 and 11½ miles per gallon respectively. The Reo runabout made quite the best showing as it averaged 21 miles per gallon. With this small car a careful driver should easily average 20 miles to the gallon of gasoline when the car is fully loaded. Less than half a gallon of lubricating oil was used by this machine throughout the entire run. The approximate running cost (gasoline and oil) per ton-mile was, for the runabout, $0.016, and for the omnibus, $0.019. The only breakdowns were the stripping of the gears and breaking of an axle on one of the Compounds, the breaking of a spring on another, and the ditching of one of them due to turning out for a team and the failure of the brakes to hold. These, with the accident to the Frayer-Miller car, were the only breakdowns of any consequence in a 725-mile run, which certainly speaks well for the reliability of the American car over good, bad, and indifferent roads. The trip to Albany was the longest and hardest of the test, and some very trying stretches of road were traversed before it was reached.

The rules followed in conducting this test, although good in the main, will receive some minor changes which a practical test showed them to need.

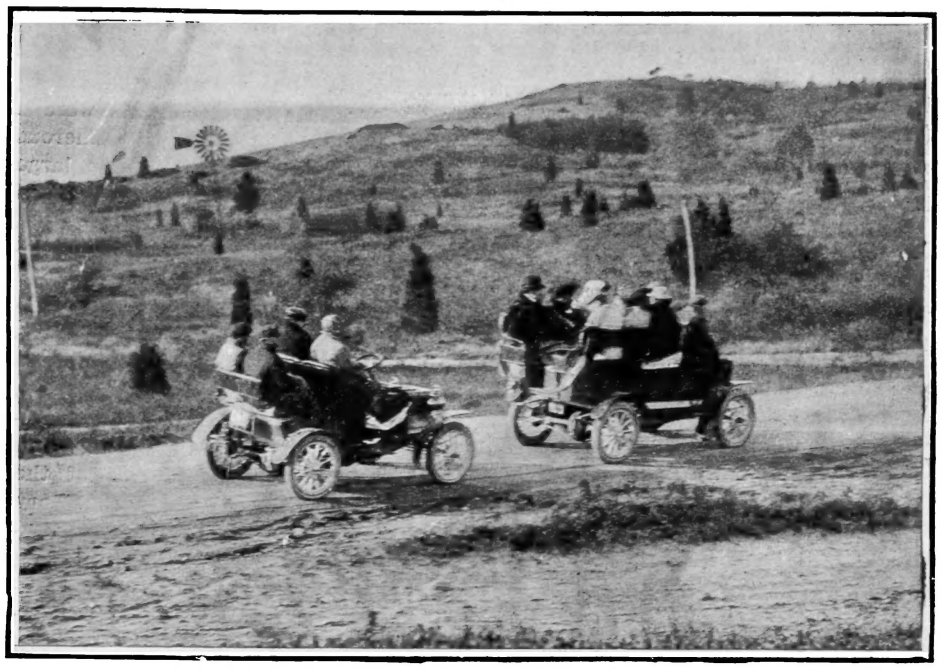

The Reo Bus and Runabout Among the Shinnecock Hills of Long Island.

The bus carried ten people and the runabout four. These machines were first and second respectively.

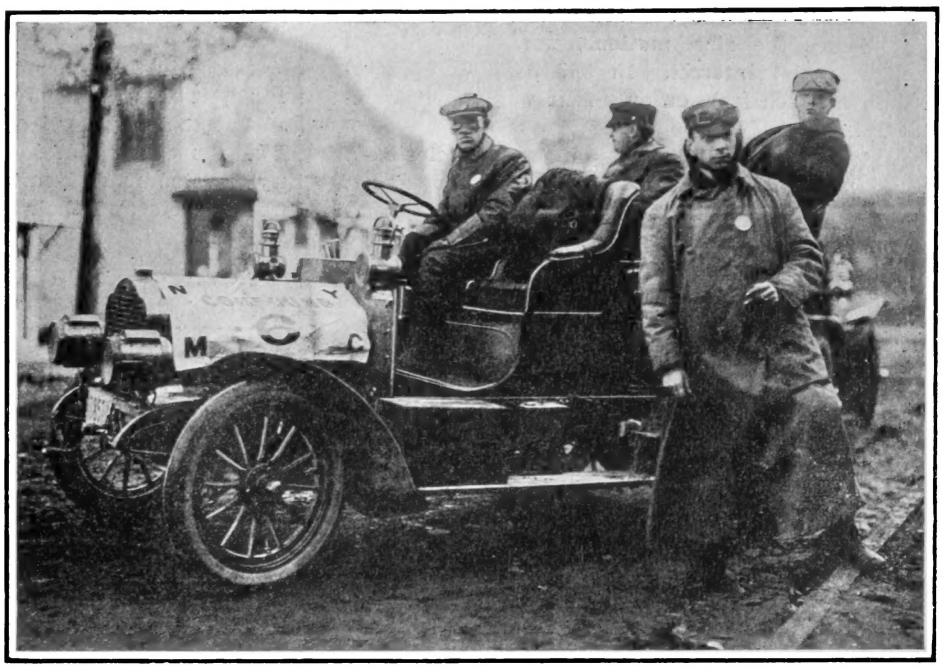

The 15-Horse-Power Compound Car Which Was Third.

This car has two 4 x 4 high-pressure cylinders and a third 7 x 4 low-pressure cylinder between them.

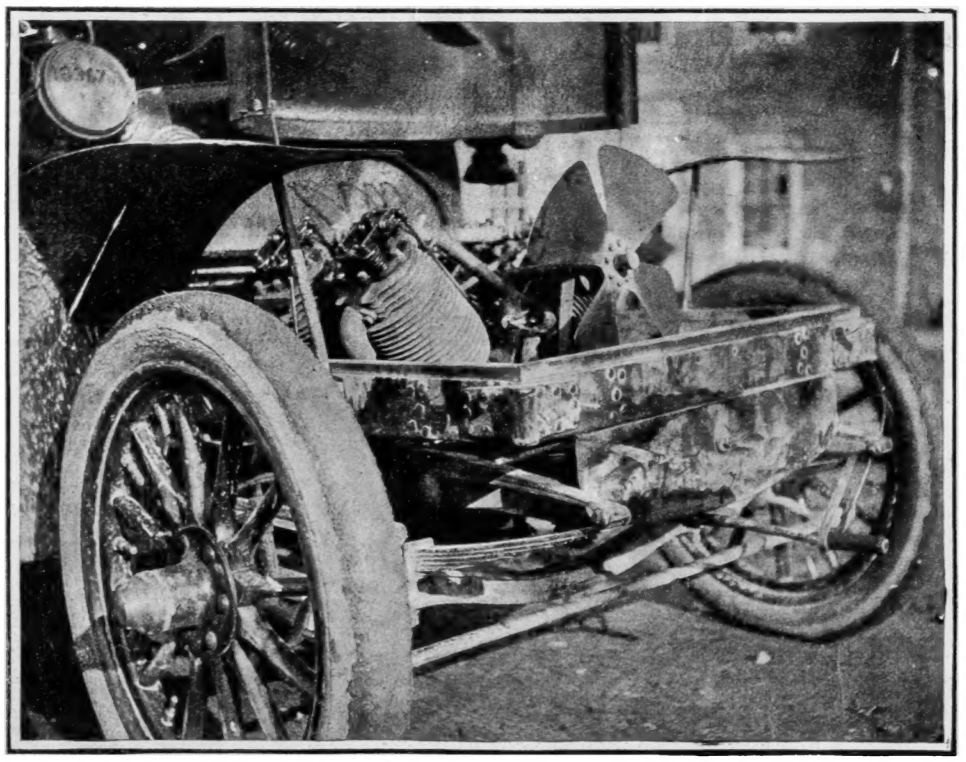

The 20-Horse-Power Air-Cooled Motor of the Marmon Car.

This engine has four 4 x 4 cylinders placed in pairs at an angle of 90 degrees.

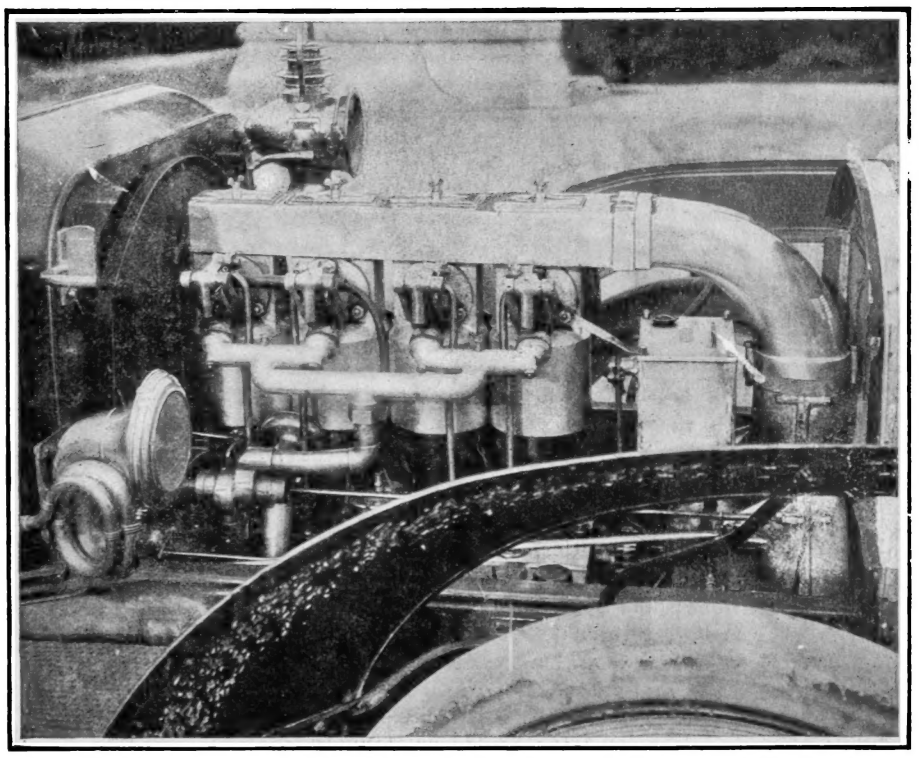

The 24-Horse-Power Air-Cooled Frayer-Miller Engine.

This engine has a blower in front for supplying a powerful air current to the aluminium air jackets. The cylinders are $4\frac{1}{16}$ x $5\frac{1}{8}$ inches.

THE WINNING AUTOMOBILES IN THE NEW YORK MOTOR CLUB'S ECONOMY TEST.

THE MAXIMUM OF THE PRESENT SOLAR CYCLE.

BY ROSE O'HALLORAN.

When last winter's sun shone forth between the rainclouds, it needed no magnifying power to discover that unwonted storms heaved its surface, and that the range of spottedness familiar to observers of recent solar cycles had been far surpassed. A dimmed area on December 8, a black streak in the middle of January, a rhomboidal discoloration in the beginning of February, an oval one in the end of that month, and another oval area in March, these were the successive signs of a sunspot maximum of unusual intensity. Two or three black markings distributed over as many years seem to be the amount of disturbance generally visible during maxima to the normal eye without magnifying power, but four giant spots within a period of two months is probably unparalleled in the memory of the present generation of observers.

The stage of departing minimum and approaching maximum ended with the appearance of the enormous spot of October 5, 1903, and though the succeeding fifteen months brought to view some large groups, they had not the size, motions, nor duration that challenge special interest. In 339 days of observation with a 4-inch lens, on only four was the disk unspotted.

A quadrangle of rapidly changing spots inclosing a tract of photospheric calmness, 70,000 miles across, extended from north heliographic latitude 10 to 20 deg. between the 7th and 16th of December, 1904. Too far apart to be classed as one group, they were suggestive of adjacent though separate causes. By the rotation of the sun on its axis, and meanwhile the motion of the earth in its orbit, each segment of the spot-zones is in view of the earth thirteen and a half days, and then unseen for an equal time; while our atmosphere, the inevitable night hours, solar vapors, and the effects of foreshortening also concur in hindering a prolonged view of the sun's features. Still, a coincidence as to time, position, and form often renders the identification of a disturbed area that has traversed the unseen side and come round again reasonably certain; but the quadrangular eruption had partly faded before it crossed the disk, and left no trace in the following rotation.

On the 2d, 3d, and 4th of January, 1905, the only group visible on the disk was a pair of enlarging spots in the southwest quadrant. The 5th of the month was cloudy, but on the 6th a small spot and several smaller companions were noticeable in the southeast quadrant. This was probably the first appearance of the stupendous eruption visible from January 28 to February 10. At the same time, the northeastern zones were also tracts of latent possibilities, though there was nothing unusual to indicate the fact. A curving line of four unpretentious spots appeared there on the 7th, and when near the west limb developed an oval section 14,000 miles in length which seems to have returned on February 4, and again, for the third time, as the giant spot of March. When the curving line of four spots had passed toward the center on January 10, another small group, also teeming with possibilities, was inside the northeast limb, and in two days included two spots 17,000 miles in length connected by a st ggling penumbral line. Before the 16th, this insignificant filament had become the main section of the enlarging group, which, like a long black streak one-seventh of the sun's diameter, was visible to the naked eye for several days. It extended 123,000 miles in north latitude 11 deg., and over the penumbral tracts, 30,000 miles wide in parts, ten umbræ were distributed. On the 19th, decrease was evident throughout, and the rapid central development, being especially transient, was reduced to one-half. The group was still visible on the 23d, but when due on the east limb on February 6, no allowance for unusual length or drift could, consistently with Carrington's law, identify it with any of the markings in the northeast quadrant of that date. On January 28, five days after its disappearance over the west limb, what was evidently another eruption of prodigious extent was well inside the southeast limb at 11 A. M., Pacific standard time. If the two were in existence during the previous five days on the invisible hemisphere they were not much more than a hundred degrees of the circumference apart. The newcomer was in south latitude 15 deg., and owing to width combined with length was found by measures taken at Greenwich to have no equal in dimensions during the last thirty-three years. In the foreshortened view of the 30th at 11 A. M. it was chiefly penumbral, rhomboidal in form, with two large umbræ divided by a slender photospheric streak. At the same hour on the following morning this bridge had changed direction nearly ninety degrees, the cyclonic tendency being shared by a small adjacent umbra. At this stage the disturbance seems to have had its greatest extent when allowance is made for the effect of foreshortening. Between clouds on February 2 and 3 it was distinctly visible without magnifying power, and on the 4th, when central in south latitude 15 deg. was more than 100,000 miles in length and 60,000 in width. The slender bridge was gone and the two vortical sections formed one oval umbra 18,000 miles in diameter, while numerous small umbræ were scattered round.

On the morning of the 5th an immense breach in a north-and-south direction had divided the western part of the penumbra, development or a greater velocity had noticeably advanced the lower part of the fragment and many changes were also evident in the minor umbræ. Notwithstanding the effects of foreshortening, a decrease in the size and in the number of the small nucleii, it was visible to the naked eye on the 6th, and telescopically until the 10th, when it passed from view. As Carrington in the middle of the last century devoted many years to a vigilant study of returning spots and their individual periods, his laws seem the best general index to latitudinal difference in solar rotation. Fifteen degrees from the equator, the mean position of this latter spot, is accredited with a rate somewhat less than twenty-five and a half days.

On January 28, 11 A. M., a screen image of the sun was arranged to measure one foot in diameter and the spot was then one-eighth of an inch inside the east limb. If centrally situated, this photospheric tract would be 9,000 miles across, but in the position of extreme foreshortening represented about half a day's journey. Allowing two days for the earth's advance onward, the spot was overdue on the morning of the 24th, as its size should have hastened a reappearance, but it was looked for in vain. Early on the 25th, a large spot was well inside the limb and, when less foreshortened, bore a general resemblance to the expected marking in its decline. It also proved to be in the same latitude, 15 deg. south. Flecks of seafoam sinking from crest to hollow of the rolling billows are not more elusive as to identity than these signals of solar disturbance. It may have been a new spot in an adjoining tract. If the same, it was no exemplar of Carrington's law. Though of lesser dimensions than during its supposed previous transit it was visible without magnifying power for several days when central on the disk, and was close to the west limb on March 10. Again in accordance with a rotation period of four weeks, and in the selfsame latitude, a spot was within the east limb on the morning of March 25. In one respect it was remarkable. Having enlarged to medium size, six small umbræ were formed, and in two days faded out, though what may be called pores became discernible in the same tract, while a triangular area of the adjoining surface on the eastern side assumed a dimmed aspect. Forty thousand miles in length and more than half that in width, it was too faint to be classed as penumbra, too distinct to be overlooked. When near the center of the disk it was oblong in form, and the disappearance of pores on the border and the development of minute spots throughout the area was an interesting stage of transition. As the formation of umbræ became more evident, the middle of the dimmed area cleared, leaving only a porous border, which soon was undiscernible in the general decrease and foreshortening that followed. These belated rotations, if such they were, end the history of one of the largest solar eruptions that have ever been measured, according to some estimates, surpassing all, even the historic spot of September, 1858. In April there was no marking in the same zones that could be classed as a fourth return.

Perhaps the strangest fact is that, in March, solar activity was far from being exhausted by the unusual displays of the previous months. On March 1, when marveling at the succession of sun scenes already presented, another portentous gap broke the symmetry of the eastern limb.

As before intimated, a small group occupied its place in January and again in February, while the periods of return were in good accordance with the law of Carrington for ten degrees of latitude. Extending between 8 to 16 deg. north from March 1 to 13, it measured 117,000 miles in length, and was in fact longer than the compact eruption of January 28, but, being somewhat cruciform, covered a smaller area. A simple method of comparing the areas when seemingly largest, indicated that it tinted about one-fourth less of the sun's surface. Its characteristics were a rather deep-hued penumbra sprinkled with numerous small umbræ, and the absence throughout of a large umbra. Seldom has such an interesting sun picture been presented as on March 4, when a previous great storm drifted westward toward decline while the incoming leviathan surged onward with foreshortened coils giving promise of vast length. Seemingly one-fourth of the disk apart, both were discernible without magnifying power.

When this later discoloration was past the center, decrease in tint and disintegration were noticeable, and as early as the 9th of the month only a fragmentary outline was there, which lingered until the 13th when close to the west limb. Survival in any form during another rotation is improbable, as the small group that came in toward the end of March was in a higher latitude. Of this notable series of sun spots, the second and the fourth were comparable with the largest on record.

In the subsequent three months, phenomena of the sun's surface equaled the average condition during ordinary maxima. A spot of medium size in south latitude 20 deg. indicated vortical motion in aspect, as well as by the changed position of its umbra from April 13 to 17; two good-sized groups transited in May; and on the 23d and 24th of that month the visible photosphere as seen in a 4-inch telescope was entirely unspotted. But the mysterious source of discoloration was not yet on the wane. After a month of moderate activity another series of leviathans came into view. The first was 96,000 miles in length, and when central a few degrees north of the equator, on June 26, 70 degrees of vortical motion was noticeable in its bridged umbra. The elongated group still discernible inside the west limb on July 1 was followed in five days by another 73,000 miles long. This latter would have been scarcely visible to the unaided eye but that a large umbra developed on July 8 and was perceptible on the south side of the disk for some days. When still central, a stupendous umbra encircled by a wide penumbra emerged into view at the east limb. This foremost section of an incoming group measured 45,000 miles across and was visible to the naked eye on July 13, three days before it was central. A serpentine appendage in the rear brought the entire length to 118,000 miles. It was eight degrees north of the equator and changed little in transit. A suggestive incident in its career as it neared the western limb was the outbreak of a spot about fourteen degrees behind it which, in the much foreshortened view, measured 62,000 miles. Such a repetition of activity in the rear is frequent, may be more than accidental, and would account for seemingly belated returns. Two rapidly changing groups between 30,000 and 40,000 miles in length were the chief features of the August sun; and widely scattered disturbances of lesser size in September indicated that subsidence of activity was slow and gradual.

A brief summary dating back to the beginning of October, 1903, when the intermediate stage from minimum to maximum was clearly passed, shows that activity has been pretty evenly distributed between the

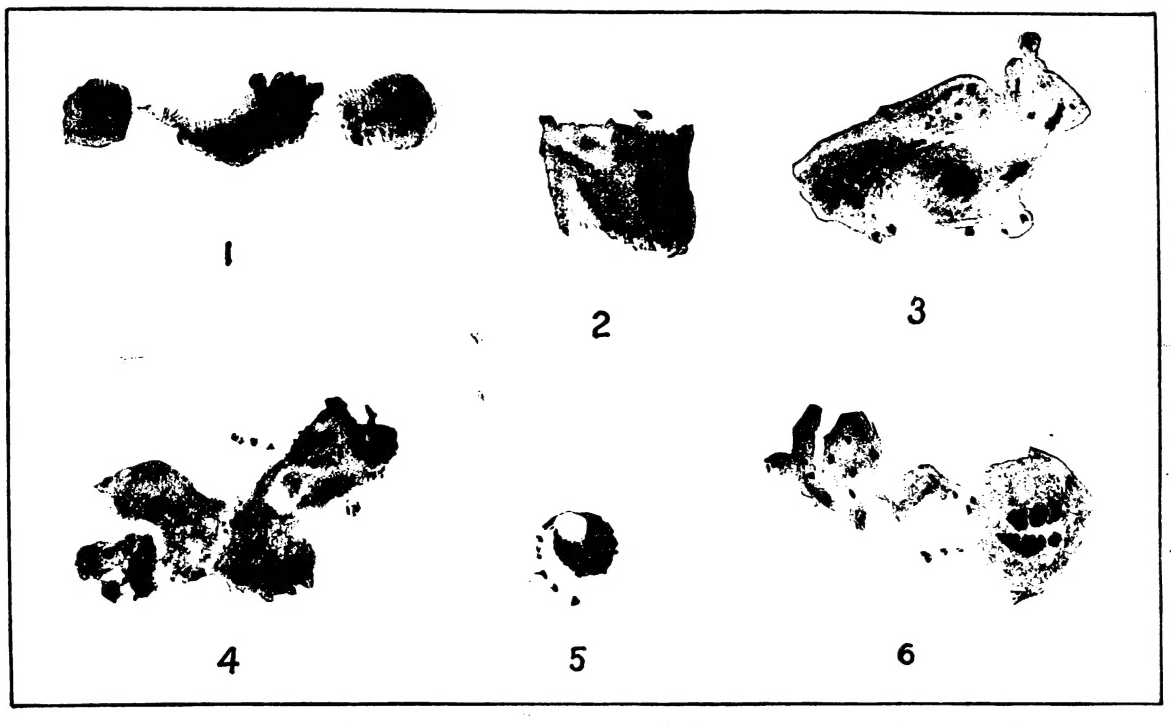

1. Sunspot of January 16, 1905, 10:40 A. M. 2. Sunspot of January 30, 1905. 11 A. M. 3. Sunspot of February 5, 1905, 9:40 A. M. 4. Sunspot of March 7, 1905, 9 A. M. 5. Cyclonic sunspot, April 17, 1905, 9:45 A. M. 6. Sunspot of July 15, 1905, noon.

SUNSPOT STUDIES.

northern and southern spot-zones in these two years. In deducing results the term "spot" is used to denote a discoloration whether single or in parts, provided the components are sufficiently near to indicate a common origin. As the largest eruptions are rarely spread beyond an area twenty degrees in diameter, a group scattered over that extent of surface is classed as one disturbance or spot. According to this classification, in 613 days when observations were obtainable, 263 spots appeared on the disk, 118 being in the northern hemisphere, 108 in the southern, while the positions of 37 were unascertained. On only six days was the disk unspotted in a four-inch lens. Of these 263 spots, 115 appeared from January 1 to September 30 of the present year (1905). This denotes an increase in the average number as well as in size during these tempestuous months. The proportion in the hemispheres was nearly preserved, 53 being north of the solar equator, 47 south, and 15 unlocated. As explained in the foregoing account, the northern tracts also had the larger share of the seven stupendous eruptions described. A comparison of those of lesser size—neither vast nor faint—shows that during this same critical period about 18 appeared north and 15 south of the equator, from latitudes 5 to 20 being the chief zones of activity.

When the great spot of October, 1903, heralded the beginning of maximum, widespread magnetic disturbance encompassed our globe, but it is a circumstance of much interest that during the past nine months, when tempest-tossed areas of still greater extent faced earthward again and again, neither auroras nor electrical phenomena were in notable co-operation with this climax of maximum spottedness.

CAPTIVE HIPPOPOTAMI.

While few menageries or zoological gardens include hippopotami among the members of the animal world which they contain, the general public is nevertheless quite familiar with the appearance and characteristics of the great ungulates. They have been described in word and picture by innumerable naturalists, historians, and writers, even of the earliest times. We find unmistakable reference to them in the records of the ancient Egyptians, and to-day there is little doubt that the behemoth of the Bible was identical with the hippopotamus. The Central Park Zoo, of New York city, is particularly fortunate in the possession of three splendid specimens, a pair of older animals and a young one. The pair, Caliph and Miss Murphy, are well known, not only to those directly interested in these matters, but also to the reading public, for the huge brutes have been repeatedly described and pictured in various publications.

Caliph, the great male which is the subject of the accompanying interesting engravings, has been in the Central Park Zoo since 1889, while his mate, Miss Murphy, has been included in the collection for a somewhat shorter period. These two have proven remarkably prolific, and have presented an admiring public with eight healthy offspring, and these, with the exception of the young one at present in the Park, have been sold to other menageries. This is not an exceptional case, for strangely enough these curious beasts thrive well in captivity, and breed not infrequently. Were it not for the difficulty formerly experienced in securing original pairs, they would to-day be far more common in zoological parks. Needless to say, it is very difficult to capture the hippopotamus in a wild state and transport the animal uninjured to civilization, though if this be accomplished successfully, he takes kindly to captivity, and often lives contentedly for many years. In fact, a single specimen existed in the Zoological Park in London for over twenty-eight years.

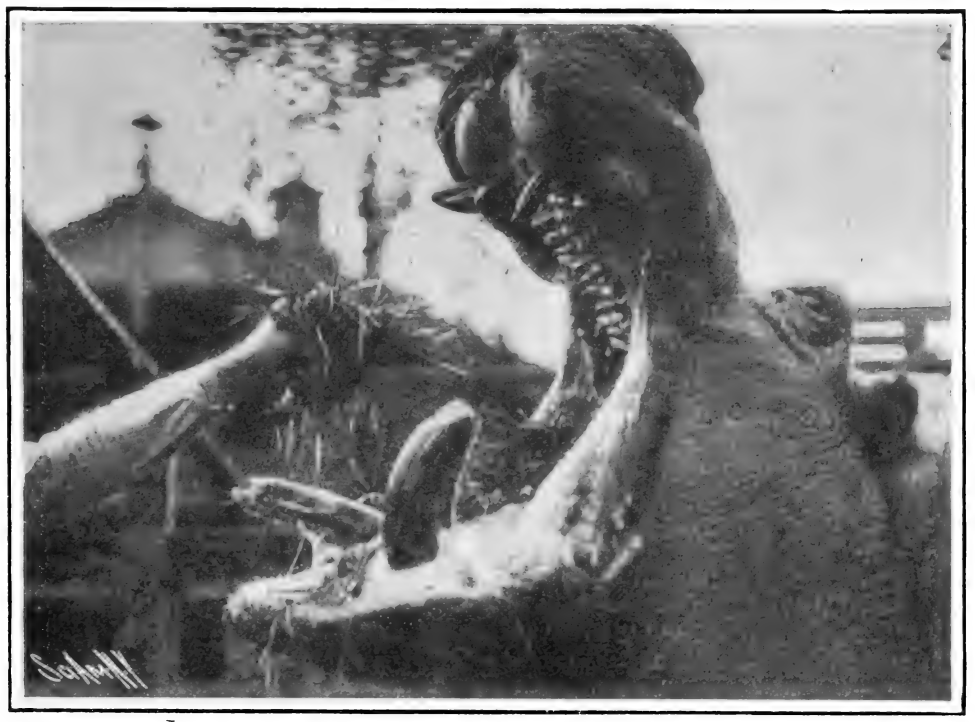

Feeding Time.

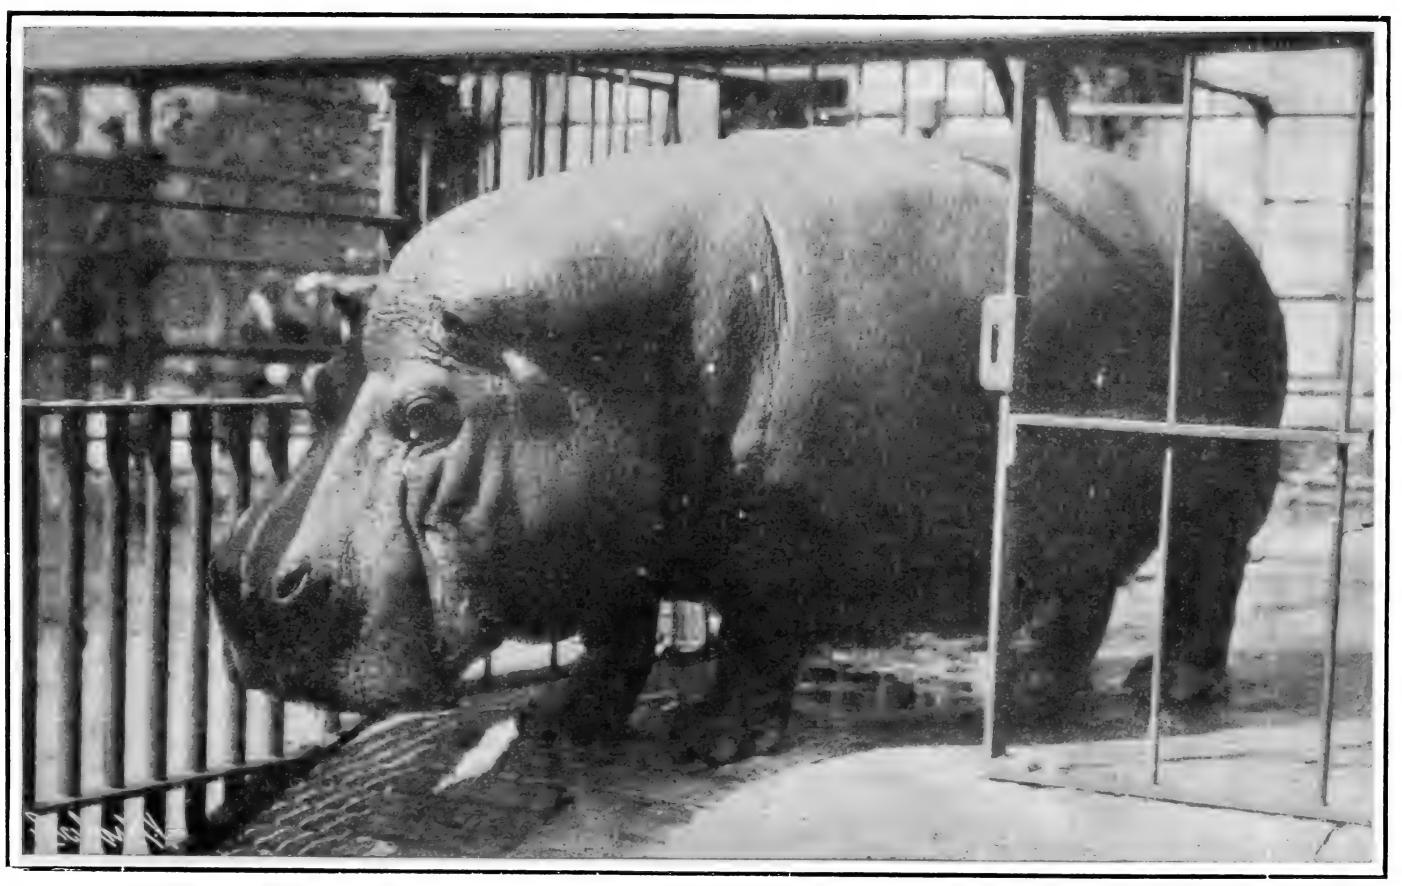

"Caliph," the Giant Hippopotamus of the Central Park Menagerie, New York City.

"Caliph" Musing

CAPTIVE HIPPOPOTAMI.

Hippopotami in captivity do not require the excessive care and attention which are usually necessary for the well-being of tropical animals. One factor which is of considerable advantage in this respect is the fact that the animals lack the restlessness and nervousness so commonly found in wild creatures. Though terrible fighters if aroused, they are even-tempered and fairly intelligent, and learn to obey the word of command of their keepers. They appear to appreciate kindness, and seldom if ever require punishment.

Hippopotami are purely herbivorous, and in the wild state feed upon grasses, various water plants, rice, millet, maize, and similar growths. This diet is approximated as nearly as possible in captivity. They are fed every day, usually early in the afternoon, on fresh grass or hay, various vegetables, and bread. They have very healthy appetites, and we can imagine the quantity of food that a "hippo" can consume, when we consider that the stomach of a large specimen will measure as much as eleven feet in length.

The hippopotamus is heir to few troubles. Mutual attrition keeps his teeth, which grow throughout his lifetime, within proper bounds. One of the accompanying illustrations clearly portrays the molar characteristics of the animal. As he not only spends most of his waking hours in the water, but often sleeps there also, the frequent immersions keep his thick skin in a healthy condition. The water must have a temperature of not less than fifty-five degrees, and must be maintained at this point the year around. With the exception of the usual attention regarding the cleanliness of the habitation, other necessary care includes merely the proper preparation of his food and the regulation of the temperature.

A large gas company of Paris has lately bought three patents for the commercial manufacture of a gas which is rich in methane, and this will allow the gas works to utilize the gas-carbon which is not easy to dispose of. Methane has a high calorific power and when used in connection with the incandescent gas mantles it gives a better light than is obtained with ordinary coal-gas. One of the patents provides for suppressing the carbon monoxide which may remain in the gas, so that it can be employed generally and will not meet with the opposition which water-gas encounters in France and which prevents its extensive use. The principle of the process consists in making hydrogen react in a catalytic manner on oxide of carbon in the presence of nickel. To produce the right quantity of methane, CH_4, we need a greater amount of hydrogen than ordinary water-gas contains, so that the new method seems to be summed up in the production first of water-gas, then of an excess of hydrogen, and the two gases are put in the presence of the catalytic agent in the right proportion. As yet the process is in the experimental stage. Tests made at Lyons show that the reactions on which it is based occur as was predicted, and it now remains to operate it on a large scale and find whether it has all the superiority that is claimed for it.

The use of tantalum as a filament for electric lamps is deprecated on account of its tendency to soften.

AN AUTOMATIC BICYCLE PUMP.

In the accompanying engraving we illustrate a novel bicycle pump, which is designed to be attached directly to the bicycle wheel, and which will operate automatically to inflate the pneumatic tire of the wheel as the wheel rotates. The controlling levers which set the pumps in action are conveniently located on the upper cross-bar of the bicycle frame, so that the rider may readily set in action either the pump on the front wheel or that on the rear wheel, or both, as desired. The pumps are not of ordinary form, but are curved as indicated in the illustration, so as to lie parallel with the rims of the wheels, to the spokes of which they are attached. Flexible tubes connect the pumps with the inflating nipples of the tires. The curved piston rod of each pump is provided at its outer end with a crosshead to which a lever is attached. This lever is fulcrumed to the hub of the wheel, and at its opposite end carries a pin which engages a slot in the head of a short trip lever. The latter is pivoted on a clip attached to the spokes of the wheel. Each pump is operated by an arm pivoted to the forks of its respective wheel. This arm lies in the path of the crosshead on the piston rod, so that as the wheel rotates, the piston is forced into the pump cylinder. Fastened to the spokes just above the pump cylinder is an inclined metal plate which, when the piston has been forced home, engages the operating arm and lifts it clear of the crosshead. As the wheel continues to revolve, the operating arm engages the trip lever, drawing the piston out again. This action continues as long as the operating arm lies in the path of the lever and crosshead. Normally, the operating arm is lifted, against the action of a spring, by the controlling lever, to which it is connected by means of a wire. Mr. Patrick J. McGinn, of Salisbury P. O., Rhodesia, South Africa, is the inventor of this improved bicycle pump.

Though we have shown this pump applied to a bicycle, it is obvious that it could be used, as well, on an automobile or any other vehicle equipped with pneumatic tires.

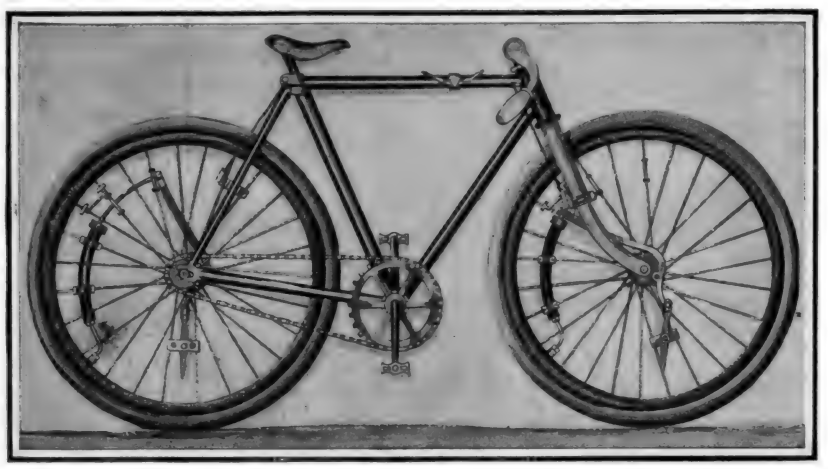

AN AUTOMATIC BICYCLE PUMP.

AUTOMATIC SWITCH THROWER FOR STREET RAILWAYS.

Our present methods of tending switches of street railways are very primitive. At busy junctions a man is posted to operate the switches, but at all other points the motorman must bring his car to a stop and throw the switch himself. Inventors have long been endeavoring to remedy these conditions by devising some simple mechanism for automatically controlling street railway switches. In many cases these efforts have failed, owing to the fact that the mechanisms were too expensive or complicated, or because they offered treacherous obstructions to the ordinary travel of the street. In the accompanying engraving we illustrate one of the successful inventions which has overcome these objectionable features and has proved its value in practice. This automatic switch thrower has been used for two years on the systems of the British Columbia Electric Railway Company in Vancouver, Victoria, and New Westminster, giving entire satisfaction. The operation of the switch is clearly shown in the detail views, of which one is a side elevation of the switch thrower with the casing partly broken away, and the other is a plan view of the same. Fitted to the switch tongue is a dog, which is connected by a rod to an angle lever. The latter is protected by a cast-iron box, within which it is fulcrumed. A wrought-iron pipe connects this box with a long cast-iron casing in which the triggers are mounted to slide. Within the cast-iron pipe is a connecting rod attached at one end to the angle lever and near the opposite end to the forward trigger. The rear trigger is connected to a rod by means of a chain, which passes over a pulley at the rear of the trigger casing. By this arrangement, it will be evident that when the rear trigger is pushed forward the connecting rod will be drawn back, throwing the switch tongue to the right, while if the other trigger is operated the rod will be pushed forward, throwing the switch to the left. The triggers are mere blocks of metal, which project above the face of the trigger casing. They are operated by means of a lever fulcrumed below the front platform of the car. The rear end of the lever is provided with a lug adapted to engage the triggers, and a roller adapted to hold the lug at proper level to strike the triggers. A short rail is spiked down, just back of the trigger casing, for the roller to travel on. A spring holds the lever normally clear of the triggers, but the motorman can at any time lower the lever by depressing a push-bar with his foot. When in this position the lug will strike the trigger, pushing it forward into a hood which is formed on the casing, and the lug, in the meantime, will ride up the inclined side walls of the hood, and thus pass on over the trigger. In use, when it is desired to close the switch for the main line, the motorman depresses the push-bar just as the first trigger disappears under the fender, and holds it down until he sees that the switch is thrown. To throw for a branch line the push-bar is depressed as the forward trigger disappears under the fender. It is not necessary to stop the car when operating the switch, though the speed should be reduced to about two miles an hour.

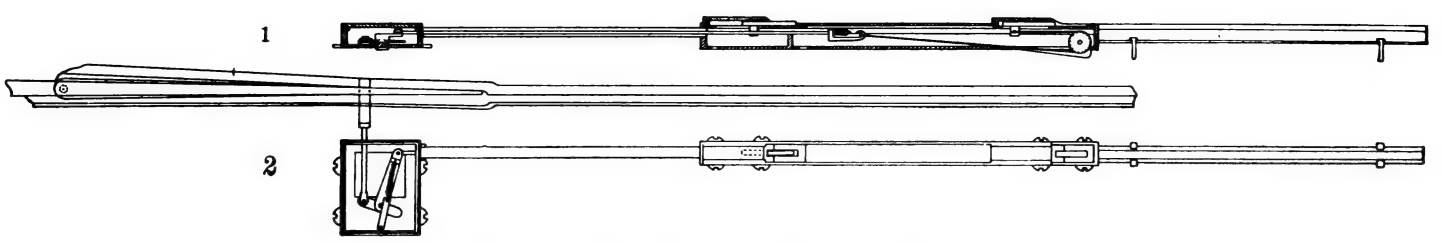

DETAIL VIEWS OF THE AUTOMATIC SWITCH THROWER.

POSITION OF THE SWITCH THROWER AS IT IS OPERATED BY THE MOTORMAN ON THE CAR.

A New Road-paving Material.

Great interest is being manifested among British surveyors and municipal authorities in a new road-making material called "tarmac." As the name signifies, this process comprises the utilization of a tar and macadam. The raw material consists of ironstone slag rejections, hitherto a practically wasted product, immersed in tar. The refuse is used immediately upon its withdrawal from the furnaces in a white-hot condition. It is allowed to cool somewhat, and is then broken to a requisite gage, varying according to whether it is for bottoming or finishing purposes. After crushing, and while still hot, the slag is placed in a cylindrical mixer, where it is incorporated with a mixture of tar, creosote, and one or two other ingredients. This process insures the complete saturation of the hard, tough slag with the oils of tar. Upon withdrawal from the mixer, the material is ready for use.

In making up a road with tarmac no elaborate and expensive preparations are necessary so long as the thoroughfare possesses a solid, strong bottom. No concrete foundation, such as is essential for asphalt, is necessary. It is only required to see that the road surface is smooth and that all loose stones have been removed. If the operations are carried out during the season when the weather is uncertain it is advisable to wash the road with tar, so that no interference with the work be caused through rain. Any inequalities or holes that are present in the surface of the road are cut out, tarred and then patched with a fine grade of tarmac well rammed down with a hand rammer.

The road is first covered with a layer of coarse tarmac to a depth of about 2¼ inches in thickness, though the proportion of this layer depends to a great extent upon the strength of the road, and the extent of the traffic which passes over it. Care must be observed to see that every stone touches its neighbor, so that the layer may be homogeneous and solid. The material is then rolled down carefully with a roller of medium weight, and any shaping that is necessary to the road is carried out at this stage.

When the first layer has been thoroughly consolidated it is allowed to stand for two days. A second finishing strata of tarmac of 1½ gage is then applied and similarly rolled. The result of this operation is to fill the interstices in the surface of the first layer, and to present a level, even face to the traffic. A final thin layer of slag dust is then carefully spread over the surface, completely filling any minute interstices in the road surface, and when the superfluous dust is removed a day or two later, a road surface as smooth as asphalt results.

The road by this treatment is provided with a solid coating about 3½ inches in thickness, absolutely watertight, since no water can possibly percolate through, owing to the method of construction, to the foundations beneath. Nor can the road surface be disintegrated either by the sucking action of automobile pneumatic tires, heavy wheels, or animal traffic. Another conspicuous advantage is that the roadway never becomes dusty or muddy according to the nature of the weather, as inevitably results with ordinary macadam, nor does the surface become slippery during rain, as is the case with asphalt and wood pavings. Furthermore, the expense of cleansing and sweeping is appreciably reduced, and, owing to the nature of the material, it is very durable, requires scarcely any attention, and when once laid will last for years.

Tarmac is considerably cheaper than granite macadam, and, unlike tarred granite and similar road metaling materials, as it wears it always presents a gripping surface. Owing to the fact that the heated slag during manufacture absorbs a large proportion of the tar and other mixing ingredients the life of the material is greatly enhanced.

A stretch of road in a London suburb has been treated with this material for a distance of 1,950 feet by 22 feet 6 inches wide. This highway is subjected to heavy traffic, and although the roadway was paved over eighteen months ago, no signs of wear are yet observable. The cost of treating this section was about $2,125 as compared with $1,480 for making it up with granite.

The difference in the initial expenditure, however, has been more than counterbalanced by the greater economy effected in the question of maintenance. Any ordinary macadam roadway in dry weather requires constant watering to alleviate the dust nuisance. On the other hand, the tarmac road did not require watering for three months. With the latter road cleansing and sweeping was greatly facilitated and expedited. Consequently, when considered from all points of view, the tarmac road has proved considerably cheaper in the long run, and whereas the granite macadam requires remaking every three years, the tarmac road will last at least six years. With regard to ease and comfort in traveling over the two materials there is no comparison, since the tarmac roadway always affords a level, even surface.

The advantage of the tantalum lamp is its high efficiency. It takes only half the current of an ordinary carbon-filament lamp of the same voltage and candle-power; consuming at the beginning of its life about 1.7 to 1.93 watts per candle-power, as against 3.5 to 4 watts per candle power.

RECENTLY PATENTED INVENTIONS.

Electrical Devices.

INTERNAL-COMBUSTION-ENGINE REGULATOR.—A. N. HATHERELL, Appleton, Wis. This invention relates to means for automatically regulating the speed of internal-combustion engines. The regulator consists principally in a swinging contact member actuated by centrifugal force through the revolution imparted to the regular member in time with the operation of the engine, said contact member being combined with conducting devices in such a manner as to short-circuit the electrical igniting apparatus, thus stopping the ignition of the charge of fuel when the speed of the engine becomes too great.

Of Interest to Farmers.

WIRE-FENCE LOCK.—J. W. DRUMMOND, Chillicothe, Ohio. The object of the improvement is to provide a simple, cheap, and easily-applied lock for connecting the horizontal strands of a wire fence to the vertical cross members or stays in such manner that the lock will be a strong and rigid connection of the two members and will not slip on either of them.

PLOW.—J. COLLINS, Dockery, Miss. The plow is especially adapted for opening new ground, but may be successfully employed in all work adapated to the plow. Adjusting mediums are provided for a knife-colter whereby said colter may be given vertical adjustment to or from the point of the share, which mediums can be quickly and conveniently operated and are of such construction that a guide is provided for the colter between its ends and the colter is held at the side of the beam, the colter's adjustment being made by sliding the mediums to and from the heel of the beam.

TRACTION-ENGINE.—R. REED, Logansport, Ind. The engine is capable of general use, but is especially adapted for agricultural purposes and to which many kinds of farm implements may be applied. The device will operate any kind of a farm implement that can be drawn by horses or a motor. Means are provided whereby the power can be transmitted to all of the wheels upon which it operates. Also for turning the vehicle about sharp corners by operation of the motor itself, and for additional manually-operated steering means. Power may be applied at will to rear and front wheels or either alone for changing speed and direction of motion.

LEVELING AND RAISING DEVICE.—G. H. TENPAS, Sherman, N. Y. The aim of this inventor is to provide a leveling and raising device which forms a permanent part of a portable machine, such as a grain-separator or the like, and which is arranged to permit convenient leveling of the body of the machine or raising the same, if necessary.

INSECT-DESTROYER.—L. TANNER, Cheneyville, La. This insect-destroyer is especially designed for destroying boll-weevils, cotton caterpillar-moths, boll worm-moths, sharpshooters, and other insects injurious to the cotton-plant and other growing plants. It can also be used on insects in gardens and orchards.

Of General Interest.

SCRAPER.—I. W. EVERY, Athens, N. Y. In its preferred embodiment the invention comprises a carriage formed of two runners with rigid connection between them. On the runners is arranged a movable draft-bar, and to this bar is connected a scraper proper, which is normally held rigid with the carriage, but which upon the release of a latch is drawn to the bar into dumping position. Operation is entirely automatic except for manual operation of the latch. The scraper removes snow from ice or other surfaces, but is useful in connection with other materials.

STEAM-TRAP.—E. J. RYAN, Danville, Ill. The object of the invention is the provision of a new and improved steam-trap arranged to periodically and automatically insure a complete discharge of the water of condensation without danger of leakage of steam. The device is composed of comparatively few parts, not liable to easily get out of order.

IMITATION EMBROIDERY.—N. NOËL, St. Chamond, Loire, France. The present invention relates to letters of the alphabet, figures, and other embroidered signs the characteristic feature whereof resides in the fact that the letters and signs are made with a cord having swollen portions. These letters applied on paper are sewed upon all kinds of tissue. They are made of thread or cord having some parts thicker than others, corresponding to the calligraphic outline of a previously-made design.

SHIRT AND GARMENT SUPPORT.—S. LONDON, New York, N. Y. The improvement has reference to shirts or shirt-waists, such as worn by small boys. The object of the invention is to provide a garment of this kind with means for supporting the trousers in a resilient or elastic manner without recourse to suspenders.

GIRDER-CARRIER. — C. L. KETCHAM, Springfield, Mo. This device handles heavy bridge-girders and deposits them in place upon the structure to which they belong. It is of especial use where desirable to avoid delaying traffic by blocking up the main line over the bridge. It also effects economy in construction, both as to the number of men employed and the time required for accomplishing the placing of the girders.

Pertaining to Vehicles.

HORSE-COLLAR.—J. S. HULL, Manly, near Sydney, New South Wales, Australia. This pneumatic horse-collar comprises an outer casing and a pair of inner independent inflatable pads and having the lower ends thereof closed and overlapping one another, each pad being provided with an inflating-valve and provided at its lower end with an opening for a cord for introducing the pad within the casing.

VEHICLE-WHEEL.—J. M. CARPENTER, Millersburg, Ohio. In this case the invention pertains to improvements in wheels for vehicles, particularly automobiles, the object being to provide a wheel with hard metal or steel teeth on its periphery to prevent slipping on ice or frozen ground, the parts being so arranged as to not interfere generally with the spring-yielding of the wheel.

Designs.

DESIGN FOR A TOILET-POWDER RECEPTACLE.—W. A. BRADLEY, New York, N. Y. Mr. Bradley has invented a new and original design for toilet-powder receptacles. The body of this receptacle is nearly round, being slightly flattened in its broadest part. It is flat bottomed. The head tapers from neck portion up to the orifices at the top and the whole constitutes a very graceful and ornamental toilet article.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Business and Personal Wants.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. **In every case it is necessary to give the number of the inquiry.**
MUNN & CO.

Marine Iron Works. Chicago. Catalogue free.

Inquiry No. 7496.—For manufacturers of iron baking ovens and bakers' supplies.

"U. S." Metal Polish. Indianapolis. Samples free.

Inquiry No. 7497.—For makers of pin machines.

Drying Machinery and Presses. Biles, Louisville, Ky.

Inquiry No. 7498.—For makers of luminous paint.

Handle & Spoke Mchy. Ober Mfg. Co., 10 Bell St., Chagrin Falls, O.

Inquiry No. 7499.—For machinery for manufacturing steel pens, nibs and holders.

Sawmill machinery and outfits manufactured by the Lane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 7500.—For manufacturers of hot air pumps.

I sell patents. To buy, or having one to sell, write Chas. A. Scott, 719 Mutual Life Building, Buffalo, N. Y.

Inquiry No. 7501.—Wanted, a machine for automatically affixing postage stamps to letters.

WANTED.—Patented specialties of merit, to manufacture and market. Power Specialty Co., Detroit, Mich.

Inquiry No. 7502.—Wanted, a machine for stamping letters on metal disks.

The celebrated "Hornsby-Akroyd" Patent Safety Oil Engine is built by the De La Vergne Machine Company, Foot of East 138th Street, New York.

Inquiry No. 7503.—Wanted, a machine for manufacturing corkscrews.

WANTED.—Young man experienced in drafting and designing textile machinery "New England." Machinery, Box 773, New York.

Inquiry No. 7504.—For makers of paper bottles, for milk delivery, also of machines for corking the same.

WANTED.—Ideas regarding patentable device for water well paste or mucilage bottle. Address Adhesive, P. O. Box 773, New York.

Inquiry No. 7505.—Wanted, a machine for projecting opaque pictures or objects.

FOR SALE.—Paying up-to-date metal working plant. Best location; good building. $75,000, or will sell large interest to right man. Chance, Box 773, New York.

Inquiry No. 7506.—For the manufacturer of the explosive Rack-a-rock.

Manufacturers of patent articles, dies, metal stamping, screw machine work, hardware specialties, machinery tools and wood fibre products. Quadriga Manufacturing Company, 18 South Canal St., Chicago.

Inquiry No. 7507.—Wanted, woodworking machines for sash and door factory.

WANTED.—An experienced master mechanic, who has received not less than $2,500 per year, to take charge of a large manufacturing plant in New England. References required. Plant, Box 773 N. Y.

Inquiry No. 7508.—For makers of portable houses.

Absolute privacy for inventors and experimenting. A well-equipped private laboratory can be rented on moderate terms from the Electrical Testing Laboratories, 548 East 80th St., New York. Write to-day.

Inquiry No. 7509.—Wanted, a small ice machine of about 50 to 100 pounds a day.

Manufacturers of all kinds sheet metal goods. Vending, gum and chocolate, matches, cigars and cigarettes, amusement machines, made of pressed steel. Send samples. N.Y. Die and Model Works, 508 Pearl St., N.Y.

Inquiry No. 7510.—For the makers of the Garden City Rotary Air Compresser.

INVENTIONS WANTED.—Undersigned will consider one or two good patented or patentable inventions to manufacture on royalty. Something in popular demand preferred. Honest treatment guaranteed. F. Raniville Company, Grand Rapids, Mich.

Inquiry No. 7511.—Wanted, the makers of a novelty called the Tumbler, being a blue capsule with a buck shot in it, and small American flag around it; the capsule to hold about 1 ounce.

WANTED.—Competent man who has knowledge of Mechanical Engineering, to take a position as traveling salesman for the selling of construction material used in Insulating Refrigerating Plants. Apply by mail to the Bruening Cork Company, Oakdale, All'y Co., Pa.



"Star" Foot and Power Screw Cutting Automatic Cross Feed Lathes
FOR FINE, ACCURATE WORK
Send for Catalogue B.
SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N.Y., U.S.A.

Engine and Foot Lathes
MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE
SEBASTIAN LATHE CO., 120 Culvert St, Cincinnati, O.

Foot and Power and Turret Lathes, Planers, Shapers, and Drill Presses.
SHEPARD LATHE CO., 133 W. 2d St. Cincinnati, O.

GIANT STEAM SHOVELS

Toledo 125 Ohio, U.S.A. Vulcan Place
The Vulcan Iron Works Co.


Carriage Motors
For Bicycle, Contact or Jump Spark
One Piece Casting. Light Weight. Large Bearing Surfaces. Write us to-day
GRANT-FERRIS CO.
Troy, N. Y.

Presses for Sub-Press Work.
Five sizes. Sub-Presses and Tools to order.
Send for Catalogue.
BLAKE & JOHNSON,
P. O. Box 1054, WATERBURY, CONN.

PERFECT - PUMP - POWER.

is attained only in the TABER ROTARY PUMPS
They are mechanical, simple and durable. Will pump hot or cold fluid, thin or thick. Requires no skilled mechanic. Most power at least cost. All parts interchangeable. Made of iron, steel or bronze. Can be driven by belt, motor or engine attachment. *Large Illustrated Catalogue free.*
TABER PUMP CO., 32 Wells St., Buffalo, N.Y., U.S.A.


PHONOGRAPHS
LATEST RECORDS. FREE CATALOGUE No. 16
EUGENE CLINE & COMPANY,
50 Dearborn St., Chicago, Ill.

THE EUREKA CLIP

Size No. 2
The most useful article ever invented for the purpose. Indispensable to Lawyers, Editors, Students, Bankers, Insurance Companies and business men generally. Book marker and paper clip. Does not mutilate the paper. Can be used repeatedly. In boxes of 100 for 25c. To be had of all booksellers, stationers and notion dealers, or by mail on receipt of price. Sample card, by mail, free. Manufactured by **Consolidated Safety Pin Co.,** Box 121. **Bloomfield, N. J.**


An Automatic Pump
that works wherever there is a spring, creek or pond. It costs but little and works day and night without attention or expense. **The Niagara Hydraulic Ram,** USED AND INDORSED BY THE U. S. GOVERNMENT. Is made in all sizes. Free booklet and terms to agents upon request.
Niagara Hydraulic Engine Co
140 Nassau St., New York
Factory Chester, Pa.

Do You Use Chucks?
If so our catalogue will interest you. Sent free. New styles. New sizes. Liberal discounts.
THE CUSHMAN CHUCK WORKS
Chucks Exclusively Hartford, Conn.


JAGER Marine 4-Cycle Engines
Skillfully designed and well built. Single lever control, combining automatic carburettor with spark advance. Develops wide speed range and reliability under most trying conditions. Sizes 3 to 60 h. p. Send for catalog.
CHAS. J. JAGER CO.
Cor. High and Batterymarch Sts., Boston, Mass.


French Motors for Lighting Plants
The "ASTER" is the best French motor on the market for lighting houses, hotels, etc. Small, compact, simple and safe to operate. Motive power alcohol, oil or gas. 2 and 4 cylinders. Great power for small engines. Easy running. Write for illustrated Price List.
ASTER COMPANY
1591 Broadway NEW YORK CITY


THIS GRINDER
Has no pumps, no valves. No piping required to supply it with water. Always ready for use. Simplest in construction, most efficient in operation. *Price will interest you.*
W. F. & JNO. BARNES CO.,
Established 1872.
1999 Ruby St., Rockford, Ill.

Notes and Queries.

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(9840) J. F. writes: In regard to the answer to question 9697, SCIENTIFIC AMERICAN, July 15, 1905. I doubt that the lead ball should strike the ground earlier than the one of cork. Supposing the balls to fall in a vacuum from the same height and at the same instant, the only force acting on them will be the force of gravity. This force produces a constant accelerating velocity of 32.16 feet per second on any freely falling body, disregarding weight or shape. Therefore both balls will receive the same velocity and consequently strike the ground at the same time, when falling in a vacuum. In the case of bodies falling in the atmosphere, the only difference from the former case consists in the introduction of the resistance of the air, retarding the velocity produced by the force of gravity, and whose effect on the falling body depends only upon the amount of surface the latter presents to the air. The shape of the balls being the same, the resistance of the air will be the same for each. The resulting velocity, or velocity produced by the force of gravity minus the amount of velocity neutralized by the resistance of the air, is the same for each ball, the two terms of the expression being the same for each, they reaching the ground, therefore, the same instant also when falling in the atmosphere.

(9841) C. V. asks: Please give formula for "frosting" incandescent lamps (electric): also for dyeing same in either three following colors: scarlet, blue, and green. How long should they remain in frosting or dyeing fluid for good, permanent frost or dye? A. The colors used for dipping incandescent lamp bulbs are generally aniline dyes dissolved in varnish. A transparent varnish should be used, and made quite thin. It is better to make several dippings of a thin color than to attempt to reach the depth desired by one dipping. The bulbs must be perfectly clean and dry when dipped. They may be washed in soap and water, dried, and wiped with alcohol just before dipping. The hands should not touch them after the washing. A good method for doing the same thing by means of photographer's collodion is given in SCIENTIFIC AMERICAN, Vol. 74, No. 10, answer to query 6751, which we send for ten cents. Another good article upon the subject may be found in SUPPLEMENT No. 948, price ten cents.

(9842) J. R. D. asks: If agreeable, will you kindly advise what metal has the most expansive property when subjected to heat, and also state to what extent quicksilver or mercury will expand by heat, and whether or not quicksilver expands more by heat than does water? A. We give you the rates of expansion of several of the metals which expand most rapidly by heating: Potassium 0.000249, sodium 0.000218, mercury 0.000182, indium, 0.00014, cadmium 0.000094, lead 0.000088, aluminium 0.000070. Mercury expands more than water does for the same change of temperature near the freezing point. The rate of expansion of water as given in the "Physico-Chemical Tables" of Castell-Evans is 0.0000644. All the figures we have given above are from the same tables, which are of the highest authority.

(9843) J. F. W. asks: 1. In a series or current transformer, will the E. M. F. of the secondary vary as the current in the primary increases or decreases, the E. M. F. of the primary remaining constant? A. In a transformer the voltage in the secondary varies with the ampere turns of the primary. Hence a change in the amperes in the primary would make a corresponding change in the E. M. F. in the secondary. 2. In the boosting transformer when the primary winding is connected across the mains and the secondary in series with the circuit, the E. M. F. of the secondary is added to that of the circuit. If both windings be connected in series with the circuit and with each other, as in the following diagram, what, if any, effect will take place in the E. M. F. of the circuit? A. If both primary and secondary were connected in series with the line, they would simply act as any other inductive resistance would act, and would retard the current. They would simply constitute a part of the load of the dynamo.

"These two I use daily."

ARNICA Tooth Soap

Is antiseptic; preserves while it beautifies. No spilling or wasting; convenient and economical.

25 Cents At all Druggists

STRONG'S

Arnica Jelly (Carbolated)

Keeps the skin free from roughness and pimples. Nothing better for sunburn or chapping; also for cuts, bruises, burns and all eruptions. Keeps the skin soft, smooth and delicate. The collapsable metal tube is convenient and unbreakable.

Take it with you wherever you go. If your druggist hasn't it—Send to us.

Sent postpaid on receipt of 25 cents.

C. H. STRONG & CO.
CHICAGO

DIAMONDS on CREDIT

What is *your* knowledge of Diamonds? Could *you* tell the proper price of a genuine Diamond? Could *you* detect a brilliant, imitation stone from the genuine? If not, don't take risks when you buy. Make sure of getting a genuine Diamond at the lowest market price, by ordering from a house of *national reputation*. Ours is the oldest Diamond House in the Trade. We give a guarantee of genuineness with every Diamond we sell, and to persons of good character we give terms of credit. *Transactions strictly confidential.*

20% Down and 10% per Month

By importing Diamonds "in the rough," polishing them here and selling them direct to consumers, we can quote prices 20% lower than any competitor. If you can duplicate our values at your dealer's, we will take back your purchase and refund your money. *Send for our free catalogue number 23*

J. M. LYON & CO.

ESTABLISHED 1843

65-67-69 Nassau Street New York

Control Your Car

and avoid accidents. The Watres **Spent Gas Brake** by a touch of the finger instantly controls any car, big or little. The engine does all the work of motoring and does it with greater strength and suddenness than is possible to human power. The device costs $50, but it's worth $500 in insurance. Also blows a powerful whistle and inflates tires. Is not disfiguring because it is under the car, out of sight.

Gas Engine Whistle Co., 1137 Broadway, New York

Booklet No. 1, Brake; No. 2, Motor Boat Whistle; No. 3, Stationary Whistle. Chicago Representative, Wm. R. Johnston, 1536 Mich. Ave.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending November 7, 1905

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Adding machine, E. Ebinger	803,571
Addressing machine, J. S. Duncan	803,677
Agricultural implement, S. L. Allen	803,536
Air brake mechanism, J. Dillander	803,564
Air brake mechanism, R. W. Kelly	804,136
Air brake release and signal valve, F. H. Dukesmith	803,746
Air brake system, F. H. Dukesmith	803,815
Air brakes, double heading valve device for, Herr & Turner	803,591
Air compressor, C. Neumann	804,027, 804,159
Alloy, F. W. Moffett	803,921
Alloys, making zinc, P. & A. Guhrs	804,006
Ammonia by synthesis, making, H. C. Wolterreck	803,651 to 803,653
Animal stock, J. H. Kendall	803,600
Apron or conveyer, traveling, I. Trolley	803,643
Auger bits, die for making, C. C. Hiatt	803,824
Auger, earth, E. B. La Mont	804,141
Auriphone, R. W. Goers	803,892
Awning and blind, combined, J. Lang	803,696
Axle box, car, A. G. Elvin	803,747, 803,748
Axle for vehicles, steering, F. A. Law	803,636
Baling press, G. E. Rider	803,626
Balloon apparatus, captive observation, R. B. Eubank, Jr.	803,573
Banana slitting and peeling mechanism, A. Hicks	803,761
Banker, T. O. Sharp	803,719
Bath apparatus, needle, S. J. Jackson	803,598
Bearing for car journal boxes, J. M. Hopkins, reissue	12,401
Bearing metal, antifriction, F. W. Moffett	803,920
Bearing, roller, Reynolds & Travers	803,625
Bearing, vehicle wheel, H. C. Peterson	803,849
Bed, folding, H. D. Parlee	803,779
Bed, invalid, B. McMahan	803,619
Bed, metallic sanitary folding, E. J. Baker	803,085
Beet root topping machine, A. Pruvot	804,172
Beets, treating sugar, M. Weinrich	803,945
Belt deflector, polishing, E. W. M. Baily	803,800
Belt fastener, J. P. Sarle	803,716
Belting or the like, manufacturing, J. S. Patterson	803,781
Bench leg, R. S. Brown	803,873
Bending machine, R. A. Carter	803,988
Benzin can, J. E. Baker	803,964
Berry box, W. C. Miner	804,151
Berths and analogous devices, controlling apparatus for suspended ships', W. Whitehouse	803,947
Bicycle fan attachment, D. Stahlhut	803,635
Billiard cushion, J. S. Patterson	803,780
Billiard table, Elliss & McGuire	803,998
Binder for leaves, R. D. Miller	803,705
Binder, loose leaf ledger, and the like, temporary, G. Higginson	804,007
Bit brace, H. J. Cook	803,669
Blanket protecting device, Chaloner & Chipchase	803,991
Block signal system, C. E. Bennett	803,539, 803,540
Blocks, type, and other printing matter in forms, clamp for securing, R. Andrieu	804,183
Blower, C. Neumann	804,028
Blowpipe, gas, E. Fouche	804,002
Boat, life, F. W. Brown	804,095
Boat or ship, C. P. Leavitt	803,607
Boat spray and water guard, H. C. Morse, 804,154	804,155
Boat, submarine, H. O. Eiane	803,885
Boiler cleaner, B. Irwin	804,194
Boiler connection, superimposed, Karl Schmelzer	804,174
Boilers to service condition, cleaning and restoring, A. R. Raymer, reissue	12,403
Bolt cutter, C. K. Lassiter	804,142
Book for recording scores in contests, T. G. Tritt	804,177
Bottle case or crate, Adams & Rice	804,081
Bottle closure, C. C. Smith	803,860
Bottle, non-refillable, T. G. Clifford	803,992
Bottle, nursing, F. Herb	803,590
Bottle stopper, O. H. Fishburne	804,188
Bottle warmer, nursing, B. L. Gwynne	803,756
Bottle washing machine, J. A. Prince, 803,850	804,170
Box fastener, G. Klenk	804,138
Brace bit depth gage, E. J. Tiede	803,939
Bracelet, S. B. Kent	804,137
Brake beam, Buhoup & Ritter	803,874
Brake mechanism, W. Hefflin	804,124
Brazing compound, J. W. Ball	803,802
Brick mold, building, W. Porten	804,169
Brine distributing apparatus for cooling systems, F. Ohde	803,925
Briquet making press or apparatus, H. A. Steven	804,065
Briquets, manufacturing, G. Hopfner	804,193
Bromo lecithin and making same, P. Bergell	803,541
Bronzing machine, Gardner & Newton	804,112
Broom attachment, G. M. Stewart	804,066
Brooms and brushes, manufacture of, S. G. Roseman	803,857
Brush holder, N. C. Bassett	803,803
Brush holder, H. G. Reist	803,853
Brush, tooth, W. S. Davenport	803,995
Buckle, R. A. Brown	803,546
Buckle, T. H. Fishel	803,576
Buckle, T. S. Haley	803,822
Building block mold, W. Porten	804,041
Building block mold, C. J. W. Hayes	804,122
Burial casket, C. E. Myers	803,843
Button, G. F. & A. J. Grove	803,754
Button working machine, H. Chalmers, reissue	12,400
Can. See Benzin can.	
Candle and candle wick, J. Pereira	803,848
Candles, apparatus for making, J. Pereira	803,847
Candles, making, J. Pereira	803,846
Car brake, E. H. Miller	803,614
Car brake safety device, E. H. Miller	804,150
Car construction, metallic, T. R. Brown	803,663
Car coupling, J. A. Frenzel	803,579
Car coupling, E. O. Evans	803,749
Car coupling, automatic, W. A. Palmer	804,031
Car extension step, railway, E. Sirois	804,062
Car floor doors, mechanism operating, A. Campbell	803,876
Car grain door, railway, K. Osel	803,707
Car seat, J. Applin	803,962, 803,963
Car switching attachment, railway, H. Fenske	804,060, 804,001
Carbureter, gas engine, O. Minton	804,025
Card and merchandise holder, C. O. Chapin	803,878
Card and photograph holder, A. S. Carlson	803,552
Cartridge holder, auxiliary, J. T. Brayton	803,983
Cartridges in clips, machine for assembling, O. M. Lissak	804,018
Cash register, R. H. Riddle	803,714
Caster, F. B. Upton	803,645
Caster, ball bearing, E. W. Fishburne	803,682
Celluloid and the production thereof, non-inflammable, G. E. Woodward	803,952
Cellulose, manufacturing films or threads of, M. Fremery, et al	804,191
Cement block machine, J. L. Hancock	803,823
Cement block machine, D. W. Weller	803,865
Cement post fastening, H. McMaster	803,706
Chain, R. A. Carter	803,987
Chart for drafting women's skirts, W. McDowell	803,778
Check controlled apparatus, J. H. Williams	804,079
Checkrein and holder for same, A. E. Fisher	803,683
Cheese cutter, W. E. Burks	803,807
Cheese cutter, W. R. Montgomery	804,153
Cheese cutter computing device, H. F. Dunn	803,997
Chuck, P. F. Krug	803,604
Chuck for grinding joint rings, W. A. Davidson	803,812
Chuck, lathe, W. C. Briggs	803,984
Chute, E. Roenius	804,048
Cigar cutter and match lighter, combined, W. F. Herdrich	803,758
Cigarette machine, B. Cohen	803,993

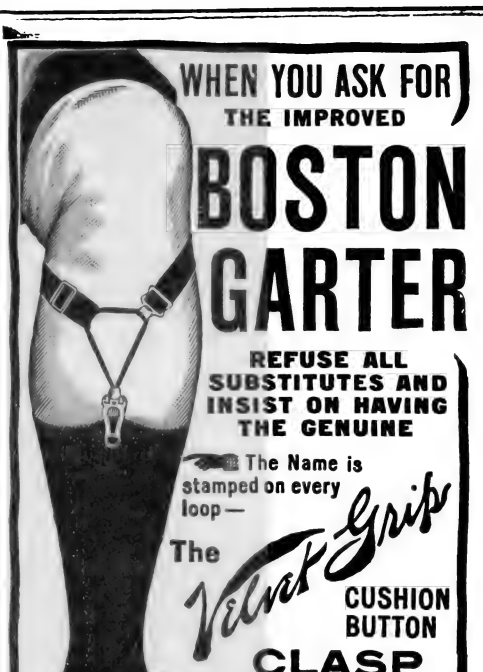

WHEN YOU ASK FOR THE IMPROVED

BOSTON GARTER

REFUSE ALL SUBSTITUTES AND INSIST ON HAVING THE GENUINE

The Name is stamped on every loop—

The Velvet Grip CUSHION BUTTON CLASP

LIES FLAT TO THE LEG—NEVER SLIPS, TEARS NOR UNFASTENS

Sample pair, Silk 50c., Cotton 25c. Mailed on receipt of price.

GEO. FROST CO., Makers Boston, Mass., U.S.A.

ALWAYS EASY

KLIP-KLIP

"DUO"

MANICURE-CIGAR CUTTER

A blade for each purpose.

25c By Mail

Worth its weight in gold

A Perfect manicure. A Sanitary Cigar Cutter.

Klip-Klip "Duo" (two in one) has a sharp steel clip, file and cleaner. Keeps the nails in perfect condition. Also a separate blade which cuts cigars quick and clean. It is sanitary. Physicians say everyone should use his own cigar cutter. It is light, compact and handsomely finished and sells at sight. Two combined for one price. At all dealers or mailed upon receipt of 25c. The "original" German silver Klip-Klip (manicure only)—same price. Your money back if you want it.

MANUFACTURED ONLY BY THE

KLIP-KLIP COMPANY

556 Clinton Ave., S., Rochester, N. Y.

ROAD BUILDING MACHINERY AND CONTRACTORS SUPPLIES.

ACME ROAD MACH'Y CO., FRANKFORT, N.Y. U.S.A.

THE SHOREHAM

WASHINGTON, D. C.

The Leading Fashionable Hotel

METROPOLITAN STANDARD OF EXCELLENCE. ABSOLUTELY MODERN AND HIGH CLASS IN ALL DETAIL. AMERICAN AND EUROPEAN PLAN

JOHN T. DEVINE, PROPRIETOR

A Good Profit on Time!

Do you want to make a little money with a little effort?
Yes!
Then send us your name, address, and two references

We will send you a free sample copy of THE FOUR-TRACK NEWS and full particulars of our

Specially Liberal Terms to Agents!

We want your services (if only during your spare time) and we are more than willing to pay you liberally.

EVERYBODY WANTS

The Four-Track News

BECAUSE IT IS

A magazine of Travel and Education
A magazine of Delightful Entertainment
A magazine of Valuable Information
A magazine for the Father and Mother
A magazine for the Boys and Girls
A magazine for Every Intelligent Person

ITS FIELD EMBRACES EVERY NATION ON THE GLOBE

AGENTS MAKE GOOD MONEY EASILY

We would rather have 400 good agents than 4,000 poor ones. Anyone with a little ambition can be a good agent, for THE FOUR-TRACK NEWS is a self-seller. *Do you want to be one of the 400?*

All the agent has to do is show the goods!

It costs you nothing to get full particulars to agents, and a sample copy. Send your address and two references to

GEORGE H. DANIELS, Publisher
Room No. 26, 7 East 42d Street, New York

Before the cold weather sets in

Get a Residence Telephone

It saves exposure.
It saves doctor's bills.
It means convenience and economy.
Rates are low.

NEW YORK TELEPHONE CO.
15 Dey Street

WILLIAMS' SHAVING STICK

The acme of luxury, convenience and economy.

Williams' Shaving Sticks, Shaving Tablets, Toilet Waters, Talcum Powder, Jersey Cream Toilet Soap.

Write for booklet "How to Shave"

THE J. B. WILLIAMS CO.
GLASTONBURY, CONN.

MY BOOK IS FREE

also
$2 Magic Trick Free

This book treats of the fascinating art of the magician as a **Social Accomplishment** and a means of increasing your **Earning Capacity.** The Ansbach Correspondence School of Magic, Incorporated (paid in capital $50,000), is the only institution of its kind in the world. My method of teaching is not an experiment any more. I have taught magic for over thirty years. People of the highest social, professional and commercial standing are, and have been among my students. My book contains their unqualified endorsement. Courses $15 up. Write for illustrated book and free trick before it is too late. Enclose postage.

The Ansbach Correspondence School of Magic, Dept. 9, Hillsdale, New Jersey



Motion Picture
MACHINES and FILMS
STEREOPTICONS and SLIDES

For Public Entertainments, in Theatres, Halls, Show Tents, etc.
Catalogue No. 9 Free

KLEINE OPTICAL CO., 52 State St., Chicago, Ill.

"20th Century Limited"

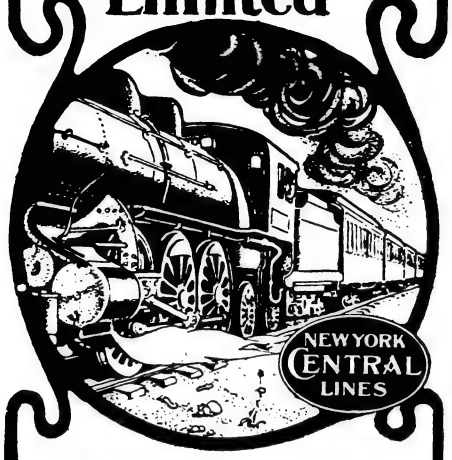

The "20th Century Limited" is the train that makes possible the journey between Chicago and New York without *any* loss of time, leaving *after* the business day is done and arriving *before* the business day begins.

The "20th Century Limited" *is* the finest type of *comfortable* high speed operation in the world, as, also, is it the finest representative in elegance of appointments and the perfect character of equipment.

The best train in America is the "20th Century Limited", *each way, daily, between Chicago and New York in 18 hours.*

Lake Shore – New York Central

For copy of "Book of Trains" or information about your travel matters address the undersigned.

A. J. SMITH, Gen. Pass. Agt., Cleveland, O.
C. F. DALY, Passenger Traffic Manager, Chicago, Ill.

Cigarette machine pasting apparatus, D. J. Campbell	803,986
Circuit breaker, M. B. Field	803,817
Circuit breakers, trip coil for, J. D. Hilliard, Jr.	803,825
Circuit for operating signaling devices, metallic, Andriano & Herbstritt	804,182
Cisterns and cesspools, form for making, E. H. Osborn	804,167
Clamp, W. H. Clendenon	803,668
Clamp for cross rods, metal, J. C. Russell	803,715
Clay cleaning device, H. Diesener	803,563
Clays, revivifying spent, A. B. Latting	804,016
Clearance indicator, W. B. Updegraff	804,178
Clock, electric, L. Agostinelli	804,082
Cloth napping machine, E. H. Marble	803,612
Clothes bag, G. L. Barrett	803,967
Clothes fastener, A. Mathews	803,918
Clutch, friction, de Dion & G. Bouton	804,104
Coke extractor, J. S. Ham	803,586
Coke oven, M. E. Rothberg	804,053, 804,054
Collar, F. Hofmeister	803,594
Collar and necktie fastener, H. Walters	804,075
Colter clamp, E. J. Dooley	804,105
Commode, L. Lotz	804,019
Concrete sewers, device for forming, R. R. Evans	803,680
Concrete walls, device for building, D. A. Milam	803,703
Condenser system, F. Ray	803,787
Control system, C. W. Larson	803,834
Convertible chair, D. T. Matthew	803,699
Conveyer, J. L. Causey	803,667
Conveyer and leer, combined, F. A. Shunk	803,720
Conveyer, spiral, McGrath & McAndrews	803,924
Conveying apparatus, Wallace & Nash	803,944
Cooking apparatus for cans, F. F. Stetson	803,724
Core compound, R. Ditty	803,509
Corn huskers, aligning ear forwarder for, C. E. Curtiss	803,994
Corn popper, Favorite & Schermerhorn	804,110
Corner shield or protector, O. Carlson	803,741
Corset and other articles of counterpart construction, C. M. Frost	803,685
Cotton picking machine, W. B. Edrington	803,572
Coupling, J. & J. O. Timms	803,729
Coupling, J. O. Timms	803,730
Coupling device, H. H. Williams	803,648
Coupling device, D. Miller	803,840
Coupling or union, A. Meyer	804,149
Crate, foldable, E. M. Averill	803,537
Cultivating tool, G. F. Hall	803,583
Cultivator blade, J. S. Harlow	803,899
Cultivator, listed corn, J. B. Proskovec, Jr.	804,171
Curtain holder and adjuster, J. Cook	804,101
Cutter blade, P. F. Bolton	803,804
Cutting and puncning device, J. & J. Evans	804,108
Dialkyl-malonyl-urea, making, F. Mayer	803,774
Display can, J. Schnabel	803,858
Display fixture, shoe, Gruss & Alexander	803,688
Display rack for advertising cards, D. R. Almy	803,960
Ditching machine, M. Brown, Jr.	804,096
Door, grain, J. Siemsen	804,061
Door opening system, electrically operated, W. T. Platt	804,040
Door ventilator, L. Ulrich	803,863
Dough shaping machine, F. Streich	803,862
Draft attachment, C. W. Petre	803,926
Drain pipe seal trap, W. R. Bonnell	803,979
Draining marshes and the like, apparatus for, J. Brants	804,092
Dredging apparatus, R. G. Hanford	803,587
Dress suit case, C. E. Turner	803,732
Drill bit, rock cutting, J. G. Leyner	803,911
Drinking fountain, J. H. Tomlinson	803,731
Dust laying and absorbing composition, B. Singer	803,632
Dye and making same, monoazo, Herzberg & Siebert	803,592
Dyeing indigo resists, J. Ribbert	803,855
Eaves trough, C. Crawford	803,670
Electric apparatus, vapor, A. D. Lunt	803,836
Electric currents into continuous currents, instrument for converting alternating, J. A. Fleming	803,684
Electric generator, direct current dynamo, B. G. Lamme, reissue	12,406
Electric motor control system, C. A. Mudge	804,156
Electric switch, A. E. Handy	803,898
Electrical rosette, G. W. Goodridge	804,114
Electrolytic process using insoluble anodes, A. G. Betts	803,543
Elevated carrier, M. Heus	803,690
Elevator safety device, J. W. Smith, Jr.	803,634
Embroidery frame suspension device, R. Zahn	803,656
Enameling, J. F. Kenkel	804,010
Energy and heat, apparatus for the production of mechanical, G. J. & C. H. Weber	803,735
Envelop, F. Klousnitzer	804,014
Envelop clasp, J. A. Sherman	803,631
Excavating bucket, W. Heffron	803,901
Excelsior wrappers and pads, machine for the manufacture of, H. F. Shadbolt	803,718
Explosion engine, E. T. Pollard	803,623
Eyeglass holder, H. Bick	803,975
Eyeglass lens, W. K. Kight	803,907 to 803,909
Fanning mill, A. V. Cleland	803,558
Feed bag, E. Pyle	803,851
Feeding and delivering articles, O. M. Lissak	804,145
Feeding apparatus, poultry, G. C. Scott	804,057
Fence post, J. M. C. Rentfro	803,789
Fence post, cement, A. Moler	803,615
Fence post, cement, J. K. Purinton	803,785
Fence post, concrete, C. Spiess	803,861
Fifth wheel, W. B. Morgey	803,841
Filling attachment, E. H. Gold	803,893
Filter, J. G. Garland	804,004
Filter, W. Noles	804,161
Fire apparatus brake mechanism, T. F. Troop	804,071
Fire escape and water tower, combined, Schwarz & Bryant	803,717
Firearm, automatic, W. J. Whiting	803,948
Firearm sighting attachment, W. P. Shattuck	803,791
Firearm trigger arrangement, S. Turudija	803,644
Fireplace and stove, combined, W. A. Douglass	804,106
Fireproof door, self-closing, R. D. Mumford	803,618
Fish rods, device for holding, W. J. Walton	803,646
Fishing reel, E. D. Rockwell	804,047
Floating device, L. Ledermann	803,910
Floors, construction of fireproof brick, O. Cracoanu	803,559
Flue cleaner, G. W. Dean	803,562
Fluid motor, J. Hofmann	803,595
Fluid pressure brake, M. F. Volkmann	803,943
Fluid pressure controller, Furbeck & Carver	803,686
Foot warmer, C. H. Boeck	803,545
Fountain. See Drinking fountain.	
Fruit clipper, C. F. Streight	803,796
Fuel economizers, tube scraper driving mechanism for, E. B. Freeman	803,578
Fuel feeding apparatus, J. F. de Navarro	804,158
Fuel, feeding pulverized, E. J. Neville	804,160
Furnace, E. G. Germer	803,581
Furnace doors, gates, etc., device for operating, J. S. Hood	803,597
Furnace flue dust, utilizing, S. B. Sheldon	803,792
Furnaces, reversing valve for smelting and other, R. Schneider	803,628
Furniture, Andrews & Schustek	803,961
Furniture, post office, M. S. Field	803,575
Fuse plug, electrical, G. B. Thomas	804,070
Gage, H. W. Stowe	804,067
Gaging machine, automatic, O. M. Lissak	804,017
Game counter, T. S. Ford	803,577
Garment, J. M. Van Orden	803,733
Garment supporter clasp, F. A. Stickel, Jr.	803,637
Gas apparatus, acetylene, F. M. Moore	803,617
Gas burner, incandescent, J. Mallol	803,771
Gas, generating, C. H. Claudel	803,557
Gas generator, acetylene, J. W. Featherstone	803,999
Gas light, T. Maguire	803,837
Gas mantle, incandescent, C. M. Lungren	803,835
Gas mantles, repairing incandescent, C. M. Lungren	803,915
Gate, G. S. Buck	803,547
Gate, J. G. Hibner	803,691
Gearing, transmission, C. E. Neal	803,845
Gearing, variable speed, L. Megy	803,701
Glass articles, machine for making, A. Raspillaire	804,173
Glass molding machine, A. Strub	804,069
Glasses, filling device for, J. F. Christin	803,879
Gluing machine, F. J. Heybach	803,760

A JAPANESE VICTORY

JAPANESE STRATEGY—THE FLANK ATTACK
against the *individual* or an army—and the ever successful

Capt. SKINNER tells how BRAINS and SKILL will always overcome mere Brute Force.

Application of the Unexpected revealing **All the Secrets of Jiu-Jitsu** **The Wonderful Japanese Method**

of attack and self-defense, by which the WEAK defeat the STRONG. The complete course in one volume, by Capt. Harry H. Skinner, 12mo. cloth, nearly 100 photo-illustrations. By mail, **$1.00**

BOY TAKING A FALL OUT OF A BIG BULLY

CAPT. SKINNER'S BOOK is the OFFICIAL TREATISE of this wonderful system. It has been selected by the Navy Department at Washington for instruction of the crews on our War Vessels, and orders have been issued by the Government Authorities at Washington to have this Book placed in all the libraries. It is now used by the Officers and men of the U. S. Army and Navy as well as the Police Departments of New York, London and other large cities.

President Roosevelt, our most distinguished exponent of **Jiu-Jitsu,** says the art is worth more in every way than all of our athletics combined. – *Review of Reviews.*

THE U. S. GOVERNMENT has adopted this Science as a part of the instruction at Annapolis Naval Academy and West Point Military School.

JIU-JITSU, by Capt. Skinner, described with simple eloquence, enriched with many photographs from life. Handsomely printed.—*New York American.*

JIU-JITSU—Capt. Skinner gives clear, careful explanations of all the various positions.—*N. Y. World.*

Capt. Skinner's book is a comprehensive work in letterpress and pictures of this remarkable science.—*Tribune.*

The reading of this book is all that is necessary to make any man, woman or boy master of all the secrets of JIU-JITSU.

The third edition of this remarkable book also contains the 18 physical culture or "set up" exercises in use in the armies and navies of all the civilized powers.

JAPAN PUBLISHING COMPANY, Dept. E, American Tract Society Building, NEW YORK, N. Y.

THE "LEADER"
1½ H.P. Gasoline Auto-Marine Engine



Built like a watch. Beautifully Finished. Accurately Constructed. Light, Strong, Reliable and Noiseless in operation. Suitable for launches from 15 to 19 feet in length. Price complete, $75.00 net, no discount. Thoroughly guaranteed. Perfect Speed Control. Complete descriptive catalogue upon application.

MANUFACTURED BY
CLAUDE SINTZ,
92 S. Front St., Grand Rapids, Mich.

They Make Bad Roads Good

No slipping or skidding of wheels on any kind of conveyance if fitted with
WEED'S TIRE GRIPS
which ensure steady traveling. Can be carried in any car. Occupy but little space. Easily adjusted. Anyone can apply them. Protects occupants of car from flying mud, etc. Indispensable in wet weather. Send for free descriptive booklet S.

WEED CHAIN TIRE GRIP CO., 28 Moore St., N. Y. City



Send the Name of Your Car or engine, and we will send full information about the **Apple Automatic Sparker.** The best storage battery charger for automobile, launch or gas engine. Address,

The Dayton Electrical Mfg. Co.
98 Beaver Bldg. Dayton, Ohio.

The Wonderful **"AUTO-MARINE MOTOR"**



$37.50
ENGINE ONLY

Weight 57½ lbs.
Height 11¼ in.

Convert Your Row Boat Into a LAUNCH

Rated at 1 h. p. Has shown nearly 2 h. p. No valves, gears, springs or cams. Jump spark. Reversible. Speed control. Only three moving parts. Could not be made better if it cost five times as much. **ORDER NOW**—they are selling so fast you may be disappointed later.

Auto-Marine Motors from 1 to 20 h. p.

Detroit Auto-Marine Co., 75 E. Congress St., Detroit, Mich.
Formerly Detroit Lackawanna Co.



DO YOU USE GRINDSTONES?

If so we can supply you. All sizes **mounted** and **unmounted,** always kept in stock. Remember, we make a specialty of selecting stones for all special purposes. *Send for catalogue "I"*

The CLEVELAND STONE CO.
2d Floor, Wilshire, Cleveland, O.

America's Foremost Reference Work

is built on a new plan. It is essentially different from the English encyclopædias and from previous so-called "American" works of an encyclopædic nature.

Realizing that the interests of American citizenship now extend to every country and every department of Commerce, Art and Science on earth, the publishers of

The New International Encyclopaedia

have made it WORLD-WIDE IN ITS SCOPE.

Every important city in the two hemispheres is graphically described. Every celebrated place, every famous building, every eminent character in every quarter of the Globe is treated clearly and in a manner that interests beyond description.

The Literature of all Nations, their Sciences, Arts, Commerce and Professions—even the simple subjects of every-day life—have their proper place in this work **because it is truly "international."**

The New International holds all that an Encyclopædia can hold from 5000 B. C. DOWN TO TO-DAY.

AT LAST—AN INTERESTING ENCYCLOPÆDIA

At last the New International's publishers have produced an Encyclopædia that is not "dry" or "tiresome."

Its language is vivid, stirring and impressive to the mind and memory; and it is this departure from the old-time dullness of style that makes "The New International Habit" grow so rapidly on reader or student.

HOW MUCH DO YOU KNOW? A BOOK FREE

Do you realize that you probably cannot answer hundreds of important questions that are likely to arise daily? We have prepared a "Question Book" to show you how many of these there are. The price of this book is 25 cents, but we will send it FREE at your request.

OUR SPECIAL HOLIDAY OFFER

The Holidays are approaching and it is well to prepare for them. If you are interested in our Holiday Offer concerning the New International, write us at once. The coupon attached will bring you all the particulars.

DODD, MEAD & CO.
372 Fifth Avenue, New York, N.Y.

FILL IN NAME AND ADDRESS AND SEND THIS COUPON

DODD, MEAD & CO., Publishers, 372 Fifth Avenue, New York
Please send to me, without cost, your handsome 80-page book of descriptions of the NEW INTERNATIONAL ENCYCLOPÆDIA, specimen pages, colored illustrations, maps, etc., and all information regarding your Special Holiday offer, price and easy terms of payment. Also send 25-cent Question Book.

NAME.....
OCCUPATION.....
STREET.....
POST OFFICE.....
STATE.....
Sci. Am. 17

Jaeger UNDER WEAR

Prevention is better than cure and the best preventive of coughs and colds and their allied evils is

Jaeger Underwear.

Physicians Everywhere Recommend It

Catalogue explains everything. Free, with samples

Dr. Jaeger's S. W. S. Co.'s Own Stores
New York: 306 Fifth Ave., 157 B'way. Brooklyn: 504 Fulton St. Boston: 228 Boylston St. Philadelphia: 1510 Chestnut St. Chicago: 82 State St.
Agents in all Principal Cities.

Road Freighting Traction Engines

Over 200 in use on Pacific Coast alone. Siberia, Spain, India, Central America, Sandwich Islands have them.

Engines 110 Horse-power. Wood, Coal, or Oil burning. Hauls 50 tons, takes grades 5 to 25 per cent. Capacity each car 16 tons.

THE BEST MFG. COMPANY
San Leandro, California

Cable Address, DANBEST. Codes, Western Union and McNiel. *Write for our New Catalogue No. 18*



Avoid the Vibration!

There are no jolts or rebounds under either light or heavy loads in your Motor Car if it be fitted with the **Supplementary Spiral Spring** which adds comfort, safety and pleasure to motoring. Saves springs tires and engine. State make and model of car.

SUPPLEMENTARY SPIRAL SPRING CO.
4529 Delmar Ave., St. Louis, Mo.
Eastern Agents, AUTO COVER AND TOP MFG. Co., 148 W. 56th St., N. Y. City.

FIRE PROTECTION
AT LOWEST COST

Save Your Fire Losses. Our Extinguisher is cheapest and best made. Send for Booklet and full particulars. It's to your interest.

THE FIRE DUST CO.
National Bank of Commerce Building, St. Louis, Mo.
Agents wanted throughout United States and foreign countries.

Schwartz Furnace
FOR MELTING GRAY IRON, STEEL, COPPER, BRASS AND BRONZE
Send for Catalogue
HAWLEY DOWN DRAFT FURNACE CO.
NEW YORK, N. Y. CHICAGO, ILL.

WARREN'S
NATURAL ASPHALT SAND SURFACED
ROOFING
Apply it yourself. Makes a finished gravel roof. Comes ready to lay in rolls of 108 square feet. Write for sample, circular and prices. **Warren Chemical and Mfg. Co., 18 Battery Pl., New York**

WELL DRILLING Machines
Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.
WILLIAMS BROS., Ithaca, N. Y.

NEW YORK SCHOOL OF AUTOMOBILE ENGINEERS
(INCORPORATED)
146 West 56th Street, New York City
A HIGH GRADE SCHOOL OF INSTRUCTION FOR CHAUFFEURS AND AUTOMOBILE OWNERS
Day and evening classes. Now enrolling students Write, call or phone for particulars. Tel. Columbus 4314

THE HANNA MFG. CO.
Engineering Instruments
382 River Street, Troy, N. Y.
Illustrated Catalogue on Application

ICE BOATS!
If you want to know how to make an Ice Boat, buy SCIENTIFIC AMERICAN SUPPLEMENT **1536.** Complete working drawings and a thorough description are published. Order from your newsdealer or from **Munn & Co., 361 Broadway, New York**

Gold saving apparatus, W. D. Baney	803,868
Grain cleaner, A. Kammerloher	803,905
Grain drills, speed-changing mechanism for, H. J. Case	803,554
Grain separator chaffer attachment, A. D. Dusenbery	803,5.9
Gun sight, combination, Bassell & Blenkner	803,97[illegible]
Gun sight, globe, Bassell & Blenkner	803,969
Hammer, pneumatic, A. J. Patch	803,621
Harvester, pea and clover, J. Guelig	804,117
Heat retainer and making the same, C. H. Boeck	804,090
Heater, C. H. Boeck	804,184
Heating device, electric, G. E. Stevens	803,795
Heel compressing machine, boot and shoe, J. V. Collier	803,744
Hoisting apparatus, P. J. Fahey	803,681
Holding attachment, C. Benedict	803,974
Hook, A. Mills	804,024
Horse bonnet, C. S. Moore	803,616
Horse releaser, A. Straka	804,068
Horseshoe, C. A. Campbell	803,985
Horseshoe, A. H. Squier	804,063
Humidifier, J. Hase	804,120
Hydrosulfite preparations, making, R. Muller	804,157
Ice cream disher, Keiner & Williams	803,906
Ice cutting machine, I. Boyd	804,091
Ice melting apparatus, H. C. Reichardt	804,042
Incandescent mantle, A. I. Van Vriesland	803,798
Insulated rail joint, R. W. Smith	803,793
Insulating material, W. L. R. Emmet	803,816
Insulator, G. M. Bemis	803,973
Insulator, electrical, G. W. Goodridge	804,115
Ironing board, L. M. Darrow	803,672
Ironing board, H. Wright	803,954
Ironing the edges of collars and cuffs, machine for, W. C. Cunningham	804,102
Jack and truck, combined, O. F. Landberg	804,015
Jar cap, fruit, W. P. Coldren	803,743
Jar neck and closure, A. Smelker	803,932
Journal, interchangeable, J. H. Ostrander	804,030
Key guard, W. R. Breniman	804,093
Key ring, A. H. Merrill	803,839
Kiln. See Rotary kiln.	
Kitchen table, Blanc & Mitchell	804,089
Kitchen, window, I. M. Thompson	803,938
Knife, E. Blomseth	803,978
Knife switch, B. M. Graybill	803,895
Labeling machine, C. Otting	804,168
Ladder, step, Pfeifer & Steele	803,783
Lamp, R. M. Dixon	803,884
Lamp mantles, means of suspending incandescent, C. M. Lungren	803,913, 803,914
Lamp shade holder, incandescent, J. H. Dale	803,883
Lamps, bracket arm for incandescent electric, H. L. Getz	803,819
Lamps, globe lift for wall, D. C. Kline	803,602
Lard compounds, apparatus for bleaching, J. N. Humphreys	804,129
Last, darning, W. G. Flexon	803,818
Lathe steady rest, H. S. Johnson	804,131
Lead by electrolysis, apparatus for refining, A. G. Betts	803,544
Lens clamping device, J. H. Starbuck	803,794
Leveling instrument, E. M. Low	803,770
Life preserver, W. H. Humphrey	803,828
Lifting jack, C. E. Roth	804,052
Light box, C. M. Olin	804,163
Limb, artificial, H. J. Morris	803,922
Lime, hydrating, J. G. Jones	803,904
Linotype machine, J. R. Rogers	803,928
Linotype machine, P. T. Dodge	803,996
Liquid discharging tank, T. L. Smith	803,772
Loader, J. C. Mire	804,026
Lock, G. K. Glenn	804,113
Locomotive boiler, S. A. Reeve	803,788
Locomotive, compound, F. W. A. von Borries	803,981
Logotype machine, J. R. Rogers	804,049, 804,050
Loom for weaving pile fabrics, A. Heald	804,123
Loom jacquard mechanism, H. Gerber	803,891
Loom pattern chain mechanism, B. F. McGuiness	803,844
Loom shuttle box motion, H. Bardsley	803,869
Looms, filling exhaustion indicating mechanism for, Wood & Northrop	803,654
Lubricator, F. W. Leidecker	803,609
Lubricator, J. T. Pedersen	804,033
Macadam and preparing same, tar, E. P. Hooley	803,902
Mail bag catcher, P. S. Perry	804,035
Mail delivery apparatus, B. W. Harris	803,900
Mail distributing apparatus, W. Barry	803,968
Mail marking machine, J. B. Young	803,955
Malting apparatus, J. F. Dornfeld	803,675
Manure spreader, detachable, L. E. Francis	804,003
Marking or tracing device, P. F. Limacher	803,757
Massaging implement, A. U. Patchen	803,708
Match making and boxing machine, G. A. Barnes	803,538
Match splint cutting and sticking machine, W. E. Williams	803,649
Matrix former, approximal, R. M. Chase	804,099
Mattress, spring, F. J. Maier	804,020
Measurements, instrument for making electrical, J. A. Fleming	804,190
Measuring the length of electric waves, apparatus for, J. A. Fleming	804,189
Mechanical movement, A. Dina	803,565
Metal and concrete construction, C. L. Raymond	803,852
Meters, device for use in connection with velocity, E. S. Cole	803,880
Milk cooler, P. L. Stein	803,636
Mixing machine, H. C. Chambers	803,555
Mixing substances together in regular proportions, apparatus for, T. H. D. May	804,022
Mixing vessel, J. F. Lamb	803,833
Molding apparatus, W. P. Meeker	803,700
Mop head, E. O. Loeber	803,769
Mordanting with magnesium compounds, W. Warr	803,647
Motor operated switch, W. E. Laird	803,832
Mower pitman, G. B. Hawkins	804,121
Music leaf turner, G. S. Budge	803,548
Music stand, A. Krauth	803,831
Musical instrument touch regulator, W. Rohlfing, Jr.	804,051
Necktie holder, J. M. Gwin	803,896
Oiler, W. L. Howland	804,009
Orchard heater, Brown & Bremiller	803,662
Ore concentrator, J. J. Kennedy	803,830
Ore crushing machine, G. Johnston	803,903
Ores, etc., treatment of iron, C. Ellis	803,886
Ornament, R. Burger	803,875
Oxids of nitrogen, means for producing, Marquardt & Viertel	804,021
Pantaloons stretcher, S. F. Cary	803,808
Paper clip, J. B. Hale	803,585
Paper feeding machine, B. Gustafson	803,582
Paper holder, toilet, C. E. Pope	803,624
Paper perforator or punch, A. Tengwall	803,727
Pattern forming machine, hollow, F. A. Voelke	803,799
Pea hulling machine, W. C. Combest	803,809
Pearls, etc., manufacture of artificial, P. E. L. Perdrizet	804,034
Peat machine, T. H. Leavitt	803,608
Pen feed, fountain, W. A. Welty	803,866
Pen, fountain, E. Reisert	803,927
Pen, ruling, H. Kern	804,011
Pencil sharpener, W. B. Hopkins	803,762
Petroleum burner, S. Carlson	803,553
Photographic plate or film, G. N. Pifer	804,039
Photographic process and product, G. N. Pifer	804,038
Piano action, O. Glatt	803,752
Pianos, manually or mechanically operated, J. Hattemer	803,757
Pianofortes, device for leveling the keys of, E. Werner	803,946
Pick and ax, prospector's, J. McMahon	803,620
Pile fabric, E. Cattlow	803,990
Piling, wood sheet, A. Lanquist	803,697
Pipe connecting member, J. D. Tschopik	803,940
Pipe coupling, J. A. Grotewohl	803,687
Pipe coupling, train, E. E. Gold	804,005
Pipe expander, S. E. Allen	803,959
Pipe joint, lead and iron, F. E. Baker	803,738
Pipe wrench, J. H. Vinton	803,942
Planing machine work guide, L. A. Winters	803,736
Planter, H. D. Guffey	804,118
Planter and fertilizer dropper, potato, R. Thompson	803,728
Planter, corn, W. H. Sandifur	804,055
Plow, shovel, R. L. Burnett	803,549
Poison distributer, P. Brandt	803,661
Polisher, collector, O. Zschockelt	803,657
Post. See Fence post.	
Potato digger, J. B. Peters	804,036
Power driving mechanism, J. A. Charter	803,556
Power mechanism, P. Adams	803,958
Power transmission apparatus, fluid pressure, J. W. Hall	803,584

To whichever class of automobile enthusiast you belong—expert or novice—a ride in a

Peerless Direct Drive Motor Car

and an explanation of its wonderful working points is bound to open your eyes.

An actual examination of the Peerless, and *a comparison of it with all other cars* will prove more decisively the many points of Peerless superiority than any number of long advertisements can do.

Of course our catalogue describes these features, and we will be glad to send you a copy. We will send also, if you desire, a letter of introduction to our nearest agent, arranging for a demonstration. It is the Peerless' past achievments and its present unmatched principles and workmanship that put it ahead of any other car built.

THE PEERLESS MOTOR CAR CO., 38 Lisbon St., Cleveland, Ohio
Member A. L. A. M.



Just Published

The Scientific American Boy

By A. RUSSELL BOND

12mo. 320 Pages. 340 Illustrations. Price $2.00 Postpaid

THIS is a story of outdoor boy life, suggesting a large number of diversions which, aside from affording entertainment, will stimulate in boys the creative spirit. In each instance complete practical instructions are given for building the various articles.

¶ The needs of the boy camper are supplied by the directions for making tramping outfits, sleeping bags and tents; also such other shelters as tree houses, straw huts, log cabins and caves.

¶ The winter diversions include instructions for making six kinds of skate sails and eight kinds of snow shoes and skis, besides ice boats, scooters, sledges, toboggans and a peculiar Swedish contrivance called a "rennwolf."

¶ Among the more instructive subjects covered are surveying, wigwagging, heliographing and bridge building, in which six different kinds of bridges, including a simple cantilever bridge, are described.

¶ In addition to these, the book contains a large number of miscellaneous devices, such as scows, canoes, land yachts, windmills, water wheels and the like. A complete table of contents sent on request.

MUNN & COMPANY
361 Broadway PUBLISHERS OF "SCIENTIFIC AMERICAN" New York City

WINCHESTER

RIFLES FOR ALL KINDS OF HUNTING.

Winchester Repeating Rifles shoot as accurately and work as surely in the arctic and tropical regions as they do in the temperate zone. The severest climatic conditions do not impair their reliability. For this reason, well-posted sportsmen, when leaving the beaten trails in search of rare game, always carry a Winchester in preference to any other rifle. Winchester Rifles and Winchester Cartridges are made one for the other.

FREE: Send name and address on a postal card for our large illustrated catalogue.

WINCHESTER REPEATING ARMS CO., - - - NEW HAVEN, CONN



GAS ENGINE GENERATOR

STEADY LIGHT FROM AN ORDINARY GAS OR GASOLINE ENGINE

Not a makeshift, but a specially designed machine with bearings amply heavy to support balance wheel without a third bearing. Write for Bulletin 152

ROCHESTER ELECTRIC MOTOR CO.
10-12 Frank St., ROCHESTER, N. Y.

"STANDARD"

Two-Speed Automatic Coaster Brake Hub

Makes wheeling a delight, eliminates the drudgery. Do not waste money on experiments when you can buy a perfect attachment *all in* one hub. Our little booklet tells all about it and is mailed free. Write to-day.

THE STANDARD COMPANY - - - - Torrington, Conn.

American Estates and Gardens

4to. 11x13½ inches. Illuminated Cover and 275 Illustrations. 340 Pages. Price, $10.00

By BARR FERREE

Editor of American Homes and Gardens, Corresponding Member of the American Institute of Architects and of the Royal Institute of British Architects

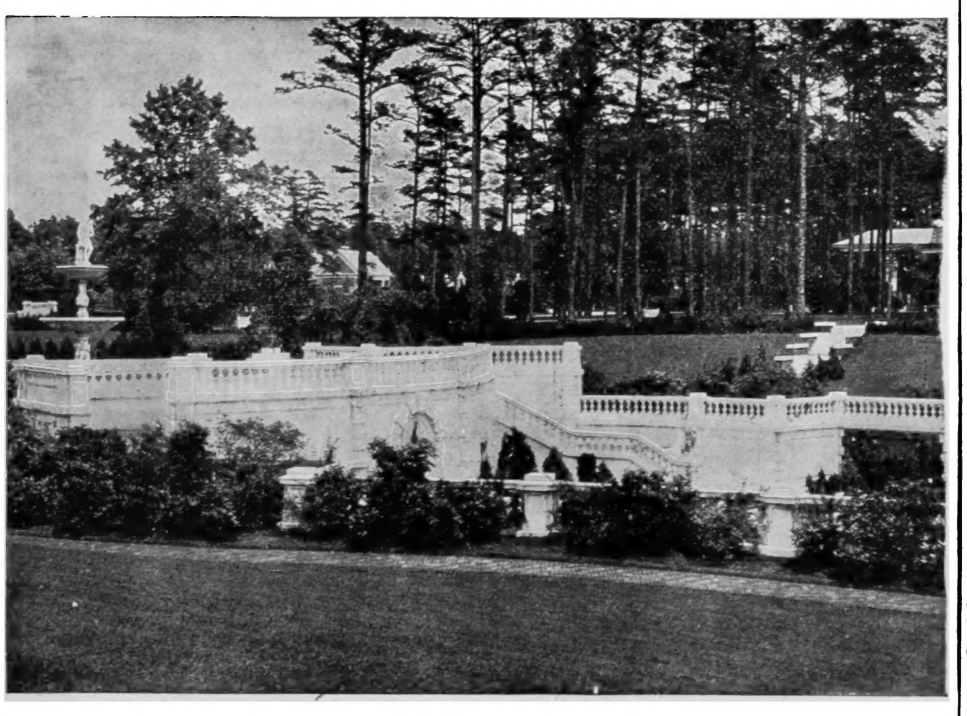

A SUMPTUOUS book dealing with some of the most stately houses and charming gardens in America. The illustrations are in nearly all cases made from original photographs, and are beautifully printed on double coated paper. Attractively bound. This book will prove one of the most interesting books of the season, and will fill the wants of those who desire to purchase a luxurious book on our American homes. An illustrated prospectus mailed free on request.

MUNN & COMPANY

Publishers of "Scientific American"

361 Broadway, New York

Power transmission device, G. A. Cutter	803,811
Pressure gage, mercury, H. C. Ramsberger	803,786
Printed surfaces having relief appearance, producing, C. H. Mackenzie	804,195
Printing plate holder, C. F. Rockstroh, reissue	12,404
Printing press, E. H. Ahlander	804,181
Propeller, marine, C. G. Curtis	803,671
Propeller, reversing, E. B. & L. S. Cushman	803,560
Pruning implement, G. B. Wright	803,953
Pulley, L. S. Lachman	803,605
Pulp grinding machine, wood, B. Kihlgren	804,012
Pump and the like, rotary, F. Marburg, Jr.	803,772
Pump, electric, J. C. Stokes	803,936
Pump for molten metal, H. C. Hansen	803,588
Punching and shearing machine, C. A. Bertsch	803,660
Quicksilver trap, P. Somerville	803,934
Rail clamp, J. Murray	803,776
Rail joint, G. J. Walsh	804,074
Rail joint chair, W. B. Davis	803,813
Rail or other joint, W. J. Huckabay	804,127
Railway and tramway carriages, etc., step of, J. G. Robinson	804,046
Railway couplings, manufacture of draw heads for, W. L. Jacoby	803,764
Railway, pleasure, E. S. Ensign	803,679
Railway rail, E. C. Geneux	803,589
Railway signaling apparatus, automatic electrical, A. H. Binyon	803,976
Railway switch stand contact box, W. J. Hughes	803,827
Railway switching and signaling apparatus, W. K. Howe	804,126
Railway tie, E. C. Lawton	803,766
Railway tie, G. T. Murphy	803,775
Railway tie, J. R. McFall	803,923
Railway tie, J. Whitehead	804,078
Railway tie, R. M. Orr	804,166
Railway tie, composite, H. J. Fixmer	803,751
Railway tie, metal, J. Warren	803,864
Railway tie, metallic, R. H. Lutz	803,611
Railway tie, metallic, A. M. Baird	804,084
Railway torpedo, C. E. Beckwith, reissue	12,396
Railway vehicle brake apparatus, C. Luyers	803,917
Railways, system of automatic signaling for electric, F. Townsend	804,176
Railways, tramways, etc., signaling on, J. Brown	803,872
Refuse burner, F. G. Wiselogel	803,659
Register bell mechanism, A. H. Woodward	803,655
Rice, preparing, Johnson & Lock, reissue	12,398
Roll coupling box, Millhizer & McQuiston	804,023
Rolling mills, bearing for the rolls of, J. T. Horner	803,763
Rolling sheet and tin plate, apparatus for, P. E. Donner, 803,567, 803,568, 803,673, 803,674,	803,745
Roofing package, H. M. Reynolds	803,713
Rotary engine, Jungersen & Fogh	803,599
Rotary engine, W. M. Hoffman	803,693
Rotary engine, G. A. Kelly	804,134, 804,135
Rotary engine, Ober & Dugar	804,162
Rotary kiln, W. R. Warren	804,076
Roundabout, H. S. Maxim	804,147
Roving machine flier, M. Campbell	803,666
Rowlock, C. A. Wood	803,951
Safe, H. C. Stockwell	803,638
Safety hook, F. Sherkel, Jr.	804,175
Sash fastener, window, M. J. Carter	803,742
Sash weight, E. B. Smith	803,633
Sash weight, sectional, N. A. Petry	804,037
Sausage stuffer, S. Ressler	803,854
Saw filing machine, C. E. Grover	804,192
Saw guide, B. F. Huffman	804,128
Saw handle, crosscut, W. Kronenwetter	804,139
Saw, scroll, A. Jones	803,694
Sawing machine, band, Meyers & Frost	803,702
Sawing machine, portable, G. F. Wallace	804,073
Scale, pitless wagon, D. M. Orcutt	804,165
Scale, weighing, D. M. Orcutt	804,164
Screen sizer and separator, submerged, J. M. Callow	803,550
Screen slide, extension, A. M. Mix	804,152
Screw, electrical binding, W. Kaisling	804,133
Sealing rings with wax, feed mechanism for machine for coating, G. D. C. Coddington	804,100
Seat. See Car seat.	
Separator sieve, W. C. Black	803,977
Shade and curtain holder, J. O. Kridelbaugh	803,765
Shaft, obturator for flexible, A. E. Guy	803,755
Shaping machine, I. J. Shifley	803,859
Sharpener, scissors, W. A. & J. Harvey	803,689
Shearing machine, plate, P. Evans	804,109
Shoestring fastener, G. C. Adams	803,957
Shovel and poker, combined, J. W. Maxwell	804,148
Sign, G. J. Frey	803,750
Signal controlling device, self-restoring, E. W. Vogel	804,180
Sink strainer, E. S. Duffy	803,814
Skate, J. E. Martin	803,698
Slimes, etc., containing gold, silver, and other values, treating ore, L. J. Drabek	804,186
Slimes, treating anode, E. F. Kern	803,601
Smelting furnace, ore, R. Baggaley	803,737
Snow plow, H. Grimes	803,820, 803,821
Socket wrench, C. K. Hill	803,692
Sofa and bed, combination, G. E. Holmes et al	803,826
Soles, machine for cutting block, G. Quarmby	803,710
Spade attachment, E. C. Jewett	804,130
Speed-changing device, S. C. Schauer	803,627
Speed-changing device, G. A. Cutter	803,810
Speed mechanism, change, Baxter & Caley	803,971
Speed mechanism, variable, E. Hill	803,593
Speed mechanism, variable, D. E. Sweetser	803,937
Spindle tube, S. Sharp	803,929
Spinning machine, M. Campbell	803,551, 803,664
Spinning or twisting machine, M. Campbell	803,665
Spring, F. P. D'Arcy	803,561
Spring clip, J. B. Hale	803,897
Spring cushion, W. R. Smith	803,932
Square, carpenter's and joiner's folding, W. Steers, Sr.	803,727
Stamp separator, C. J. Fancher	803,57
Steam and water heater, C. F. Paul, Jr.	804,03
Steam generator, C. Renard	804,04
Steam, utilizing exhaust, L. P. Burrows	804,09
Steamboat, J. Lockwood	803,76
Steel and other metals, apparatus for making, E. C. Wills	804,08
Stirrup, Kellner & Turner	803,69
Stirrup, F. W. Bantz	803,740
Stock-releasing device, B. Teal	803,726
Stoker, mechanical, E. McConnell	803,774
Stoker, mechanical, M. B. Brewster	803,865
Stove, Lindemann & Zweck	803,610
Stove and furnace, W. H. Burns	804,097
Stove attachment, cooking, B. Eger	804,107
Stove cut-off, gas, C. Bargamin	803,965
Stove, gas, A. Verwey	803,754
Stove, soft coal base burning, E. J. Lahan	804,140
Surgical apparatus for internal examination, J. C. Zubli	803,956
Switch, G. Bertold	803,542
Syringe, C. J. Tagliabue	803,640
Table. See Billiard table.	
Table support, V. C. Luppert	803,916
Tambouring apparatus, A. L. Veluard	804,072
Tapping attachment, G. H. Hollm	803,596
Target trap, J. P. Leggett	804,143
Telegraphic sounder, F. H. Miller	803,704
Telegraphy receiving stations, induction transformer for wireless, E. Ducretet	803,569
Telephone exchange system, H. G. Webster	804,077
Telephone holder, C. H. Borden	803,980
Telephone night-watch system, W. Geckler	803,890
Telephone switchboard apparatus, T. V. Davis	804,103
Telephone system, W. A. Robinson	803,856
Telephony, F. W. Dunbar	803,676
Telescopic case or box, C. W. Barnes	803,966
Thermal protector, self-soldering, F. B. Cook	803,881
Thermometer, C. J. Tagliabue	803,639
Thread guide, X. Bossart	803,982
Tickets, etc., automatic delivery apparatus for, N. Klein	804,013
Tickler, J. B. Perrine	803,709
Time recorder, W. I. Follett	803,888
Time recorder, watchman's, J. Summers	803,797
Tire, armored, C. W. Caterson	803,989
Tire, cycle, A. S. Allen	803,658
Tire, pneumatic, A. S. Allen	803,659
Tire, pneumatic, M. H. Blakeslee	804,088
Tire shrinker and jack, Horner & Buck	804,125
Tire, vehicle, H. Lutz, reissue	12,402
Tobacco, removing nicotin from articles made of, A. Falk	803,887

LOFTIS SYSTEM

DIAMONDS ON CREDIT

For Christmas Presents.

Why give a cheap ordinary Present, when, with five or ten dollars for first payment you can give a beautiful Diamond Ring or High Grade Watch?

The **Famous Loftis System** enables you to do this. Write for details. **Our Big Christmas Catalogue** is a veritable Gold Mine of beautiful Christmas Gift Suggestions, with its aid you can select appropriate Presents for both young and old, 1000 handsome illustrations. *Write today for a copy. Don't delay, write today.*

LOFTIS BROS & CO. ESTD 1858

Diamond Cutters WATCHMAKERS JEWELERS

Dept. M180, 92 State St. CHICAGO, ILL., U. S. A.

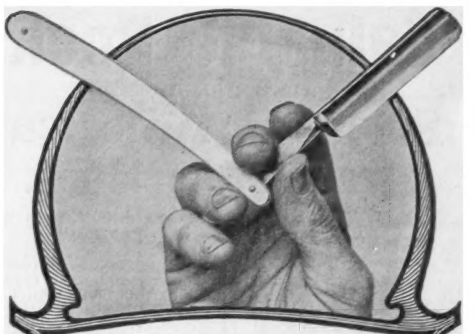

How's Your Razor?

Does it pull a little?

There's no excuse for it. With the Torrey Book to tell you how and a Torrey Strop to do the work, you can keep any razor in perfect condition. The

TORREY STROP

is more than a piece of softened leather. It is so treated that a few strokes will give to your razor an edge that will cut a hair at a touch. No other strop will sharpen a razor so well.

You can get a Torrey for 50c, 75c, $1.00, $1.50, $2.00, and $2.50.

Sent postpaid if your dealer cannot supply. Money refunded or a new strop if not satisfactory.

Torrey's Oil-Edge Dressing will keep any strop soft and pliable. Price 15c at dealers or mailed on receipt of price. Catalogue containing valuable information free.

J. R. Torrey & Co., P. O. Box 34, Worcester, Mass.

METAL POLISHES.—FORMULAS FOR Putz Pomades, Pastes, Liquids, Powders and Soaps, for polishing metals, are contained in SCIENTIFIC AMERICAN SUPPLEMENT Nos. **1283, 1288 and 1289.** Price 10 cents each from this office and all newsdealers

Washburne's Patent

"O.K." PAPER FASTENER

The "O.K." Paper Fastener is the only fastener which, **when attached, stays attached, yet is detachable without injury to the paper or the Fastener, and is easy to apply and remove.** They are always ready for use and require no machine for putting them on or taking them off, **and they always work.** Put up in brass boxes of 100 Fasteners each ten boxes to a carton. **Price 20 cents a box; $1.50 per 1000.** Made in 3 sizes. At all stationers or from the Manufacturer, postage or express prepaid. **Sample box, assorted, 10c.** Illustrated Booklet free.

JAS. V. WASHBURNE, Mfr.
210 E. Genesee St., Syracuse, N.Y.

Mound City Dishwasher

The Only Scientifically Constructed Dishwasher on the Market



No More Drudgery Dishwashing Made Easy

Washes all kinds of dishes, glass and silverware. Can be used on gas, oil, wood or coal stove. Family size will wash 20 to 30 assorted pieces at one time.

There is more popular demand for a cheap, practical and durable Dishwasher than any article that can be mentioned. Every lady wants one. Agents wanted.

Our agents, both men and women, are making Big Money. Secure the agency for this wonderful seller in your territory. Agents wanted in all foreign countries. Send at once for testimonials, full particulars and prices.

Mound City Dishwasher Co., 3685 Laclede Ave., St. Louis, Mo.

A Loose Leaf Book



PERFECTLY Flat-Opening AND Self-Indexing

Most convenient for price books, route books, pocket ledgers, meter books, engagement books and all forms of records which should be kept in convenient accessible form. Better than any card index. These **"Unimatic"** books are bound in full, genuine, flexible, black leather, are **perfectly flat opening and sheets may be instantly inserted or removed from any part.**

The following sizes sent postpaid on receipt of price:

USE	No.	BINDING EDGE	SIZE OF SHEET	CAPAC. OF COVER INCHES	CAPAC. OF COVER LEAVES	COMPLETE
Vest Pocket	278	2	2 x 4	¼	50	$0.85
" "	441½	4½	4¾ x 6¾	¼	50	.95
Coat Pocket	612	6	6 x 2¾	¼	50	1.20
" "	529	5¾	5¾ x 3	½	125	1.70
" "	632	6¾	6¾ x 3¾	½	125	1.75
" "	7732	7¾	7¾ x 4¾	½	125	2.10
Desk	1139	11	11 x 8½	½	125	3.90

19 other sizes carried in stock

Stock ruling: Quadrille, Unruled, Dollars and Cents, Faint Lines, Double Entry Ledger and 4-Column Price-Book Ruling

Send for sample sheets and complete catalogue of largest line of loose-leaf devices in the world

Sieber & Trussell Mfg. Co., 4002 Laclede Ave., St. Louis

Valuable Books

JUST PUBLISHED

Scientific American Reference Book

12mo. 516 Pages. Illustrated. 6 Colored Plates. Price $1.50, postpaid



The result of the queries of three generations of readers and correspondents is crystallized in this book, which has been in course of preparation for months. It is indispensable to every family and business man. It deals with matters of interest to everybody. The book contains 50,000 facts, and is much more complete and more exhaustive than anything of the kind which has ever been attempted. The "Scientific American Reference Book" has been compiled after gauging the known wants of thousands. It has been revised by eminent statisticians. Information has been drawn from over one ton of Government reports alone. It is a book of everyday reference—more useful than an encyclopedia, because you will find what you want in an instant in a more condensed form. Sixty years of experience alone have made it possible for the publishers of the SCIENTIFIC AMERICAN to present to the purchasers of this book a remarkable aggregation of information.

Home Mechanics for Amateurs

This book has achieved an unparalleled success in one week, and a Special Edition of 4,000 copies has been ordered. It is by far the largest and best book on the subject ever offered at such a low price. It tells how to make things the right way—the "only" way—at small expense. It will prove of value to you—much more than you realize. Do things with your hands. Send for a circular giving contents—the circulars cost only a cent the book $1.50 postpaid. If the book could meet you face to face you would be the first to purchase. The first large edition is almost gone, order to-day.



370 Pages 326 Engravings Price $1.50

TWENTY-THIRD EDITION

EXPERIMENTAL SCIENCE.

By GEORGE M. HOPKINS

Revised and Greatly Enlarged. 2 Octavo Volumes. 1,100 Pages. 900 Illustrations. Cloth Bound, Postpaid, $5.00. Half Morocco, Postpaid, $7.00.

EXPERIMENTAL SCIENCE is so well known to many of our readers that it is hardly necessary now to give a description of this work. Mr. Hopkins decided some months ago that it would be necessary to prepare a new edition of this work in order that the many wonderful discoveries of modern times might be fully described in its pages. Since the last edition was published, wonderful developments in wireless telegraphy, for example, have been made. It was necessary, therefore, that a good deal of new matter should be added to the work in order to make it thoroughly up-to-date, and with this object in view some 200 pages have been added. On account of the increased size of the work, it has been necessary to divide it into two volumes, handsomely bound in buckram.



REVISED and ENLARGED EDITION

The Scientific American

Cyclopedia

Of Receipts, Notes and Queries.

15,000 Receipts. 734 Pages.

Price, $5.00 in Cloth. $6.00 in Sheep. $6.50 in Half Morocco. Post Free.



This work has been revised and enlarged,

900 New Formulas.

The work is so arranged as to be of use not only to the specialist, but to the general reader. It should have a place in every home and workshop. A circular containing full **Table of Contents** will be sent on application.

Those who already have the Cyclopedia may obtain the

1901 APPENDIX.

Price, bound in cloth, $1.00 postpaid.

MUNN & CO., Publishers, 361 Broadway, NEW YORK

Tooth for bridgework, artificial, H. B. Gregory	804,116
Toy swing, G. E. Mellen	803,838
Track sanding device, H. Stokes	803,935
Traction wheel, M. Peterson	803,782
Train order indicator, H. C. Beck	804,087
Trap, F. H. Schultz	803,629
Trimming, D. B. Coon	803,882
Trolley wheel, E. Brossy	803,806
Trousers creaser, A. W. Proctor	803,784
Truck, E. F. & B. R. Sherrill	804,060
Truck, molding machine, W. Sieber	803,931
Tug hook, hame, S. Harrell	804,119
Turbine, E. T. Pollard	803,622
Turbine, W. L. R. Emmet	803,678
Turbine, elastic fluid, F. Windhausen	803,950
Turbines, means for reducing friction loss in, Herles & Novak	803,759
Turbines, relief mechanism for elastic fluid, O. Junggren	803,829
Twine holder, M. Ricketts	804,044
Umbrella, A. Seligstein	803,630
Umbrella, Bamberber & Ingram	803,739
Underreamer, W. J. Travers	803,642
Valve, W. P. Schott	804,056
Valve actuator, automatic, Sullivan & Woodison	803,725
Valve, automatic retaining, Short & Casey	803,930
Valve for flush tanks, water inlet, Morris & Rinaman	803,842
Valve, locomotive blower, Brooke & Vaughan	803,871
Valve, throttle, C. H. Fox	803,889
Vehicle antivibration device, J. M. M. Truffault, reissue	12,399
Vehicle body, S. R. Bailey	803,801
Vehicle brake, P. H. Fuller	804,111
Vehicle gear, F. E. Wilcox	803,949
Vehicle wheel sand cap, W. E. Wright	803,867
Vehicles, antivibration device for, E. V. Hartford	803,589
Ventilator. See Door ventilator.	
Veterinary forceps, S. Brower et al	804,094
Vibratory impacts, implement for imparting, J. H. Champ	803,877
Vise, bench, W. & S. Vanmanen	804,179
Voting machine, A. A. Farwell	804,187
Wagon body supporting device, O. W. Shaw	804,059
Wagon brake, C. M. Marcom	803,773
Wagon brake, J. L. Shaw	804,058
Wagon, hose, B. B. Briggs	803,870
Washing machine, J. J. Green	803,753
Washing machine, J. P. Gordon	803,894
Water elevating apparatus, G. W. MacKenzie	804,196
Water heating apparatus, P. A. Deasy, reissue	12,397
Water meter, C. F. Merrill	803,919
Water supplying device for poultry, F. Bade	804,083
Water to pressure receptacles, apparatus for introducing, S. A. Reeve	803,712
Web-feeding rolls, H. F. Beehman	803,972
Weighing machine, automatic, G. W. Lottridge	803,912
Welding clamping device, electric, A. F. Rietzel	804,045
Well drilling tool coupling, E. A. Davison	804,185
Window, J. H. Giesey, reissue	12,405
Wire fabric making machine, G. A. Raymond	803,711
Wire netting machine, O. Turke	803,941
Wire reel, C. W. Stark	804,064
Wire stretcher, M. K. Lewis	804,144
Wire stretcher, W. T. Martin	804,146
Wire weaving machine, W. H. Mason	803,613
Wire working machine, Nilson & Olson	804,029
Womb supporter, Barchfeld & Hunt	804,086
Wood, producing liquid tight joints for impregnating, G. Kron	803,603
Wood, saturating, W. C. Jones et al	804,132
Wrench, W. J. Ryan	803,790
Wrench and spanner, combined, J. R. Hopkins	804,008
Wrench pipe jaw, Thompson & Brown	803,641

DESIGNS.

Bed spring, D. I. Tompkins	37,649
Bottle, C. Hitzl	37,641
Clock case, A. W. & G. B. Owen, Jr	37,642
Clock case, W. E. Pardridge	37,643
Hand bag, H. Grossman	37,644 to 37,646
Hat rack, B. Rosenberg	37,650
Monument, E. M. Wolff	37,658
Range, cooking, A. F. Harter	37,654 to 37,656
Ruffling, C. Seidel	37,647
Seed case, R. R. Ricketts	37,648
Spoon, W. C. Codman	37,640
Stove, cooking, A. F. Harter	37,652, 37,653
Stove, heating, A. F. Harter	37,657
Stove, oil, C. V. Roberts	37,651

TRADE MARKS.

Baking powder, M. C. Young	47,511
Baking powder, soda, and cream of tartar, A. Schilling & Co.	47,498
Belting, waterproof leather, Providence Belting Co.	47,436
Bitters, C. F. Lauber	47,488
Blankets, American Multiple Fabric Co	47,478
Books, Lothrop, Lee & Shepard Co	47,426, 47,427
Books, L. C. Page & Co	47,473
Boots and shoes, leather, Marks, Rothenberg & Co.	47,430 to 47,433
Boots and shoes, leather, Noyes-Norman Shoe Co.	47,434
Brass or copper or alloys thereof, sheets and bars and sheathing of, Taunton-New Bedford Copper Co.	47,439
Butter, Hazlewood Co.	47,522
Butter coloring preparation, Monroe Drug Co.	47,472
Buttons and studs, Parks Bros. & Rogers	47,491
Candies, mixed, G. W. Chase & Son Mercantile Co.	47,519
Candy, Gibbs Preserving Company of Baltimore City	47,518
Canned vegetables, Portland Packing Co.	47,493 to 47,496
Canned vegetables and fruits, Portland Packing Co.	47,492
Canoes, J. H. Rushton	47,437
Carbonating powder, Church & Dwight Co	47,448
Cards, playing, New York Consolidated Card Co.	47,550
Carpets and rugs, H. R. Albee	47,477
Chandeliers and brackets, McKenney & Waterbury Co.	47,543
Cigarettes, S. S. Pierce Co	47,549
Cigars, S. S. Pierce Co	47,438
Cigars, J. Weinreich	47,442
Cigars, E. H. Gato Cigar Co.	47,451 to 47,453, 47,540
Cigars, Rodriguez & Teijeiro	47,546, 47,547
Coal and wood, preparation to increase efficiency of, Kalorin Fuel Co	47,463
Collars and cuffs, Fiberloid Co	47,504
Cordial, bitter, L. E. Jung	47,486
Corsets, Abraham & Straus	47,512
Desks and typewriter cabinets, Horrocks Desk Co.	47,425
Driving bits, safety, W. Van Arsdale	47,440
Dyestuff, Cassella Color Co	47,480, 47,481
Elastic webbing, Russell Manufacturing Co	47,465
Emblems, society, Sinnock & Sherrill	47,548
Felts and jacketings, Knox Woolen Co	47,487
Flavoring extracts, Sieged, Cooper & Co	47,499
Florida water, Lanman & Kemp	47,457
Flour, wheat, Washburn-Crosby Co.	47,508
Flour, wheat, C. E. Chauder	47,516
Flour, wheat, Pillsbury-Washburn Flour Mills Co.	47,530
Food receptacles, Ware-Standard Manufacturing Co.	47,441
Food, stock, National Food Co	47,552
Gin, Baird-Daniels Co.	47,513
Hair dye, W. W. Scheffler	47,497
Hooks and eyes, De Long Hook & Eye Co	47,537
Hosiery, C. Chipman's Sons	47,515
Ignition parts, Herz & Co	47,426
Insulating preparation, liquid, Massachusetts Chemical Co.	47,413
Knit cotton underwear, mercerized, Robert Reis & Co.	47,532
Lap coverings, W. B. Riley & Co	47,545
Lard substitute, McCaw Manufacturing Co	47,524
Locks, lock bolts, catches, and latches, Patterson, Gottfried & Hunter	47,435
Lye, P. C. Tomson & Co	47,475
Medicated oil for rheumatism, G. Ardito	47,479

Raise Your Own Salary!

Raise Your Own Income!

Lift yourself! Move! Go forward after opportunities! When wishing, wish for something worth while. Let the other fellow bemoan his fate and quarrel with the conditions, but as for you, forget the things that are behind and press toward the goal—the goal of self-mastery.

A business transaction, and, particularly, a sale, requires knowledge of yourself, confidence in yourself, the force of your personality—all of which will determine whether you secure a favorable interview, how long you will **sustain** attention, to what extent you will **create** interest and bring about **desire** with an accompanying resolution, **insuring** Success.

The science of business, the science of labor and the science of life are all based upon organized laws, truths and principles which govern the development of the personality of the individual. The Sheldon School is prepared to teach by a **special correspondence Course** anyone desiring to acquire wealth, riches and honor, together with the capacity to enjoy them. It has already taught many thousands of men of all ages and from all walks of life. They have increased their salaries and incomes.

It is a simple and easy course of instruction, requiring **thorough, earnest and studious** reading of the Lessons. If we really desire to improve, the best thing in the world is to find out wherein we are weak, in what we are lacking, what our mistakes are. The remedy is easy to find and readily applied when we have recognized that we **really** need to know more in order to be other than we are.

It will cost you two cents to ask us for our literature, but this will be the only expense attached. It will be sent with pleasure on receipt of your request.

The Sheldon School, (1655) The Republic, Chicago.

PICK IT UP

it lights automically; set it down, the light vanishes; for bright, steady light, tighten set screw. Battery lasts 3 to 5 months according to use. Absolutely unique and novel. A handsome and useful ornament for dining room table, parlor or bedroom. A sensible Xmas present.

$1.00 complete; by mail $1.25; renewal battery mailed for 50 cents.

64-page catalog.

ELECTRO IMPORTING CO
32 PARK PLACE, NEW YORK

The Dean Cleaner Pays for Itself

A trial of the work of the **Dean Boiler Tube Cleaner** will convince the most skeptical that the cleaner will pay for itself in a surprisingly short time in the saving of fuel. This trial will cost you nothing,

as the Dean is sent *without charge* to any responsible concern for a free trial of its merits. Send for booklet, "Boiler Room Economy." Yours for the asking.

THE WM. B. PIERCE CO.
319 Washington Street, Buffalo, N. Y.

CASH for Your Real Estate or Business

If you want to sell,
Send description and price to

FRANK P. CLEVELAND, Real Estate Expert
1510 Adams Express Building, Chicago, Ill.

ELECTRICAL APPARATUS REPRESENTED by Conventional Diagrams in Drawings.—Fifty diagrams showing the usual method of illustrating electrical apparatus in drawings. A labor saving paper. Contained in SUPPLEMENT **1106.** Price 10 cents. For sale by Munn & Co. and all newsdealers.

BURN AIR-IT'S CHEAP NO STOVE LIKE IT!



Consumes 895 Barrels of Air to 1 gallon of Kerosene. Penny fuel, burns like gas, hottest fire, won't explode, saves work and fuel bills. No coal, wood, dirt, ashes—no wick, no valves, easy operated, handsome, durable. **Grand cooker, baker,** quick work, cool kitchens. **18000 Harrison Wickless, Valveless Oil-Gas and Air Burners sold 1 month. AGENTS WANTED—$40 Weekly. GREATEST MONEY MAKER.** Guaranteed, all sizes, sent anywhere, **$8 up. Write, FREE proposition, 30 day trial offer.** Address only mfgrs. **World Mfg. Co., 5909 World B'ld'g, Cincinnati, O.**

250 Bookcases Free

To secure a prompt response to this announcement we have arranged to distribute free of charge 250 beautiful bookcases to the first 250 of our readers who answer this advertisement and accept our proposition as explained below.

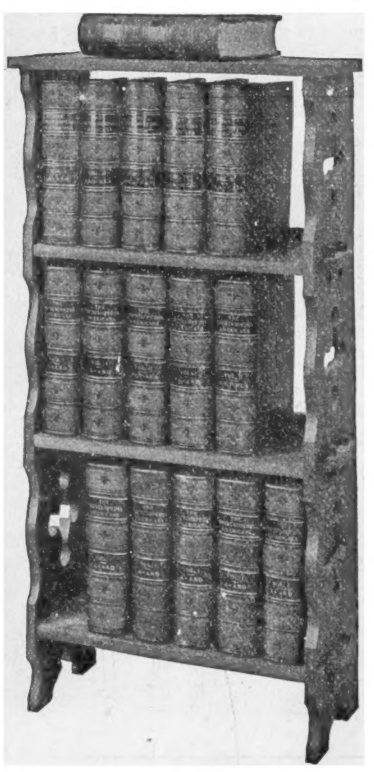

WITHIN REACH OF ALL

The **AMERICANA** needs no word of praise from us. Produced by America's foremost scholars and experts, it stands as an achievement which has already met with the enthusiastic approval of the American people.

Before ever a line was written for this great work the **Ideal** was set: **A National Work Universal in Its Information—American in Its Production.**

The **AMERICANA** is distinctly a national work. It is made by Americans. Every section of America has been called upon to contribute, and for the first time, in a work of universal information, North, South, East and West, Canada and South America have had full and true representation.

The AMERICANA is new from cover to cover—new and beautiful type, new maps, new text illustrations, new color plates and best of all, **new and original treatment throughout** by the foremost

AMERICAN SCHOLARS AND EXPERTS

The **AMERICANA** has commanded the services of so many educators, scholars and experts as to fully justify its title of the one

GREAT NATIONAL REFERENCE LIBRARY

No mere advertisement can convey an adequate idea of the vast interest and immense utility of the **AMERICANA,** or of its exceptional value and sumptuous appearance. We have therefore prepared for distribution among those interested, a handsome 120 page book containing *specimen pages, maps, full-page plates, colored plates, portraits of celebrities, photographic plates showing the fastest train in the world, the largest steamship ever built in America, the famous Flat Iron Building, etc., etc.* Send us your name and address and we will mail you this beautiful and expensive book FREE.

OUR PROPOSITION

To the first 250 persons who answer this advertisement and later order the set, we will present **absolutely free** one of the handsome bookcases shown in the illustration above. This bookcase will cost you nothing. We offer it as a premium for acceptance of our offer. It is made especially to hold the **AMERICANA,** and will be an ornament to any home. Fill out the coupon cut from this advertisement and mail it to us to-day. Full particulars of our offer and our handsome 120-page book will be sent you at once, postpaid.

THE SCIENTIFIC AMERICAN CLUB
258 Fifth Ave., New York City

GENTLEMEN:—Please send without cost to me sample pages and full particulars of your advertising offer with free bookcase.

Name .....

Street .....

Town .....

State .....

HENRY CAREY BAIRD & CO.
Industrial Publishers, Booksellers and Importers,
810 Walnut St., Philadelphia, Pa., U. S. A.

☞ *Our New and Revised Catalogue of Practical and Scientific Books, 94 pages, 8vo. (Oct. 1, 1905); Catalogue of Chemical Technology and General Chemistry, July 1, 1905 (New and Up-to-Date); a Catalogue of Books on Metallurgy, Mining, Prospecting, Mineralogy, Geology, Assaying, Analysis, etc.; a Catalogue of Books on Steam and the Steam Engine, Machinery, etc; a Catalogue of Books on Sanitary Science, Gas Fitting, Plumbing, etc.; and our other Catalogues and Circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.*

IF IT'S TO BE MENDED
Dennison's
Glue, Paste or Mucilage
will do it! The Patent Pin Tube makes it a pleasure to use Dennison's Adhesives. The "Pin Tube" makes this difference—contents always air-tight, cannot become too thick or sour—no cork, stopper or cap to get stuck fast, just a pin to pull out, and out it always comes, and leaves a clear passage for the contents. No brush that gets hard—apply the material direct from the little hole in the tube—just enough—no waste—none spilled—a clean operation.
If Dennison's adhesives are not for sale at your dealer's, a Patent Pin Tube of Glue, Paste or Mucilage will be mailed on receipt of 10 cts.
Please address Dept. 26 at our nearest store.
Dennison Manufacturing Company,
The Tag Makers.
Boston, 26 Franklin St.
New York, 15 John St.
Philadelphia, 1007 Chestnut St.
Chicago, 128 Franklin St.
St. Louis, 413 North 4th St.



THREE TRAIN LOADS OF ARMY GOODS
Sold to Francis Bannerman, 501 Broadway, N. Y.

Tents, all sizes,	$1.90 up.	Holsters,	$0.10
Mess Pans,	.20	Navy Hats,	.10
Haversacks,	.10	Carbines,	1.00 up.
Revolvers,	.50 up.	Muskets,	1.60 up.
Sword Bayonets,	.20	Machetes,	1.00
Saddles,	2.75 up.	Canteens,	.28
Bridles,	1.00	Leggings .28 up, Spurs	.40
Complete New Uniforms	1.60	Lariats,	.58
U. S. A. Shirts,	1.75	Bayonets,	.10

176-PAGE ILLUSTRATED CATALOGUE MAILED, 12c.
Largest stock in the world—15 acres required for storage.

A. W. Faber.
Manufactory Established 1761.
Lead-Colored Slate Pencils, Rubber Bands, Erasers, Inks, Penholders, Rulers, Water Colors, Improved Calculating Rules.
Send for descriptive Circular S.
44-60 East 23d Street, New York, N. Y.
Grand Prize, Highest Award, St. Louis, 1904.

"While there's Snow there's **SKEEING"**
The happiest, healthiest hours of winter will be those spent on
"TAJCO" SKEES.
Get a pair early and "glide, coast and leap into health and happiness" as have thousands of other enthusiastic skidors. Physicians recommend the sport of skeeing. The ideal winter pastime for both sexes and all ages. Ask dealer for the special size "TAJCO" skees made for your height and weight. Illustrated book, on the art of skeeing and skees mailed post-paid for ten cents. 16-page booklet on "TAJCO" skeeing and skees FREE.
327 to 339 SOMERSET ST.
THEO. A. JOHNSEN CO., PORTLAND, MAINE.

Water Motor and Dynamo
THIS IS OUR No. 8 PLANT.
PRICE $9.00

Weight, packed in box, 16 lbs.
Will light small incandescent lights. Direct current for general experimenting. Send for Catalogue B.
THE CARLISLE & FINCH CO.,
233 E. Clifton Avenue, · Cincinnati, O.

60 YEARS' EXPERIENCE
PATENTS
TRADE MARKS
DESIGNS
COPYRIGHTS &C.
Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. HANDBOOK on Patents sent free. Oldest agency for securing patents.
Patents taken through Munn & Co. receive *special notice*, without charge, in the
Scientific American.
A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.
MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

Medicinal compounds for the cure of catarrhal diseases and colds, Ely Bros. 47,455
Medicinal food prepared from wheat, Imperial Granum Co. 47,539
Medicinal tonic and laxative preparation, California Extract of Fig Co. 47,446
Medicine for external and internal use, B. Romero 47,460
Medicine for the cure of diseases of the throat and lungs, Chamberlain Medicine Co. 47,449
Mineral water, Berry Hill Mineral Spring Co. of Va. 47,502
Molasses, N. W. Taussig Co. 47,490
Molasses, syrups, and sorghums, New Orleans Coffee Co. 47,529
Moth bags and moth paper, T. Manahan 47,428
Oils, lubricating, W. C. Robinson & Son Co.. 47,509
Overalls, Sanders Manufacturing Co. 47,534
Paint and primer, liquid, T. W. Stemmler... 47,501
Paint, locomotive, Stackite Paint Co. 47,500
Paint or coating, liquid roofing, Elliott Varnish Co. 47,541
Paper, linen writing, H. V. Wagoner 47,420
Paper, writing, W. G. Willmann 47,443
Pavements, bituminous, Warren Brothers Co. 47,476
Pens, fountain, Conklin Pen Co. 47,418
Perfumery, toilet waters, extracts, and cologne, D. R. Bradley & Son 47,469, 47,514
Pharmaceutical preparation, Lloyd Bros. 47,458
Pianos, Baldwin Co. 47,553
Pills for catarrh, G. Ardito 47,445
Preparations for the treatment of certain named diseases, S. H. Winstead Medicine Co. 47,462
Printers' quoins, Hempel & Dingens 47,411
Remedies, liver, L. E. Cash 47,447
Remedy for certain named diseases, Home Remedy and Supply Co. 47,456
Remedy for female weaknesses, J. A. McGill 47,459
Roofing felt, saturated, J. A. & W. Bird & Co. 47,468
Roofing material, Lincoln Waterproof Cloth Co. 47,474
Rum, C. H. Graves & Sons 47,485
Salve, F. W. S. Elstroth 47,454
Salves for the treatment of the skin, G. C. Wilson 47,467
Screw plates, taps and dies, bolt cutters, and nut tappers, Wiley & Russell Manufacturing Co. 47,444
Seed, grass, grain, timothy, clover, hemp, canary, and rape, Albert Dickinson Co., 47,414 to 47,417
Sheetings and drillings, cotton, McComb City Cotton Mills 47,489
Shoe polishers and daubers, Whittemore Bros. & Co. 47,510
Shoes, heavy leather, Manier, Dunbar & Co.. 47,429
Shoes, leather and canvas, Lindner Shoe Co. 47,464
Silverware, table, Towle Manufacturing Co.. 47,551
Skin cleanser and healer, Columbia Shoe Dressing Co. 47,450
Soap, McCaw Manufacturing Co. 47,525
Soles or taps for shoes, leather, Daniel Forbes Co. 47,421
Specific for stomach and catarrhal diseases, Hentz Co. 47,505
Stone, construction and building, C. M. Hagan 47,542
Sugar, Postum Cereal Co. 47,531
Suits, ready-made, Goldsmith Joseph Feiss Co. 47,538
Syrup, vegetable, cane, and fruit, Chicago Concentrating Co. 47,517
Tapioca, W. S. McKinley 47,527
Tea, Milliken, Tomlinson Co. 47,528
Tobacco, chewing, Gilbert Sons & Co. 47,423
Tobacco, plug, Monarch Tobacco Works.... 47,544
Tobacco, smoking, Ryan-Hampton Tobacco Co. 47,461
Turpentine, spirits of, H. J. Hayne 47,521
Undershirts, drawers, and combination suits, Cooper Manufacturing Co. 47,536
Varnishes and stains, Copaline Manufacturing Co. 47,503
Washing machines, E. H. Huenefeld 47,523
Washing powder, McCaw Manufacturing Co. 47,526
Watches, Elgin National Watch Co. 47,470
Watches and clocks, Robt. H. Ingersoll & Bro. 47,471
Watches, watchcases, and watch movements, E. Howard Watch Co. 47,483
Whisky, C. H. Graves & Sons 47,484
Whisky, S. Hochstadter 47,412
Whisky, J. J. Douglas Co. 47,419
Whisky, Wm. Bergenthal Co. 47,466
Whisky, E. Eising & Co. 47,482
Whisky, C. H. Graves & Sons 47,484
Whisky, Wm. Bergenthal Co. 47,507
Whisky, Guet & Senac 47,520
Whisky, D. Sachs & Sons 47,533
Whisky, Taylor & Williams 47,535
Wool, pulled, H. F. Norton Co. 47,506

LABELS.

"A Yard of Candy," for candy, J. G. Smith 12,462
"Anti-Mole," for a mole remover, Miller Manufacturing Co. 12,453
"Autoline," for a liquid polish, G. H. Sharp. 12,461
"Bateman's Eczematine," for a medicine, Bateman Bros. 12,445
"Beard's Natural Finish," for shoe dressings, A. Beards 12,446
"Ben Bey," for cigars, Schmidt & Co. 12,459
"Benold's Health Bread," for bread, F. H. Benold 12,447
"Bilisoly's Headache Powders," for headache Powders, C. P. Bilisoly 12,449
"Bill William," for cigars, H. L. Bowers... 12,450
"Chamo Brand Mocha and Java Coffee," for canned coffee, United States Printing Co. 12,463
"Chestnut Burr," for cigars, Roby & Lynn.. 12,457
"Chestnut Knockers," for cigars, Roby & Lynn 12,458
"Mo Hair," for hair tonic, M. A. Phillips... 12,455
"Newline," for toilet paper, Scott Paper Co. 12,460
"Ox-Cart," for coffee, Edwin J. Gillies & Co. 12,452
"Primrose," for offset traps, R. W. Reid... 12,456
"Primrose Brand," for butter, Broadwater County Creamery Co. 12,451
"Pulmonol," for a liquid specific for lung diseases, A. V. Payne 12,454
"Royal Dutch Mustard," for mustard, G. J. Washburn 12,465
"The Black Ball Cigar," for cigars, Bethesda Cigar Co. 12,448
"Walker's Great Blood Mixture," for a remedy for diseases of the blood, A. W. Walker 12,464

PRINTS.

"A Borden Baby," for condensed milk, Julius Bien & Co. 1,473
"Floce Stane," for floor stains, A. B. Fertich & Co. 1,472
"Hasn't Scratched Yet," for a scouring soap, Bon Ami Co. 1,474
"Interlocking Elastic Tiling," for floor and wall tiling, D. H. Watts, Jr. 1,481
"Pickles," for pickles, W. N. Brewer 1,475
"Sego Lily Underwear," for underwear, Salt Lake Knitting Works 1,479
"Standard Portable Shower," for portable showers, Standard Sanitary Manufacturing Co. 1,480
"Thayer's Quinine Shampoo," for hair invigorator, Federal Lithograph Co. 1,477
"The Peer," for hot water heaters, J. McCartney 1,478
"Wright's Saw Tips," for saws, Charles E. Wright Co. 1,476

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

Sci. Am., Nov. 19, 1905

MECHANICAL DRAFTSMEN desiring to fit themselves for better paying positions should send for 200-page handbook (FREE) describing our **Mechanical Drawing** course, and over 60 other courses, including **Electrical, Mechanical, Steam** and **Civil Engineering, Architecture, Structural Drafting, Telephony, Textiles,** etc.
American School of Correspondence, Chicago, Ill.

EXPERT WANTED
By Banking House
to make reports on Street Railway, Electric Light and Power properties. Address, giving age, education (general and technical), previous experience and salary expected.
FINANCIER, Box 271, New York.

LET US BE YOUR FACTORY
WRITE FOR ESTIMATE ON ANY ARTICLE YOU WANT MANUFACTURED
STAMPINGS, MODELS, EXPER. WORK
WRITE FOR FREE BOOKLET
THE GLOBE MACHINE & STAMPING CO.
970 Hamilton St., Cleveland, O.

PLUMBING SCHOOLS.
Men and boys wanted to earn $5.00 a day, after two months' instruction. Position guaranteed. COYNE BROS. CO. PLUMBING SCHOOLS, 239 Tenth Avenue, New York. Cincinnati, O., St. Louis, Mo. Free catalog.

ICE MACHINES. Corliss Engines, Brewers' and Bottlers Machinery. THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery.
E. V. BAILLARD, 24 Frankfort Street. New York.

RUBBER Expert Manufacturers Fine Jobbing Work
PARKER, STEARNS & SUTTON, 228-229 South St., New York

Special Machinery designed and built to order.
G. M. MAYER, M.E., 1131 Monadnock Bl., Chicago, Ill.

DRYING MACHINES. S. E. WORRELL Hannibal, Mo.

Model Machinery and Experimental Work.
W. H. CRAWFORD 194 Broadway, New York City.

DIAMOND TOOLS For Mechanical Purposes.
John Wennstrom's Sons Co., 356 41st St., Brooklyn, N. Y

MODELS dies, boxes, metal stampings, patent articles novelties, manufactured and sold. Printing on aluminum. U. S. Novelty Co., Lily Dale, N. Y.

EXPERIMENTAL WORK Scientifically and accurately executed. Models and small machinery perfected. STENDICKE & VOLKMER, 61 Fulton Street. Telephone 5655 John.

MODELS AND EXPERIMENTAL WORK
Inventions developed. Special machinery. Milliken Machine Works, 79 & 81 Washington St., Brooklyn, N. Y.

THE SCHWERDTLE STAMP CO.
STEEL STAMPS, LETTERS & FIGURES
BRIDGEPORT CONN

INVENTORS.—Our specialty is practically developing inventions. Design and build special, plain and automatic machinery, presses, dies, models, patterns and jigs. Send for Booklet No. 5.
A. NACKE & SON, 236-42 S. 9th St., Philadelphia, Pa.

NOVELTIES & PATENTED ARTICLES
MANUFACTURED BY CONTRACT. PUNCHING DIES. SPECIAL MACHINERY.
E. KONIGSLOW STAMPING & TOOL WORKS, CLEVELAND, O.

Experimental & Model Work
Cir. & advice free. Wm. Gardam & Son, 45-51 Rose St, N.Y

GINSENG The money making crop. Easily grown. Room in your garden to grow hundreds of dollars worth annually. Roots for sale. Plant now. Literature free. Write today.
BUCKINGHAM'S GINSENG GARDEN,
Dept. 4, Zanesville, Ohio

NOTICE TO CONTRACTORS.
SEALED PROPOSALS suitably endorsed on envelope for furnishing and installing three 125 H. P. and one 70 H. P. horizontal tubular boilers, at the Hudson River State Hospital, Poughkeepsie, N. Y., will be received up to 3 o'clock P. M., on the 22nd day of November, 1905, by the State Commission in Lunacy, at the Capitol, Albany, N. Y., when the bids will be opened and read publicly.
Drawings and specifications may be consulted and blank forms of proposal obtained at the Hudson River State Hospital, Poughkeepsie, N. Y., or by application to G. L. Heins, State Architect, in the Capitol, at Albany, N. Y.
Contracts will be awarded to the lowest responsible and reliable bidders unless the bids exceed the amount of funds available therefor, in which case the right to reject all bids is reserved.
T. E. McGARR, *Sec'y*,
Dated Nov. 8, 1905. State Commission in Lunacy

A MONEY MAKER
Hollow Concrete Building Blocks, Best, Fastest, Simplest, Cheapest Machine. Fully guaranteed.
THE PETTYJOHN CO.
615 N. 6th Street. Terre Haute, Ind


LUFKIN
TAPES AND RULES
ARE THE BEST.
For sale everywhere. Send for Catalog No. 16.
LUFKIN RULE CO.
Saginaw, Mich., U. S. A.
New York and London.

AUTO STORAGE BATTERIES ALL KINDS
THE WILLARD STORAGE BATTERY CO. CLEVELAND O

MANUFACTURERS—I am now thoroughly equipped to represent Eastern manufacturers in the Western territory; correspondence solicited. EDWARD TIFFIN, 303 Fullerton Building, St. Louis.

Are you interested in Patents, Model or Experimental work? Our booklet entitled
WHAT WE DO—HOW WE DO IT
will be sent to you on request.
KNICKERBOCKER MACHINE WORKS, Inc.,
8-10-12 Jones Street, New York.

MASON'S NEW PAT. WHIP HOIST
for Outrigger hoists. Faster than Elevators, and hoists direct from teams. Saves handling at less expense.
Manfd. by VOLNEY W. MASON & CO., Inc.
Providence, R. I., U. S. A.

Magical Apparatus.
Grand Book Catalogue. Over 700 engravings 25c. Parlor Tricks Catalogue, free.
MARTINKA & CO., Mfrs., 493 Sixth Ave., New York.

Telegraphy Circular free. Wonderful automatic teacher. 5 styles $2 up. OMNIGRAPH CO., Dept. 52, 39 Cortlandt St., New York.

AGENTS REAP QUICK HARVEST
$5.00 a day and upward selling FORD'S ALL WOOD Air-Tight Weather Strip. Easily applied to doors and windows. Reduces coal bills. Samples and terms FREE.
CHAS. J. FORD, 225 Senior Building, Holyoke, Mass.

INVENTORS We manufacture METAL SPECIALTIES of all kinds, to order; largest equipment; lowest prices. Send sample or model for low estimate and best expert advice FREE
THE EAGLE TOOL CO., Dept. A, Cincinnati, O.

TYPEWRITERS ALL MAKES
All the Standard machines SOLD or RENTED ANYWHERE at HALF MANUFACTURERS' PRICES. Shipped with privilege of examination. Send for Cat.
Typewriter Emporium, 203 LaSalle St., Chicago

New York Belting & Packing Co. Ltd.

Manufacturers of high grade Rubber Belting, Diaphragms, Dredging Sleeves, Emery Wheels; Air Brake, Steam, Suction and Garden Hose, etc., Mats, Matting, Interlocking Rubber Tiling.

Also manufacturers of moulded and special rubber goods of every description.

Write for catalogue.

91-93 Chambers St., New York

To INVESTIGATE



The mechanically correct DURYEA, invariably is to purchase. **Duryeas** are different is the reason. Patented features make them for Comfort and Economy Supreme. Send for leaflet it Tells the Reason Why.

DURYEA POWER CO., 44-84 Aeyrud St., Reading, Pa.



CHARTER

Stationaries, Portables, Hoisters. Pumpers, Sawing and Boat Outfits, Combined with Dynamos.

Gasoline, Gas, Kerosene.

Send for Catalogue.

State Power Needs.

CHARTER GAS ENGINE CO., Box 148, STERLING, ILL.

Scales All varieties at lowest prices. Best Railroad Track and Wagon or Stock Scales made. Also 1000 useful articles, including Safes, Sewing Machines, Bicycles, Tools, etc. Save Money. Lists Free. CHICAGO SCALE CO., Chicago, Ill.

What Is Daus' Tip-Top?

TO PROVE that Daus' "Tip Top" is the best and simplest device for making **100 copies** from pen-written and **50 copies** from typewritten original, we will ship complete duplicator, cap size, **without deposit,** on **ten (10) days' trial.**

Price $7.50 less trade discount of 33⅓ per cent., or $5 Net

The Felix A. B. Daus Duplicator Co., Daus Bldg., 111 John St., New York

CRUDE ASBESTOS

DIRECT FROM MINES

PREPARED ASBESTOS FIBRE for Manufacturers use

R. H. MARTIN, OFFICE, ST. PAUL BUILDING 220 B'way, New York.

SEE HOW EASY IT IS

to clean your auto or carriage with the **IDEAL CARRIAGE WASHER**

No Splashing. No Cold Hands. Saves 40 Per Cent. Water. Saves 60 Per Cent. Labor. Impossible to Scratch or Injure the Finest Finish. Keeps the Varnish Glossy and Bright.

Price, delivered, is $3.00 each.

Send to-day. You will need it to-morrow.

IDEAL CARRIAGE WASHER CO.
148 Lenox St., Rochester, N. Y.



COMBINATION SCREW DRIVER

Complete, with three screw driver tips and three brad awls, $1.50
Send for particulars. Catalogue No. 17 B of Fine Tools free.

THE L. S. STARRETT CO., Athol, Mass., U.S.A.

UNIVERSITY SHOE

(Trade-Mark.)

Heaviest oily grain leather—tan colored. Watertight construction. Comfortable and nearly indestructible. Send for pamphlet.

J. P. TWADDELL,
1210-1212 Market St., Philadelphia

The Most Modern Marine Motor



having the most rapid speed and weighing least per h. p. and possessing the fewest parts is the **Van Auken Motor.** No vibration, easy to operate, simple, reliable, clean. Great power. Perfect control. Always ready. Every stroke cleans the cylinder.

VAN AUKEN-CLEVAUC CO.
Yonkers, N. Y., U. S. A.

Bausch & Lomb Microscopes

This is an invitation to send for our illustrated catalog of Microscopes if you are interested in best instruments for the least money, those that are used in the leading laboratories everywhere and by individual workers who know the best.

Bausch & Lomb Optical Co.
MANUFACTURERS
ROCHESTER, N. Y.
NEW YORK CHICAGO BOSTON
SAN FRANCISCO FRANKFORT A-M GERMANY

RUST ON GUNS TOOLS & CYCLES **PREVENTED** BY **MANNOCITIN**
C. H. BESLY & CO. CHICAGO ILL. U.S.A.

15 to 21 South Clinton Street.



Jackson's Series 5-step Turbine Pump

Largest High Head Series Turbine Pump in the World

Capacity 10,000 gallons per minute. Total lift 550 feet used for hydraulicing on one of the largest placer mines in the world. *See Scientific American, August 19, 1905.* Catalog No. 20.

Byron Jackson Machine Works, San Francisco, Cal., U. S. A.

20th CENTURY SOAP,

a purely vegetable oil soap, containing no lye, but cleaning by the penetrating nature of its oils. Good for engineers, electricians, chemists, etc., it thoroughly removes all stains, such as rust, grease and oil, either from the hands or clothing, without injuring in the slightest. Also unsurpassed as a **Drilling Soap. Has no equal for automobiles.** For cleaning floors and walls, especially hard wood, it is invaluable. Has no equal for automobiles. Does not injure the polish, but adds to the lustre. If your dealer does not keep it, send us his name and address and we will send you a sample can free. Special attention given to Export orders.

HOFFHEIMER SOAP CO., 169 E. Jackson Boulevard, CHICAGO
Eastern Office, No. 1 Madison Square, NEW YORK. Renshaw Bldg., PITTSBURG, PA.

The Rambler

requires 40 to 50% less gasoline than other cars

110 miles, over three mountain grades, from Los Angeles to Santa Barbara, Cal., on **7½ gallons of gasoline,** is the Rambler Record. The three other cars with perfect scores used 9½, 10½ and 12 gallons respectively.

A practical demonstration at any Rambler agency of Rambler ease of control, simplicity and reliability of mechanism, slight cost of fuel and maintenance, will prove to you that the Rambler is the car for you to buy.

Surrey, Type One, illustrated below, complete with lamps, horn, tools, etc., $1,200.00. Cape top $100.00 extra. Write for catalogue illustrating and describing six different models from $650.00 to $3,000.00.

Thos. B. Jeffery & Company,
Main Office and Factory, Kenosha, Wisconsin, U. S. A.
BRANCHES:
Boston, 145 Columbus Ave.; Chicago, 302-304 Wabash Ave.; Philadelphia, 242 N. Broad St.; Milwaukee, 457-459 Broadway; New York Agency, 134 W. 38th St. Agencies in other leading cities.

MAGIC LANTERNS

Stereopticons and Moving Picture Machines —all sizes, all prices. Views illustrating timely subjects. Fine thing for Church and Home Entertainments. Men with small capital make money giving public exhibitions. Illustrated catalogue free.

McALLISTER, MFG. OPTICIAN, 49 Nassau St., New York.

Cheap Power from Kerosene

SAFE, SIMPLE, VALVELESS AND RELIABLE

Universal Kerosene Engine.



Automatic in operation, easily started, and runs steadily and at a comparatively high rate of speed at a cost of less than one pint of kerosene oil per actual horse power hour. Praised wherever used. Highest efficiency at lowest cost. For prices and terms address

UNIVERSAL KEROSENE ENGINE CO.
6, 8 and 10 First St., New York City

THE Nulite Vapor GAS Lamps

For Home, Store and Street

We also manufacture Table Lamps, Wall Lamps, Chandeliers, Street Lamps, Etc. 100 Candle Power seven hours ONE CENT. No Wicks. No Smoke. No Odor. Absolutely safe. THEY SELL AT SIGHT. Exclusive territory to good agents. ☞ Write for catalogue and prices.

Chicago Solar Light Co., Dept G, Chicago

The Wizard Engine — With Pump

OLDS ENGINES

Economical Power

In sending out their last specifications for gasoline engines for West Point, the U. S. War Department required them "to be **Olds Engines** or equal." This speaks volumes for our engines. It means they excel all others or the U. S. Government would not demand them.

They are the horizontal type, 2 to 100 H. P., and are so simply and perfectly made that it requires no experience to run them, and

Repairs Practically Cost Nothing.

Send for a catalogue of our Wizard Engine, 2 to 8 H. P. (spark ignition system, same as in the famous Oldsmobile) the most economical small power engine made; fitted with either pump-jack or direct connected pump; or our general catalogue showing all sizes.

Olds Gasoline Engine Works,
Lansing, Mich.

New York Agents, R. H. Devo & Co., Binghamton, N. Y.

Opaque Projector

A Magic Lantern for showing Engravings, Prints, Cuts, Illustrations in Books, Models and Specimens on the Screen without previous preparation, brilliantly lighted and in natural colors. Send for circular.

Williams, Brown & Earle
Dept. 6, 918 Chestnut St., Philadelphia, Pa.

Complete Only **$15.**

BURNS WOOD or COAL

JUST SEND ME ONE DOLLAR

and I will ship C. O. D. to any railroad station in the U. S. this fine Willard Steel Range Anyone can say they have the best range in the world, but I will furnish the evidence and leave the verdict to you. After you examine this range, if you are satisfied in every way, pay Agent $14.00 and freight, and you become the possessor of the best range in the world for the money. The range has six 8-inch lids; 18-inch oven; 15-gallon reservoir; large warming closet; top cooking service 30x34 ins. Guaranteed to reach you in perfect order. Shipping weight, 400 lbs. Thousands in use and every one of them giving satisfaction. Write for full description and testimonials.

WM. G. WILLARD
No. 12 WILLARD BUILDING
316-320 CHESTNUT STREET ST. LOUIS, MO

COMPLETE 20 LIGHT OUTFIT $ 450.

We have complete Outfits for ....

YOUR OWN ELECTRIC LIGHTS

Any size place, summer homes, launches, yachts, etc. Every detail included; very best material; practical. So simple no electrician required. **Light All the Time,** as storage battery included. **Gas, Gasoline** or **Steam** engines used give plenty of power for pumping water, sawing wood, refrigeration, etc. For our new 56-page Catalogue describing over 100 different outfits, address

ELECTRIC DEPARTMENT

RICHARDSON ENGINEERING CO., Hartford, Conn.

Everybody Needs an Accident Case

Do you know how to treat a cut or a bruise, or how to relieve a painful scald? Have you the appliances and remedies at hand? Are they pure and antiseptic?

THE U. S. EMERGENCY CASE

contains 18 articles, including bandages, dressings, ointments, plasters, absorbent cotton, scissors, First Aid Handbook, etc., all in a compact metal case, and the price is **ONE DOLLAR,** express prepaid.

If after examination you are not entirely satisfied, we will cheerfully refund the money.

Large Size, for Workshops, Offices, Mills, etc., $3.50

U. S. EMERGENCY CASE CO.
5 Weaver Building, Utica, N. Y.

HATCH & BRITTIN, Inc., General Sales Agents
1101 Flatiron Building, New York

REFERENCE: Utica Trust and Deposit Co., Utica, N. Y.

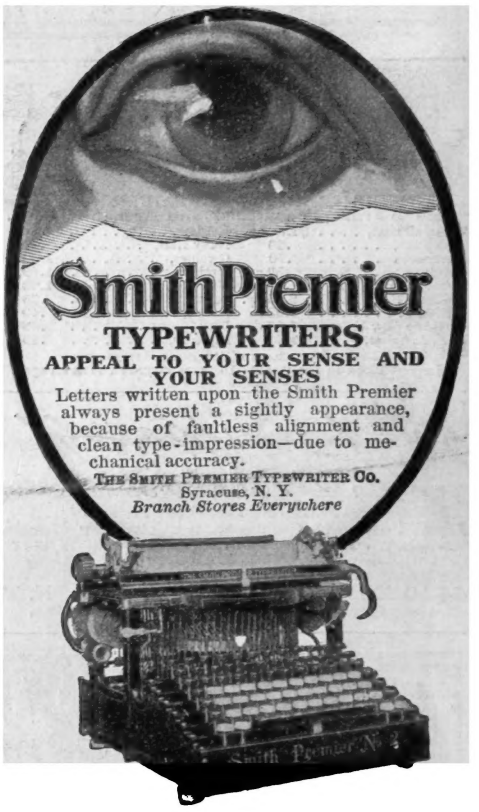

SmithPremier TYPEWRITERS

APPEAL TO YOUR SENSE AND YOUR SENSES

Letters written upon the Smith Premier always present a sightly appearance, because of faultless alignment and clean type-impression—due to mechanical accuracy.

THE SMITH PREMIER TYPEWRITER CO.
Syracuse, N. Y.
Branch Stores Everywhere

The WONDER ALTERNATOR

SOMETHING NEW

Just what you've been looking for

Only small combined alternating and direct current generator manufactured. The most interesting and useful piece of electrical apparatus ever offered. Can also be operated efficiently as a motor. Wound for any voltage up to 10. Weight 4¼ lbs. Send for descriptive circulars. Agents wanted.

THE R. M. CORNWELL CO.
406 S. Salina St., Syracuse, N. Y.

THE "BEST" LIGHT

Spectacles and Eyeglasses

are a superfluity where our lamps are used.

Portable, 100-candle power and produces a safe, white, powerful, steady light with

No odor, dirt, grease or smoke.

Every lamp warranted. Costs 2c per week.

AGENTS WANTED EVERYWHERE.

The BEST LIGHT CO.
Owners of Original Patents.
87 E. 5th St., Canton, O.

INCREASE YOUR INCOME

By Owning a Producing Pineapple Plantation in Porto Rico

Our new illustrated book tells all about pineapples, their culture, their agricultural importance, their value as a product, the cost of the production as compared with the average price, where they are grown to the best advantage, how long it takes to grow and market a crop—and, most interesting of all, how Americans of modest means are, without interference with their present occupation or business, engaging in the culture of pineapples and finding it highly profitable. *We will send this book FREE to any man or woman who takes a serious interest in agriculture along modern lines.*

LA FORTUNA FRUIT CO.
Metropolitan Bldg., New York

JESSOP'S STEEL THE VERY BEST FOR TOOLS, SAWS ETC

WM. JESSOP & SONS LTD. 91 JOHN ST. NEW YORK